



A O S E N

AXIÀMÉN
BUSINESS CORPORATION

Torres de Las Américas
Tower B, 4th Floor, Office 402. Punta
Pacífica. Ciudad de Panamá. Rep de
Panamá

Edition 2023/09

A O S E N


TBR CATALOGUE

ADVANCED MANUFACTURING FACILITIES



Semi-anechoic Room

Force & Moment Machine

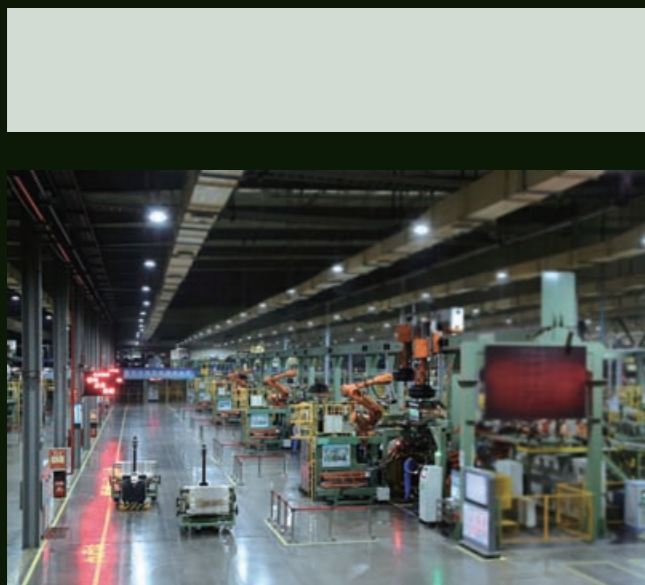

Tire Scanning Analyzer



With a professional R&D engineer team,Aosen has the advanced testing and manufacturing facilities,scientific and optimized production management and the strict quality control system to guarantee the best performance of the products.

Product Range

AP/STEER

DRIVE

TRAILER



LONG-HAUL



ALS300 AMS300 HA603 ALS386 RT905 RT906 S301



ALS201



REGIONAL



AMA300 ARS359 HD616+ LA877 ARA366 HD699+



LIGHT TRUCK



LA888 HA603 HRA06 ARA302



OFF ROAD



MD799 AFA300 HD688 MA771 MD761 HRD77 MA772 HRD07



MILITARY



LD855



COACH



ACA326 ACA286



SUPER SINGLE



AMA305 HRA05 HRA07 ALDT398



HD626 ALD308 LD851 LD858



LD856 ALD728 RD951



RD958 HRD02 ARD339 HRD68



LD853 ARD328 HRD03



HD625 ARD365 AFD307 AFD308



ALT326 HRT03 RT902 RT901



ALT128 HRA09 HA627 HA969



HD636+

CONTENT

LONG-HAUL

ALS300	02
HA603	02
AMS300	03
RT905	03
RT906	04
ALS201	05
HD626	05
ALD308	05
LD851	06
LD858	06
RT902	07
ALD728	07
RD951	08
ALS386	08
S301	09
ALT326	09
HRT03	09
LD856	10
RT901	10

HRA09	11
HA969	11
ALT128	12
HA627	12

REGIONAL

RD958	14
ARS359	14
AMA300	15
HD616+	15
LA877	16
ARA366	16
HRD02	17
ARD339	17
HRD68	17
HD636+	18
HRD03	18

HD699+	19
LD853	19
ARD328	19

LIGHT TRUCK

LA888	21
ARA302	21
HRA06	22
HA603	22
HD625	23
RAD365	23
AFD307	24
AFD308	24

OFF ROAD

MD799	26
AS870	26
H822	26
AFA300	27
HRD77	27

MD761	28
MA722	28
HRD07	29
AMA377	29
MA781	30
MA771	30

COACH

ACA326	31
ACA286	32

MILITARY

LD855	33
-------	----

SUPER SINGLE

AMA305	34
HRA05	35
HRA07	35
ALDT398	36

LONG-HAUL



ALS300



POSITION
Steer and trailer



Longitudinal pattern and lateral fine groove design provide excellent handling stability and anti-skid performance of the tire.

The special wear-resistant tread formula design for medium and long distance tires can extend the driving range and service life of tires.

The optimized ground profile and groove distribution, provide balanced ground pressure and long service life.

Groove bottom protectors and stone ejectors help to reduce stone drilling to extend casing life.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ALS300	12R22.5	18	17.5	22	9.00	930	930	3550	3250	152	149	L	1085	300	43	12
	315/80R22.5	20	17.5	22	9.00	850	850	4000	3350	156	150	K	1076	312	42	12



HA603



POSITION
Steer and trailer



Anti-sideslip, much safer
Four longitudinal grooves design for excellent steering, anti-skidding and anti-slip performance.

Anti-wear, higher mileage
Wear resistant compound provides good anti-wear performance and high mileage.

Better wet grip performance
The transverse wavy sipes design has excellent wet grip performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HA603	205/75R17.5	14	12.0	15	6.00	760	760	1550	1450	123	121	M	733	204	29	8
	205/75R17.5	16	12.0	15	6.00	830	830	1650	1550	125	123	M	733	204	29	8
	215/75R17.5	16	12.3	15	6.00	700	700	1700	1600	126	124	L	767	211	30	8
	225/75R17.5	16	13.0	16	6.75	725	725	1850	1750	129	127	L	783	226	31	9
	235/75R17.5	18	13.0	16	6.75	875	875	2725	2575	143	141	J	797	233	31	9
	225/70R19.5	14	13.0	16	6.75	760	760	1800	1700	128	126	M	811	226	32	9
	245/70R19.5	16	13.0	16	7.50	825	825	2240	2120	136	134	L	839	248	33	10
	265/70R19.5	18	13.0	16	7.50	850	850	2725	2575	143	141	L	867	262	34	10
	285/70R19.5	18	15.0	19	8.25	900	900	3000	2800	146	144	J	895	283	35	11
	305/70R19.5	18	14.0	18	9.00	850	850	3075	2900	147	145	M	923	305	36	12
	295/80R22.5	18	15.3	19	9.00	850	850	3750	3550	154	152	M	1044	298	41	12
	315/80R22.5	20	15.3	19	9.00	850	850	4000	3350	156	150	M	1076	312	43	12



AMS300



POSITION
Steer and trailer

Excellent handling and driving Performance
New vertical pattern designing provides excellent handling and driving comfort.

High mileage and driving stability
Extra-wide tread blocks and deep grooves ensure ultra high mileage and driving stability.

Much safer
The bottom of the groove is reinforced with small ribs to reduce stone retention and protect the tire casing.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AMS300	385/65R22.5	24	17.5	22	11.75	930	\	5000	\	164	\	K	1072	389	42	15
	385/65R22.5	20	17.5	22	11.75	900	\	4500	\	160(158)	\	K(L)	1072	389	42	15



RT905



POSITION
Steer and trailer

Excellent high-speed and drainage performance
Four longitudinal pattern grooves provide the good steering, high speed and drainage performance.

Stronger carcass, retreadable
Reinforced bead design provides stronger loading performance, excellent durability and retreadability.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
RT905	255/70R19.5	14	13.0	16	6.75	760	760	1800	1700	128	126	M	811	226	32	9
	11R22.5	16	13.0	16	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	255/70R22.5	16	13.0	16	7.50	830	830	2500	2300	140	137	L	930	255	37	10
	295/75R22.5	16	13.0	16	9.00	830	830	3000	2725	146	143	M	1014	298	40	12
	11R24.5	16	13.0	16	8.25	830	830	3250	3000	149	146	M	1104	279	43	11



RT906



POSITION
All position

Low heat generation, much safer
Three zig-zag longitudinal pattern grooves, combined with crack pattern, provide good wet resistance and good heat dispersion.

Anti-eccentric wear, longer service life
Using high anti-wear and low heat generation rubber compound ensure long mileage and high fuel efficiency.

Better handling for safe driving
Enclosed tire shoulder design provides good steering performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
RT906	8.5R17.5	12	13.3	17	6.00	625	625	1450	1400	121	120	L	802	215	32	8
	9.5R17.5	16	13.3	17	6.75	750	750	1850	1750	129	127	L	842	240	33	9
	235/75R17.5	18	13.0	16	6.75	875	875	2725	2725	143	141	J	797	233	31	9
	245/70R19.5	16	13.0	16	7.50	825	825	2240	2120	136	134	L	839	248	33	10
	265/70R19.5	16	13.0	16	7.50	775	775	2500	2360	140	138	L	867	262	34	10
	9R22.5	14	12.0	15	6.75	830	830	2240	2120	136	134	M	974	229	38	9
	10R22.5	16	12.0	15	7.50	850	850	2800	2650	144	142	L	1019	254	40	10
	11R22.5	16	14.0	18	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	12R22.5	18	15.0	19	9.00	830	830	3350	3075	152	149	M	1085	300	43	12
	275/70R22.5	16	15.3	19	8.25	900	900	3150	2900	148	145	L	958	276	38	11
	275/80R22.5	16	13.0	16	8.25	750	750	2900	2725	145	143	L	1012	276	40	11
	295/75R22.5	14	15.0	14	9.00	760	760	2800	2575	144	141	L	1014	298	40	12
	295/80R22.5	18	15.0	19	9.00	850	850	3750	3550	154	152	M	1044	298	41	12
	315/70R22.5	18	15.3	19	9.00	900	900	3750	3550	154	150	L	1014	312	40	12
	315/80R22.5	20	15.0	19	9.00	850	850	4000	3350	156	150	L	1076	312	42	12
285/75R24.5	16	11.0	14	8.25	830	830	3075	2800	147	144	M	1050	283	41	11	



ALS201



POSITION
Steer



Anti-wear, higher mileage

The wider tread design increases the ground contact area and improves the anti-wear performance.

More durable, longer service life

To increase bonding force between steel wire. Strong carcass for long life.

Low fuel consumption, high economical efficiency

Straight groove design for lower rolling resistance and reduce fuel consumption

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ALS201	12R22.5	18	17.3	21	9.00	930	930	3350	3250	152	149	L	1085	300	43	12
	315/80R22.5	18	17.3	21	9.00	830	830	3750	3450	154	151	M	1076	312	42	12



HD626



POSITION
Drive



Excellent driving and traction performance

Big block pattern ensures excellent driving and stronger traction performance.

Better wet grip performance

The transverse wavy sipe design provides excellent wet grip performance.

Low heat generation, longer service life

The open shoulder design ensures better heat dissipation.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HD626	12R22.5	18	22.0	28	9.00	930	930	3350	3250	152	149	M	1085	300	43	12



ALD308



POSITION
Drive



Anti-wear, higher mileage

The wider tread design increases the ground contact area and improves the anti-wear performance.

Safe and durable

Optimized bead design improves the durability by about 10%, and reduces the failure rate.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ALD308	11R22.5	16	21.5	27	8.25	850	850	3150	2900	148	145	L	1054	279	41	11



LD851



POSITION
Drive



Stronger loading capability

With strengthened bead design and improving the steel wire strength, the loading performance is increased by 20%.

Self-cleaning, prolong the using life

Small bulge in the bottom of grooves can effectively pop out the stones.

Anti-tear, stronger carcass

Tread rubber uses RSS+ silica+tear resistant resin, which can improve the strength of rubber. Tear resistant resin reinforces rubber toughness.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LD851	7.50R16LT	14	13.3	17	6.00G	770	770	1500	1320	122	118	K	805	215	32	8
	8.25R16LT	16	14.5	18	6.50H	770	770	1800	1600	128	124	K	855	235	34	9
	9.00R20	16	16.0	20	7.00	900	900	2800	2650	144	142	K	1019	259	40	10
	10.00R20	18	17.0	21	7.50	930	930	3250	3000	149	146	K	1054	278	41	11
	11.00R20	18	18.0	23	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	12.00R20	18	18.0	23	8.50	830	830	3750	3450	154	151	K	1125	315	44	12
	13R22.5	18	20.0	25	9.75	850	850	3750	3350	154	150	K	1124	320	44	13



LD858



POSITION
Drive



Excellent driving and traction performance

Big block pattern ensures excellent driving and stronger traction performance.

Better drainage performance

Special pattern design can effectively avoid skidding on rainy day, ensuring driving safety.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LD858	11R22.5	16	18.0	23	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	12R22.5	18	19.7	25	9.00	930	930	3550	3250	152	149	M	1085	300	43	12
	315/80R22.5	18	19.7	25	9.00	830	830	3750	3450	154	151	M	1076	318	42	13



RT902



POSITION Drive and trailer

Low heat generation, longer service life
Low generation, higher driving mileage, and excellent fuel efficiency.

Anti-wear, high mileage
Low profile and wider tread design ensures even wear.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
			Overall Diameter	Section Width	Overall Diameter	Section Width										
RT902	385/65R22.5	20	15.0	19	11.75	900	\	4500	\	160(158)	\	K(L)	1072	389	42	15
	425/65R22.5	20	16.0	20	12.25	825	\	5150	\	165	\	K	1124	422	44	17
	445/65R22.5	20	17.0	21	13.00	900	\	5800	\	169	\	K	1150	444	45	17



ALD728



POSITION Drive

Better grip performance
Big block pattern provides excellent grip and stronger traction.

Low heat generation, longer service life
The open shoulder design ensures fast heat dissipation.

Anti-puncture for safe driving
Better anti-puncture performance ensures safe driving.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
			Overall Diameter	Section Width	Overall Diameter	Section Width										
ALD728	11R22.5	16	22.0	28	8.25	850	850	3150	2900	148	145	L	1054	279	41	11
	295/75R22.5	16	22.0	28	9.00	830	830	3000	2725	146	143	L	1014	298	40	12
	11R24.5	16	22.0	28	8.25	830	830	3250	3000	149	146	L	1104	279	43	11
	285/75R24.5	16	22.0	28	8.25	830	830	3075	2800	147	144	L	1050	283	41	11



RD951



POSITION Drive

Better braking and wet grip performance
All-season pattern design, excellent driving, braking and anti-skid performance in the condition of rainy and snowy weather.

Higher mileage
Using the anti-wear carbon black+anti-tearing resin, makes the rubber more resilient.

Stronger loading capability
Reinforced bead design improves the tire's loading capacity.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
			Overall Diameter	Section Width	Overall Diameter	Section Width										
RD951	215/75R17.5	16	15.1	19	6.00	700	700	1700	1600	126	124	L	767	211	30	8
	215/75R17.5	18	15.1	19	6.00	850	850	2180	2060	135	133	J	767	211	30	8
	225/70R19.5	14	15.5	20	6.75	760	760	1800	1700	128	126	M	811	226	32	9
	245/70R19.5	16	15.5	20	7.50	825	825	2240	2120	136	134	L	839	248	33	10
	12R22.5	18	21.0	26	9.00	930	930	3550	3250	152	149	M	1085	300	43	12
	275/80R22.5	16	17.0	21	8.25	750	750	2900	2725	145	143	L	1012	276	40	11
	295/60R22.5	16	20.0	25	9.00	900	900	3350	3075	150	147	K	926	292	36	11
	295/80R22.5	18	21.0	26	9.00	850	850	3750	3550	154	152	M	1044	298	41	12
	315/60R22.5	16	20.3	26	9.75	900	900	3550	3150	152	148	L	950	313	37	12
	315/60R22.5	20	20.3	26	9.75	900	900	3650	3350	153	150	L	950	313	37	12
	315/70R22.5	18	21.0	26	9.00	900	900	3750	3350	154	150	L	1014	312	40	12
	315/80R22.5	20	21.0	26	9.00	850	850	4000	3350	156	150	L	1076	312	42	12
	305/75R24.5	18	19.0	24	9.00	850	850	3750	3250	154	149	K	1080	305	43	12



ALS386



POSITION Steer and trailer

New appearance design
Variable pattern design changes with tire wearing; the new product image gives good visual impact.

Low noise, better handling
Optimized pattern pitch distribution provides stronger handling, wet grip and low-noise performance.

Safe and durable
The reinforced carcass steel belt ensures the tire safety performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
			Overall Diameter	Section Width	Overall Diameter	Section Width										
ALS386	295/80R22.5	18	16.5	21	9.00	850	850	3550	3150	152	148	M	1044	289	41	12



S301



POSITION
Steer



Strengthened carcass and low heat generation, much safer
High strength steel cords increases the tire strength by 15%; low heat generation compound decreases the tire heating at high speed; ensuring safe driving.

Super anti-wear, high mileage and more durable
Super anti-wear tread compound improves the mileage by more than 10% than other brands.

Low fuel consumption, high economical efficiency
Low rolling resistance provides lower fuel consumption and lower operating cost, more economical.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
S301	315/80R22.5	18	17.5	22	9.00	830	830	3750	3450	154	151	M	1076	312	42	12



ALT326



POSITION
Trailer



Anti-sideslip, much safer
Four longitudinal small-angle polyline grooves have excellent grip capability, anti-skid ability and drainage performance.

Anti-wear, higher mileage
Anti-wear compound design provides higher anti-wear performance and higher mileage.

Low heat generation, longer service life
Double-layer tread design: upper layer is high anti-wear tread rubber, and lower layer is adopted low heat generation rubber, which can effectively improve safety and service life.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ALT326	295/80R22.5	18	15.3	19	9.00	850	850	3750	3550	154	152	M	1044	298	41	12



HRT03



POSITION
Trailer



Anti-sideslip, much safer
Multi longitudinal pattern grooves design provides excellent drainage and anti-sideslip performance.

Low rolling resistance, high economical efficiency
Low rolling resistance design reduces the rolling resistance to 4.5 (down about 20%) and save about 4% fuel.

Strengthened carcass, much safer
Adopting high strength steel cords, tire strength is increased about 15%, for safer driving.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRT03	385/65R22.5	20	15.0	19	9.00	900	\	4500	\	160(158)	\	K(L)	1076	312	42	12



LD856



POSITION
Drive



Low heat generation, high mileage
Deeper groove design and low heat generation compound, provide higher mileage and low fuel consumption.

Excellent loading capability, longer service life
Strengthened bead design provides better loading capability and longer service life.

Stronger carcass, retreadable
High flexion carcass ensures durability and retreadability.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LD856	11R22.5	16	22.5	28	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	12R22.5	18	18.8	26	9.00	930	930	3550	3250	152	149	L	1085	300	43	12
	295/75R22.5	14	22.5	28	9.00	760	760	2880	2575	144	141	M	1014	298	40	12
	295/75R22.5	16	22.5	28	9.00	830	830	3000	2725	146	143	M	1014	298	40	12
	315/70R22.5	18	21.3	27	9.00	850	850	3550	3150	152	148	M	1014	312	40	12
	315/80R22.5	18	18.8	26	9.00	830	830	3750	3450	154	151	L	1076	312	43	12
	11R24.5	16	20.5	26	8.25	830	830	3250	3000	149	146	M	1104	279	43	11
	285/75R24.5	16	22.5	28	8.25	830	830	3075	2800	147	144	M	1050	283	41	11



RT901



POSITION
Trailer



Stronger loading capability
Strengthened steel belt ensure better loading capability and safety.

Stronger carcass, retreadable
High flexion carcass ensures durability and retreadability.

Anti-wear, high mileage
Low profile and wider tread design ensures even wear.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
RT901	385/55R22.5	20	15.3	19	12.25	900	\	4500	\	160(158)	\	K(L)	996	386	39	15
	385/65R22.5	20	15.0	19	11.75	900	\	4500	\	160(158)	\	K(L)	1072	389	42	15
	425/65R22.5	20	16.0	19	12.25	825	\	5150	\	165	\	K	1124	422	44	17
	445/65R22.5	20	17.0	19	13.00	900	\	5800	\	169	\	K	1150	444	45	17



HRA09



POSITION
Steer and trailer

Low fuel consumption, high economical efficiency
Low rolling resistance tread compound, more fuel efficient especially on highway.

Stronger loading capability
Strengthened bead design provides better loading capability.

Lower noise
Lower noise makes the driving more comfortable.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRA09	9.00R20	16	15.5	20	7.00	900	900	2800	2650	144	142	K	1019	259	40	10
	10.00R20	16	16.0	20	7.50	830	830	3000	2725	146	143	K	1054	278	41	11
	11.00R20	18	17.0	21	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	11R22.5	16	15.0	19	8.25	850	850	3150	2900	148	145	K	1054	279	41	11



HA969



POSITION
Steer and trailer

Low heat generation, longer service life
Low heat generation and super anti-wear tread provide higher fuel efficiency and longer service life.

Stronger loading capability
Reinforced bead design improves the tire's loading capacity.

Lower noise
Lower noise makes the driving more comfortable.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HA969	11R22.5	16	14.5	18	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	295/75R22.5	16	14.5	18	9.00	830	830	3000	2725	146	143	M	1014	298	40	12
	295/80R22.5	18	14.5	18	9.00	850	850	3750	3550	154	152	M	1044	298	41	12
	385/65R22.5	20	13.0	16	11.75	900	\	4500	\	160(158)	\	K(L)	1072	389	42	15
	11R24.5	16	14.5	18	8.25	830	830	3250	3000	149	146	M	1104	279	43	11
	285/75R24.5	16	14.5	18	8.25	830	830	3075	2800	147	144	M	1050	283	41	11
	305/75R24.5	18	14.5	18	9.00	850	850	3750	3250	154	149	L	1080	305	43	12



ALT128



POSITION
Trailer

Anti-sideslip, much safer
Multi longitudinal grooves and tiny grooves on the tread design provide excellent drainage and anti-sideslip performance.

Anti-eccentric wear, longer service life
Using high anti-wear and low heat generation rubber compound ensure long mileage and high fuel efficiency.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ALT128	385/55R22.5	20	15.3	19	12.25	900	\	4500	\	160(158)	\	K(L)	996	386	39	15



HA627



POSITION
Trailer

Low noise, better driving experience
Professional low noise pattern design, excellent steering performance, anti-wear.

Low fuel consumption, high economical efficiency
Low rolling resistance tread compound, excellent high-speed performance.

Better handling for safe driving
Four longitudinal grooves design provides better handling stability.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HA627	8.5R17.5	12	13.3	17	6.00	625	625	1450	1400	121	120	L	802	215	32	8
	9.5R17.5	16	13.3	17	6.75	750	750	1850	1750	129	127	L	842	240	33	9
	215/75R17.5	16	12.3	15	6.00	700	700	1700	1600	126	124	L	767	211	30	8
	215/75R17.5	18	12.3	15	6.00	850	850	2180	2060	135	133	J	767	211	30	8
	225/75R17.5	16	13.0	16	6.75	725	725	1850	1750	129	127	L	783	226	31	9
	235/75R17.5	18	13.0	18	6.75	875	875	2725	2575	143	141	J	797	233	31	9
	245/70R19.5	16	13.0	16	7.50	825	825	2240	2120	136	134	L	839	248	33	10
	265/70R19.5	16	13.0	16	7.50	775	775	2500	2360	140	138	M	867	262	34	10
	285/70R19.5	18	15.0	19	8.25	900	900	3350	3150	150	148	J	895	283	35	11
	11R22.5	16	10.2	13	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	295/60R22.5	16	15.3	19	9.00	900	900	3250	3000	149	146	L	926	292	36	11
	295/75R22.5	14	10.2	13	9.00	830	830	3000	2725	144	141	L	1014	298	40	12
	315/60R22.5	16	15.3	19	9.75	900	900	3550	3150	152	148	L	950	313	37	12
	315/80R22.5	18	16.3	21	9.00	830	830	3750	3450	154	151	M	1076	312	42	12
	11R24.5	16	10.2	13	8.25	830	830	3250	3000	149	146	M	1104	279	43	11
285/75R24.5	16	10.2	13	8.25	830	830	3075	2800	147	144	M	1050	283	41	11	

REGIONAL



RD958



POSITION
Drive



The groove layout is specifically designed for optimum traction and self-cleaning while minimising stone holding.

Open shoulder block design combined with connected centerline blocks, resulting in even wear pattern and high mileage performance.

Broaden transverse shoulder groove design provides high heat dissipation performance which helps to improve tire durability.

Special tread compounds for resistance to cuts, chips, tearing and irregular wear.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
RD958	11R22.5	16	21.0	26	8.25	850	850	3150	2900	148	145	L	1054	279	41	11
	11R22.5	18	21.0	26	8.25	930	930	3250	3000	149	146	L	1054	279	41	11



ARS359



POSITION
Steer



Prominent overall performance
The design of vertical and horizontal pattern grooves highlights tire's overall performance.

Anti-wear, higher mileage
Low rolling resistance and anti-wear ability improve the running mileage.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ARS359	10.00R20	18	15.0	19	7.50	930	930	3250	3000	149	146	K	1049	278	41	11
	11.00R20	16	15.5	20	8.00	830	830	3350	3075	150	147	K	1085	293	43	12
	11.00R20	18	15.5	20	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	12.00R20	20	16.5	21	8.50	900	900	4000	3650	156	153	J	1125	315	44	12



AMA300



POSITION
All position



High mileage and driving stability
Extra-wide tread blocks ensure ultra high mileage and driving stability.

Prevent uneven wear
The small grooves between the blocks helps prevent uneven wear, which enables longer mileage.

Excellent traction performance
The main tread grooves maximize traction performance under all applications.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AMA300	315/80R22.5	20	16.3	20.5	9.00	850	850	4000	3350	156	150	L	1076	312	42	12
	12.00R24	20	16.0	20	8.50	900	900	4500	4125	160	157	L	1266	315	48	12



HD616+



POSITION
All position



Stronger loading capability
Tire carcass uses high strengthened steel cords which is 1.2 times than normal one, improving the loading capability.

Anti-wear, higher mileage
Tread compound adopts anti-wear carbon black+silica, making the rubber much closer, more anti-wear.

Low heat generation, more durable
Zig-zag pattern and open shoulder grooves design can improve steering performance. Suitable for all kinds of road conditions, low heat generation, more durable.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HD616+	7.50R16LT	14	12.0	15	6.00G	770	770	1500	1320	122	118	K	805	215	32	8
	8.25R16LT	16	12.5	16	6.50H	770	770	1800	1600	128	124	K	855	235	34	9
	9.00R20	16	15.5	20	7.00	900	900	2800	2650	144	142	K	1019	259	40	10
	10.00R20	16	16.5	21	7.50	830	830	3000	2725	146	143	K	1054	278	41	11
	10.00R20	18	16.5	21	7.50	930	930	3250	3000	149	146	K	1054	278	41	11
	11.00R20	16	15.3	19	8.00	830	830	3350	3075	150	147	L	1085	293	43	12
	11.00R20	18	15.3	19	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	12.00R20	18	15.5	20	8.50	830	830	3750	3450	154	151	K	1125	315	44	12
	12.00R24	20	12.3	15	8.50	900	900	4500	4125	160	157	L	1226	315	48	12
	11R22.5	16	16.7	21	8.25	850	850	3150	2900	148	145	L	1054	279	41	11
	12R22.5	18	17.0	21	9.00	930	930	3550	3250	152	149	M	1085	300	43	12
	13R22.5	18	16.8	21	9.75	850	850	3750	3350	154	150	K	1124	320	44	13
	315/80R22.5	18	18.3	23	9.00	830	830	3750	3450	154	151	M	1076	312	42	12
	11R24.5	16	17.0	21	8.25	830	830	3250	3000	149	146	M	1104	279	43	11



LA877



POSITION
All position



Stronger loading capability

Tire carcass uses high strengthened steel cords which is 1.2 times than normal one, improving the loading capability.

Anti-wear, higher mileage

Tread compound adopts anti-wear carbon black+silica, making the rubber much closer, more anti-wear.

Low heat generation, more durable

Zig-zag pattern and open shoulder grooves design can improve steering performance. Suitable for all kinds of road conditions, low heat generation, more durable.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LA877	195/85R16	12	10.0	13	5.50F	600	600	1180	1120	114	112	L	750	185	30	7
	6.50R16LT	12	10.0	13	5.50F	670	670	1060	925	110	105	K	750	185	30	7
	7.00R16LT	12	12.0	15	5.50F	670	670	1215	1060	115	110	L	775	200	31	8
	7.00R16LT	14	12.0	15	5.50F	770	770	1320	1180	118	114	L	775	200	31	8
	7.50R16LT	14	12.0	15	6.00G	770	770	1500	1320	122	118	L	805	215	32	8
	8.25R16LT	16	12.5	16	6.50H	770	770	1800	1600	128	124	K	855	235	34	9
	8.25R20	16	14.5	18	6.50	930	930	2430	2300	139	137	L	974	236	38	9
	12.00R24	20	18.5	23	8.50	900	900	4500	4150	160	157	L	1226	315	48	12
	13R22.5	20	16.5	21	9.75	930	930	4000	3650	156	153	J	1124	320	44	13
	315/80R22.5	20	16.3	21	9.00	850	850	4000	3350	156	150	L	1076	312	42	12



ARA366



POSITION
All position



Stronger loading capability

Tire carcass uses high strengthened steel cords which is 1.2 times than normal one, improving the loading capability.

Anti-wear, higher mileage

Tread compound adopts anti-wear carbon black+silica, making the rubber much closer, more anti-wear.

Low heat generation, more durable

Zig-zag pattern and open shoulder grooves design can improve steering performance. Suitable for all kinds of road conditions, low heat generation, more durable.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ARA366	10.00R20	16	16.0	20	7.50	830	830	3000	2725	146	143	K	1054	278	41	11
	10.00R20	18	16.0	20	7.50	930	930	3250	3000	149	146	K	1054	278	41	11
	9.00R20	16	15.5	20	7.00	900	900	2800	2650	144	142	K	1019	259	40	10



HRD02



POSITION Drive



Excellent driving and traction performance
Big block pattern ensures excellent driving and stronger traction performance.

Low rolling resistance, more fuel efficient
Single direction pattern design, low rolling resistance and better wet-skid resistance.

Low heat generation
The design of the heat sink in the shoulder prevents the high heating.

Self-cleaning, prolong the using life
Small bulge in the bottom of grooves can effectively pop out the stones.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRD02	315/80R22.5	20	22.0	28	9.00	850	850	4000	3350	156	150	K	1076	312	42	12



ARD339



POSITION Drive



Stronger traction performance, better handling
Unique block pattern design, with good ground contact performance, provides excellent traction and passing performance.

Anti-wear, anti-tear, anti-puncture
Special tread compound design provides excellent anti-tear, anti-puncture and anti-wear performance and longer service life.

Stronger loading capability
Strengthened bead design improves the bearing capacity of the tire.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ARD339	13R22.5	20	22.3	28	9.75	875	875	4000	3350	156	150	G	1124	320	44	13



HRD68



POSITION Drive



Excellent driving and traction performance
Big block pattern ensures excellent grip and stronger traction performance.

Anti-wear, anti-tear, anti-puncture
Special tread compound design provides excellent anti-tear, anti-puncture and anti-wear performance and high service life.

Stronger loading capability
Strengthened bead design improves the bearing capacity of the tire.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRD68	12.00R24	20	21.5	27	8.50	900	900	4500	4125	160	157	J	1226	315	48	12



HD636+



POSITION Steer and trailer



Low fuel consumption, high economical efficiency
Optimized profile design and low rolling resistance tread compound provide low heat generation and low fuel consumption.

Safety guaranteed
Four longitude grooves design ensures the tire uniformly forced, so the vehicle can runs more smoothly.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HD636+	10.00R20	16	16.5	21	7.50	830	830	3000	2725	146	143	K	1054	278	41	11
	11.00R20	16	16.5	21	8.00	830	830	3350	3075	150	147	K	1085	293	43	12
	11.00R20	18	16.5	21	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	315/80R22.5	20	14.3	18	8.00	850	850	4000	3350	156	150	L	1085	300	43	12



HRD03



POSITION Drive



Low fuel consumption, high economical efficiency
Low rolling resistance tread compound, more fuel efficient.

Higher mileage
Good heat dissipation ability improves the driving mileage.

Better handling
Middle block and grooves design provide excellent driving performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRD03	11R22.5	16	22.5	28	8.25	850	850	3150	2900	148	145	M	1054	279	41	11
	295/75R22.5	14	22.5	28	9.00	760	760	2800	2575	144	141	L	1014	298	40	12
	295/75R22.5	16	22.5	28	9.00	830	830	3000	2725	146	143	M	1014	298	40	12
	255/70R22.5	16	21.0	26	7.50	800	800	2500	2300	140	137	L	930	255	37	10
	11R24.5	16	22.5	28	8.25	830	830	3250	3000	149	146	M	1104	279	43	11
	285/75R24.5	16	22.5	28	8.25	830	830	3075	2800	147	144	M	1050	283	41	11



HD699+



POSITION
All position 

Better handling for safe driving
The longitudinal grooves design provides better handling and steering performance.

Excellent loading capability
Strengthened carcass design ensures better loading capability.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HD699+	11.00R20	18	18.5	21	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	12.00R24	20	16.3	21	8.50	900	900	4500	4125	160	157	L	1226	315	48	12



LD853



POSITION
Drive 

Low fault rate, longer service life
Reinforced pattern block design prevents tread chunking.

Low rolling resistance, more fuel efficient
Lightweight design reduces the rolling resistance about 10% and save about 2% fuel.

Stronger loading capability
Optimizing the bead design by FEA and using the high strengthened steel cords, tire's loading ability is improved about 10%.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LD853	10.00R20	18	20.5	26	7.50	930	930	3250	3000	149	146	K	1054	278	41	11



ARD328



POSITION
Drive 

Stronger loading capability
Strengthened bead design provides better loading capability.

Anti-wear, higher mileage
The wider tread design increases the ground contact area and improves the anti-wear performance.

Low noise, better handling
Three unequal pitch design and disordered pattern can effectively reduce noise.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ARD328	295/80R22.5	18	20.0	25	9.00	850	850	4000	3350	154	152	K	1044	298	41	12
	315/80R22.5	20	20.0	25	9.00	850	850	3750	3550	156	150	L	1076	312	42	12



LIGHT TRUCK



LA888

HIGH MILEAGE
 SAFE
 HANDLING
 ANTI-WEAR
 POSITION All Position

Longer service life
 Unique tread design and compound provide longer mileage and reduce uneven wear.

Excellent handling and steering performance
 Four longitudinal grooves design, provides excellent handling and steering performance and good drainage performance.

Driving stability
 Optimised belt structure designing, help the ground area of tire be more even and improve driving stability.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LA888	7.00R16	12	13.5	17	5.50F	670	670	1215	1060	115	110	L	775	200	31	8
	7.50R16	14	13.5	17	6.00F	770	770	1500	1320	122	118	L	508	215	32	8
	8.25R16	16	13.5	17	6.50F	770	770	1800	1600	128	124	L	855	235	34	9



HRA06

HIGH MILEAGE
 SAFE
 WET GRIP
 POSITION All position

Better wet grip performance
 Three longitudinal zigzag pattern design, with super guiding performance and good anti wet and slippery performance.

Much safer
 Unique shoulder lug design protects against cracking from external shocks.

Longer service life
 Unique tread design and compound provide longer mileage.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRA06	12R22.5	18	15.3	19	9.00	930	930	3550	3250	152	149	M	1085	300	43	12
	7.50R16LT	14	10.0	13	6.00G	770	770	1500	1320	122	118	L	805	215	32	8



HA603

ANTI-WEAR
 WET GRIP
 POSITION Steer and trailer

Anti-sideslip, much safer
 Four longitudinal grooves design for excellent steering, anti-skidding and anti-slip performance.

Anti-wear, higher mileage
 Wear resistant compound provides good anti-wear performance and high mileage.

Better wet grip performance
 The transverse wavy sipes design has excellent wet grip performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HA603	205/75R17.5	14	12.0	15	6.00	760	760	1550	1450	123	121	M	733	204	29	8
	205/75R17.5	16	12.0	15	6.00	830	830	1650	1550	125	123	M	733	204	29	8
	215/75R17.5	16	12.3	15	6.00	700	700	1700	1600	126	124	L	767	211	30	8
	225/75R17.5	16	13.0	16	6.75	725	725	1850	1750	129	127	L	783	226	31	9
	235/75R17.5	18	13.0	16	6.75	875	875	2725	2575	143	141	J	797	233	31	9
	225/70R19.5	14	13.0	16	6.75	760	760	1800	1700	128	126	M	811	226	32	9
	245/70R19.5	16	13.0	16	7.50	825	825	2240	2120	136	134	L	839	248	33	10
	265/70R19.5	18	13.0	16	7.50	850	850	2725	2575	143	141	L	867	262	34	10
	285/70R19.5	18	15.0	19	8.25	900	900	3000	2800	146	144	J	895	283	35	11
	305/70R19.5	18	14.0	18	9.00	850	850	3075	2900	147	145	M	923	305	36	12
	295/80R22.5	18	15.3	19	9.00	850	850	3750	3550	154	152	M	1044	298	41	12
	315/80R22.5	20	15.3	19	9.00	850	850	4000	3350	156	150	M	1076	312	43	12



ARA302

HIGH MILEAGE
 ANTI-WEAR
 HEAVY LOAD
 POSITION All position

Anti-eccentric wear, longer service life
 Shoulder pattern width/middle pattern block>1.4, effectively reduce eccentric wear.

Anti-wear, higher mileage
 Super wide tread design ensures even wear and improves the mileage by 10%.

Low fault rate, more durable
 High strength steel cords increases by 15%, and the upgraded bead design can reduce the crack possibility by 20%.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ARA302	6.50R16LT	12	10.0	13	5.50F	670	670	1060	925	110	105	L	750	185	30	7
	7.00R16LT	14	11.0	14	5.50F	770	770	1320	1180	118	114	L	775	200	31	8
	7.50R16LT	14	13.5	17	6.00G	770	770	1500	1320	122	118	L	805	215	32	8
	8.25R16LT	16	14.5	18	6.50H	770	770	1800	1600	128	124	L	855	235	34	9



HD625



POSITION Drive

- Low noise, more comfortable**
Optimized pattern design makes the noise reduced by 2dB and the driving is more comfortable.
- Longer service life**
The bump design in the groove bottom can effectively reduce the problem of puncture and tear.
- Anti-slip, much safer**
The optimized design of tread groove and steel sheet can effectively improve the anti-sideslip performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HD625	205/75R17.5	16	12.0	15	6.00	830	830	1650	1550	125	123	M	733	204	29	8
	215/75R17.5	16	15.1	19	6.00	700	700	1700	1600	126	124	L	767	211	30	8
	225/75R17.5	16	13.0	16	6.75	725	725	1850	1750	129	127	L	783	226	31	9
	235/75R17.5	18	13.0	16	6.75	875	875	2725	2575	143	141	J	797	233	31	9
	245/70R19.5	16	15.5	20	7.50	825	825	2240	2120	136	134	L	839	248	33	10
	265/70R19.5	18	14.0	18	7.50	850	850	2725	2575	143	141	L	867	262	34	10
	285/70R19.5	18	15.0	19	8.25	900	900	3000	2800	146	144	J	895	283	35	11
	305/70R19.5	18	16.0	20	9.00	850	850	3075	2900	147	145	M	923	305	36	12



ARD365



POSITION Drive

- Self-cleaning, prolong the using life**
Small bulge in the bottom of grooves can effectively pop out the stones.
- Better grip performance**
Large block design provide the stronger grip force.
- Excellent drainage performance**
Three longitudinal groove pattern design provides excellent drainage performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ARD365	215/75R17.5	16	15.1	19	6.00	700	700	1700	1600	126	124	L	767	211	30	8
	215/75R17.5	18	15.1	19	6.00	850	850	2180	2060	135	133	J	767	211	30	8
	235/75R17.5	16	13.0	16	6.75	775	775	2000	1900	132	130	M	797	233	31	9
	235/75R17.5	18	13.0	16	6.75	875	875	2725	2527	143	141	J	797	233	31	9



AFD307



POSITION Drive

- Strong driving force**
The bionic spine design improves the stability of the pattern, and the lateral claw groove provides strong driving force.
- Low fault rate, more durable**
The design of the heat sipes at the shoulder reduces the risk of shoulder separation.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AFD307	7.50R16LT	14	16.0	20	6.00G	770	770	1500	1320	122	118	K	805	215	32	8



AFD308



POSITION Drive

- Strong driving force**
The bionic curved arm is designed for strong driving force.
- Strengthened carcass, more stable**
The reinforced bridge design makes the pattern become an organic whole to keep the running stability.
- Low fault rate, more durable**
The design of the heat sipes at the shoulder reduces the risk of shoulder separation.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AFD308	7.50R16LT	14	18.3	23	6.00G	770	770	1500	1320	122	118	F	805	215	32	8

OFF ROAD



MD799



POSITION
All position



Stronger loading capability
Strengthened bead design provides better loading capability.

Anti-puncture for safe driving
Big block pattern design provides excellent puncture resistance and cutting resistance ability.

Self-cleaning design for longer service life
The design of "pop-up" stones protects the bottom of the ditch and resists sand and gravel.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
MD799	12.00R24	24	31.0	39	8.50	930	930	5000	4750	164	162	F	1226	315	42	12



AS870



POSITION
All position



4+0° belt layer structure, explosion-proof ability increased by 35% .

Deeper pattern design, better driving performance, stronger prick resistance.

Thickened tire side design is adopted to improve tire safety and avoid puncture wounds.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AS870	12.00R20	20	30.0	38	8.50	900	900	4000	3650	156	153	B	1125	315	44	12



H822



POSITION
All position



Strong carcass, longer service life
Big block deeper pattern is specially designed for mining road, making the tread more stronger.

Excellent driving and grip performance
The grooves bottom is designed with steps and special heat dissipation holes, which improves the grip and driving force.

Anti-wear, anti-tear, anti-puncture
Special tread compound for mining, excellent anti-tear, anti-puncture, anti-wear performance and longer service life.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
H822	12.00R20	20	24.5	31	8.50	900	900	4000	3650	156	153	B	1125	315	44	12



AFA300



POSITION All position

Stronger loading capability
Strengthened bead design provides better loading capability.

Anti-puncture for safe driving
Big block pattern design provides excellent puncture resistance and cutting resistance ability.

Self-cleaning design for longer service life
The design of "pop-up" stones protects the bottom of the ditch and resists sand and gravel.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AMA300	12.00R24	20	31.0	39	8.50	900	900	4500	4125	160	157	F	1266	315	48	12



HD688



POSITION All position

Stronger loading capability
Strengthened bead design provides better loading capability.

Anti-puncture for safe driving
Big block pattern design provide excellent anti-puncture performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HD688	12.00R24	20	21.0	26	8.50	900	900	4500	4125	160	157	K	1226	328	48	13



HRD77



POSITION Drive

Excellent driving and grip performance
Big block and deeper groove design provide good driving force and climbing force off the road.

Low heat generation and self-cleaning
Open shoulder design helps the heat dissipation and pop out the stones.

Anti-wear, anti-tear, anti-puncture
Special tread compound for mining, excellent anti-tear, anti-puncture, anti-wear performance and longer service life.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRD77	425/65R22.5	20	24.0	30	12.25	830	\	5150	\	165	\	J	1124	422	44	17



MD761



POSITION All position

Excellent driving and grip performance
Big block pattern is specially designed for mining road, providing better driving and grip performance. Low heat generation.

Anti-wear, anti-tear, anti-puncture
Special tread compound for mining, excellent anti-tear, anti-puncture, anti-wear performance and longer service life.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
MD761	10.00R20	18	22.8	29	7.50	930	930	3250	3000	149	146	D	1054	278	41	11
	13R22.5	18	21.0	26	9.75	850	850	3750	3350	154	150	K	1124	320	44	13



MA772



POSITION All position

Anti-wear, anti-tear, anti-puncture
Special tread compound for mining, excellent anti-tear, anti-puncture, anti-wear performance and longer service life.

Stronger loading capability, more durable
With strengthened bead design and improving the steel wire strength, the tire's durability is increased by 20%.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
MA772	12.00R20	18	20.5	26	8.50	830	830	3750	3450	154	151	F	1125	315	44	12
	12.00R20	20	20.5	26	8.50	900	900	4000	3650	156	153	F	1125	315	44	12
	12.00R20	22	20.5	26	8.50	960	960	4250	3875	158	155	F	1125	315	44	12



HRD07



POSITION
All position

Stronger loading capability, more durable

With strengthened bead design and improving the steel wire strength, the tire's durability is increased by 20%.

Excellent driving and climbing performance

Longitudinal deep pattern design provides good driving and grip force off the road.

Anti-tear, stronger carcass

Tread rubber uses RSS+ silica+tear resistant resin, which can improve the strength of rubber. Tear resistant resin reinforces rubber toughness.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRD07	10.00R20	18	20.3	26	7.50	930	930	3250	3000	149	146	K	1054	278	41	11
	11.00R20	18	21.3	27	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	12.00R20	18	21.3	27	8.50	900	900	4000	3650	154	151	K	1125	315	44	12



MA781



POSITION
All position

Excellent driving and grip performance

Big block pattern is specially designed for mining road, providing better driving and grip performance. Low heat generation.

Anti-wear, anti-tear, anti-puncture

Special tread compound for mining, excellent anti-tear, anti-puncture, anti-wear performance and longer service life.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
MA781	11.00R20	18	23.5	30	8.00	930	930	3550	3250	152	149	B	1085	293	43	12
	12.00R20	18	23.3	29	8.50	830	830	3750	3450	154	151	D	1125	315	44	12



AFA377



POSITION
All position

Strong carcass, longer service life

Big block deeper pattern is specially designed for mining road, making the tread more stronger.

Excellent driving and grip performance

The grooves bottom is designed with steps and special heat dissipation holes, which improves the grip and driving force.

Stronger loading capability

The carcass uses high strength steel wire which is 1.15 time stronger than normal steel wire. Loading capacity is stronger.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AFA377	8.25R16	16	20.3	26	6.50H	770	770	1800	1600	128	124	B	855	235	34	9
	12.00R20	18	25.8	33	8.50	830	830	3750	3450	154	151	B	1125	315	44	12



MA771



POSITION
All position

Stronger loading capability

Strengthened bead design provides better loading capability.

Anti-puncture for safe driving

Big block pattern design provide excellent anti-puncture performance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
MA771	10.00R20	18	19.0	24	7.50	930	930	3250	3000	149	146	K	1054	278	41	11
	11.00R20	18	19.0	24	8.00	930	930	3550	3250	152	149	K	1085	293	43	12
	11R22.5	16	25.5	32	8.25	850	850	3150	2900	148	145	J	1054	279	41	11
	12R22.5	18	25.0	31	9.00	930	930	3550	3250	152	149	K	1085	300	43	12
	295/80R22.5	18	22.0	28	9.00	900	900	3550	3250	152	149	J	1044	298	41	12
	315/80R22.5	20	22.3	28	9.00	850	850	4000	3350	156	150	L	1076	312	42	12
	11R24.5	16	25.5	32	8.25	830	830	3250	3000	149	146	J	1104	279	43	11



ACA326



POSITION All position 

- High mileage**
Super anti-wear and low heat generated tread compound provide longer service life. Ultra wide driving surface increased contact area and helps fight irregular wear to improve mileage.
- More comfortable**
The unique pattern design can effectively reduce the noise.
- Better grip ability and more fuel-efficient**
Small transverse grooves can improve the grip and heat dispersion ability.



ACA286



POSITION All position 

- Anti-scratch, much safer**
The sidewall thickness is increased by 3mm, to improve anti-scratch performance.
- Higher mileage**
The tread adopts high quality bacon rubber and IAF ultra-wear-resistant carbon black, and the mileage is longer.
- Anti-slip, excellent braking performance**
The tread pattern is designed with interlocking pattern, which provides a powerful grip of 1.05G on wet and slippery road, effectively shortening the braking distance.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ACA326	11R22.5	16	17.5	22	8.25	850	850	3150	2900	148	145	L	1054	279	41	11

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ACA286	11R22.5	16	18.0	23	8.25	850	850	3150	2900	148	145	L	1054	279	41	11

MILITARY

SUPER SINGLE



LD855

POSITION
All position 

Excellent comprehensive performance, optimized balance for high wear resistance, safety and economy.

Perfect performance combination for accurate steering, excellent braking and great handling.



AMA305



POSITION
Drive and trailer 

Wide-base design for higher payload and flotation so tires maintain grip and traction without digging into the ground.

Design feature that prevents stones from becoming trapped in the tread to protect the casing from potential damage.

Optimized casing construction controls casing growth which strengthens footprint, improves resistance to irregular wear, and enhance retreadability.

Special tread compound, improved resistance to cuts and chunking.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
LD855	14.00R20LT	20	20.3	26	10.0	790	790	5000	4625	164	161	K	1253	375	49	15
	14.00R20LT	20	20.3	26	10.0	790	790	5000	4625	164	161	F	1253	375	49	15

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
AMA305	385/65R22.5	24	18.0	23	11.75	930	\	5000	\	164	\	K	1072	389	42	15
	445/65R22.5	20	18.0	23	13.00	900	\	5000	\	169	\	K	1150	444	45	17



HRA05



POSITION
Trailer

Low noise, enjoy more comfortable driving
Optimizing the pattern pitch distribution, the noise is reduced to 73dB, for more comfortable driving.

Strengthened carcass, much safer
0° belt high strength structure, up to the standard value of 242.6%, for safe driving.

Low fuel consumption, high economical efficiency
Adopting the new synthetic rubber NDBR and highly dispersed silica, the tire has good resilience and low lag loss, so to reduce the rolling resistance and the fuel consumption by 3%.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRA05	445/45R19.5	20	13.5	17	15.0	900	\	4500	\	160	\	L	895	446	35	18



ALDT398



POSITION
Drive and trailer

Low noise, enjoy more comfortable driving
Optimizing the pattern pitch distribution, the noise is reduced to 73dB, for more comfortable driving.

Strengthened carcass, much safer
0° belt high strength structure, up to the standard value of 242.6%, for safer driving.

Low fuel consumption, high economical efficiency
Adopting the new synthetic rubber NDBR and highly dispersed silica, the tire has good resilience and low lag loss, so to reduce the rolling resistance and the fuel consumption by 3%.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
ALDT398	445/50R22.5	20	17.3	22	14.0	830	\	4625	\	161	\	L	1018	445	40	18



HRA07



POSITION
Drive and trailer

Low noise, enjoy more comfortable driving
Optimizing the pattern pitch distribution, the noise is reduced to 73dB, for more comfortable driving.

Strengthened carcass, much safer
0° belt high strength structure, up to the standard value of 242.6%, for safe driving.

Low fuel consumption, high economical efficiency
Adopting the new synthetic rubber NDBR and highly dispersed silica, the tire has good resilience and low lag loss, so to reduce the rolling resistance and the fuel consumption by 3%.

Pattern	Size	PR	Tread Depth		Standard Rim	Pressure(kPa)		Max. Load(kg)		Load Index		Speed Grade	Inflated Diameter			
			mm	1/32in		Single	Dual	Single	Dual	Single	Dual		mm		inch	
													Overall Diameter	Section Width	Overall Diameter	Section Width
HRA07	435/50R19.5	20	13.5	17	14.0	900	\	4500	\	160	\	L	931	438	37	17

NOTES
