




PCR^{TIRE} CATALOGUE

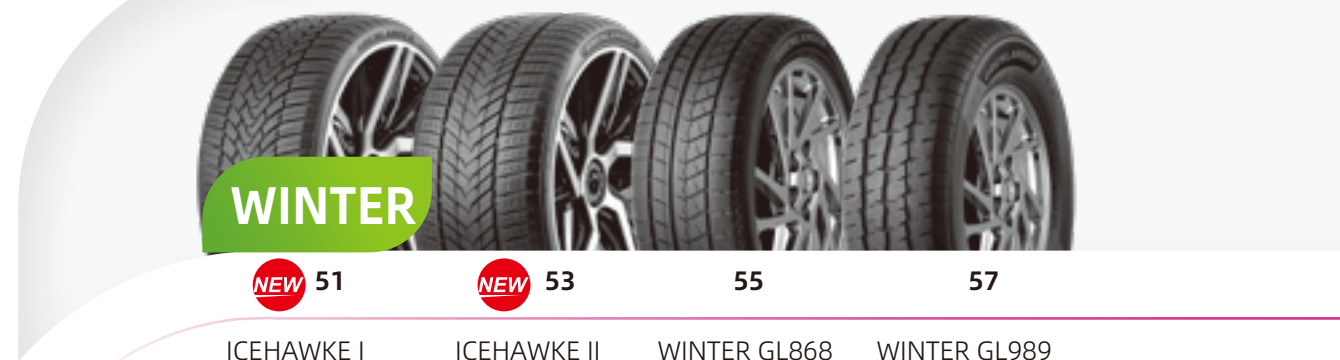

GREENLANDER

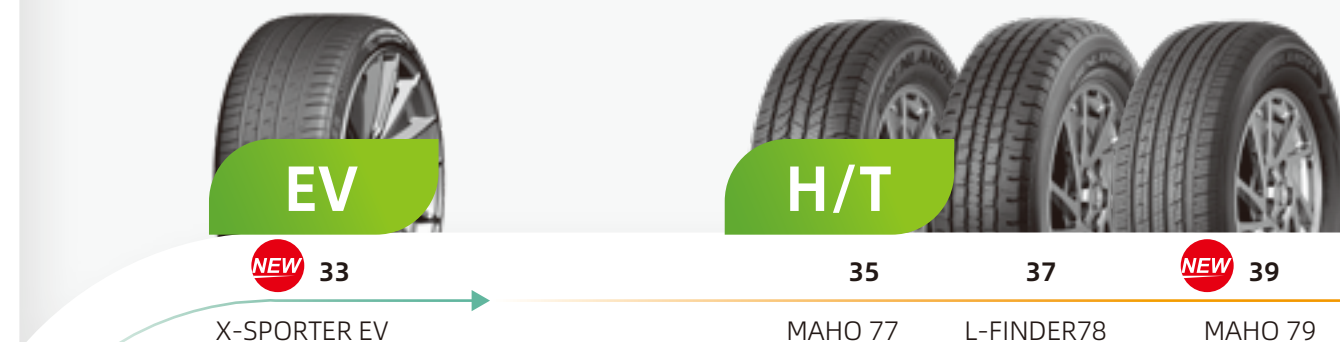

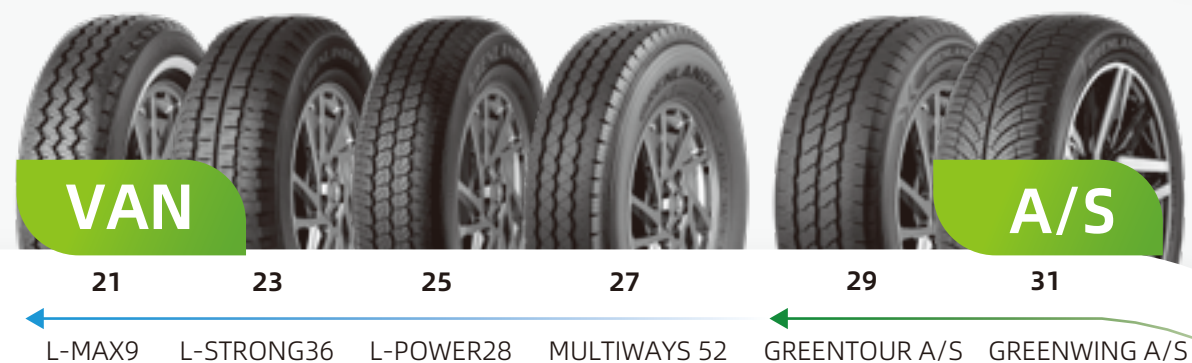


KINGPRO ONE

NEW




Closed shoulder design

Effectively reduce tire noise, while ensuring tire handling performance and cornering performance.

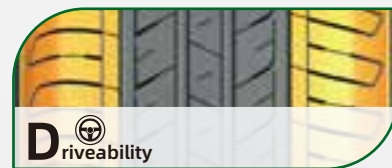

4-wide longitudinal grooves design

Effectively reduce the hydroplaning problem of tires and improve the wet grip.

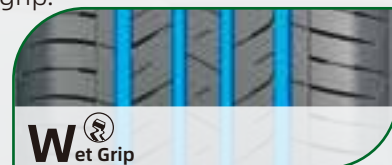


Design of matching depth of horizontal pattern groove and sipes groove

The rigidity design of each tread strip is effectively matched, and the form mileage of the tire is improved.



Optimized variable-pitches alignment

Silence pitches design, Computer-simulated tread pitches design reduces the striking noise with excellent quietness and comfortable ride.

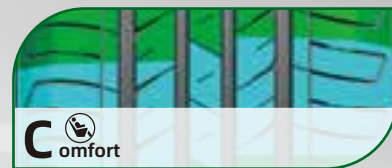

Silica tread compound design

New Silica tread compound improves grip on wet road and reduces rolling resistance, and therefore a safer ride and lower fuel consumption.


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
145/70R12	69T	4.50B	150	509	325	716	300/44	360 A A	BSW	✓	✓	✓
155/70R12	73T	4.50B	157	523	365	805	300/44	360 A A	BSW	✓	✓	✓
165/70R12	77T	5.00B	170	537	412	908	300/44	360 A A	BSW	✓	✓	✓
175/70R12	80T	5.00B	177	551	450	992	300/44	360 A A	BSW	✓	✓	✓
145/60R13	66T	4 1/2J	150	504	300	661	300/44	360 A A	BSW	✓	✓	✓
155/65R13	73T	4.50B	157	532	365	805	300/44	360 A A	BSW	✓	✓	✓
155/70R13	75T	4.50B	157	548	387	853	300/44	360 A A	BSW	✓	✓	✓
155/80R13	79T	4.50B	157	578	437	963	300/44	360 A A	BSW	✓	✓	✓
165/65R13	77T	5.00B	170	544	412	908	300/44	360 A A	BSW	✓	✓	✓
165/70R13	79T	5.00B	170	562	437	963	300/44	360 A A	BSW	✓	✓	✓
165/80R13	83T	4.50B	165	594	487	1074	300/44	360 A A	BSW	✓	✓	✓
175/60R13	77T	5.00B	177	540	412	908	300/44	360 A A	BSW	✓	✓	✓
175/70R13	82T	5.00B	177	576	475	1047	300/44	360 A A	BSW	✓	✓	✓
185/70R13	86T	5.50B	189	590	530	1168	300/44	360 A A	BSW	✓	✓	✓
155/50R14	67H	5J	162	512	307	677	300/44	360 A A	BSW	✓	✓	✓
155/65R14	75T	4 1/2J	157	558	387	853	300/44	360 A A	BSW	✓	✓	✓
165/55R14	72H	5J	170	538	355	783	300/44	360 A A	BSW	✓	✓	✓
165/60R14	75H	5J	170	554	387	853	300/44	360 A A	BSW	✓	✓	✓
165/65R14	79T	5J	170	570	437	963	300/44	360 A A	BSW	✓	✓	✓
165/70R14	81T	5J	170	588	462	1019	300/44	360 A A	BSW	✓	✓	✓
175/60R14	79H	5J	177	566	437	963	300/44	360 A A	BSW	✓	✓	✓
175/65R14	82T	5J	177	584	475	1047	300/44	360 A A	BSW	✓	✓	✓
175/70R14	84T	5J	177	602	500	1102	300/44	360 A A	BSW	✓	✓	✓
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	360 A A	BSW	✓	✓	✓
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	360 A A	BSW	✓	✓	✓
185/70R14	88T	5 1/2J	189	616	560	1235	300/44	360 A A	BSW	✓	✓	✓
195/60R14	86H	6J	201	590	530	1168	300/44	360 A A	BSW	✓	✓	✓
195/70R14	91T	6J	201	630	615	1356	300/44	360 A A	BSW	✓	✓	✓
205/60R14	88H	6J	209	602	560	1235	300/44	360 A A	BSW	✓	✓	✓
205/70R14	95T	6J	209	644	690	1521	300/44	360 A A	BSW	✓	✓	✓
155/60R15	74T	4 1/2J	157	567	375	827	300/44	360 A A	BSW	✓	✓	✓
165/50R15	73V	5J	170	547	365	805	300/44	360 A A	BSW	✓	✓	✓
165/55R15	75V	5J	170	563	387	853	300/44	360 A A	BSW	✓	✓	✓
165/60R15	81H XL	5J	170	579	462	1019	340/50	360 A A	BSW	✓	✓	✓
175/50R15	75H	5 1/2J	182	557	387	853	300/44	360 A A	BSW	✓	✓	✓
175/55R15	77V	5 1/2J	182	573	412	908	300/44	360 A A	BSW	✓	✓	✓
175/60R15	81H	5J	177	591	462	1019	300/44	360 A A	BSW	✓	✓	✓
175/65R15	84H	5J	177	609	500	1102	300/44	360 A A	BSW	✓	✓	✓
185/45R15	75T	6J	183	547	387	853	300/44	360 A A	BSW	✓	✓	✓
185/55R15	82V	6J	194	585	475	1047	300/44	360 A A	BSW	✓	✓	✓
185/60R15	88H XL	5 1/2J	189	603	560	1235	340/50	360 A A	BSW	✓	✓	✓
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	360 A A	BSW	✓	✓	✓
195/50R15	82V	6J	201	577	475	1047	300/44	360 A A	BSW	✓	✓	✓
195/55R15	85V	6J	201	595	515	1135	300/44	360 A A	BSW	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	360 A A	BSW	✓	✓	✓
195/65R15	95H XL	6J	201	635	690	1521	340/50	360 A A	BSW	✓	✓	✓
205/60R15	91V	6J	209	627	615	1356	300/44	360 A A	BSW	✓	✓	✓
205/65R15	94V	6J	209	647	670	1477	300/44	360 A A	BSW	✓	✓	✓
205/70R15	96T	6J	209	669	710	1565	300/44	360 A A	BSW	✓	✓	✓
215/65R15	96H	6 1/2J	221	661	710	1565	300/44	360 A A	BSW	✓	✓	✓
215/70R15	98T	6 1/2J	221	683	750	1653	300/44	360 A A	BSW	✓	✓	✓
225/60R15	96H	6 1/2J	228	651	710	1565	300/44	360 A A	BSW	✓	✓	✓
225/70R15	100T	6 1/2J	228	697	800	1764	300/44	360 A A	BSW	✓	✓	✓
185/55R16	83V	6J	194	610	487	1074	300/44	360 A A	BSW	✓	✓	✓
195/50R16	84V	6J	201	602	500	1102	300/44	360 A A	BSW	✓	✓	✓
195/55R16	87V	6J	201	620	545	1202	300/44	360 A A	BSW	✓	✓	✓
195/60R16	89H	6J	201	640	580	1279	300/44	360 A A	BSW	✓	✓	✓
205/55R16	91V	6 1/2J	214	632	615	1356	300/44	360 A A	BSW	✓	✓	✓
205/60R16	92V	6J	209	652	630	1389	300/44	360 A A	BSW	✓	✓	✓
205/65R16	95H	6J	209	672	690	1521	300/44	360 A A	BSW	✓	✓	✓
215/60R16	99H XL	6 1/2J	221	664	775	1709	340/50	360 A A	BSW	✓	✓	✓
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	360 A A	BSW	✓	✓	✓
225/60R16	98H	6 1/2J	228	676	750	1653	300/44	360 A A	BSW	✓	✓	✓
235/60R16	100H	7J	240	688	800	1764	300/44	360 A A	BSW	✓	✓	✓

COLO H01




Silicon-containing tread compound

New Silicon-containing tread compound improves grip on wet road and reduce rolling resistance, provide a safe ride and reduce fuel consumption.

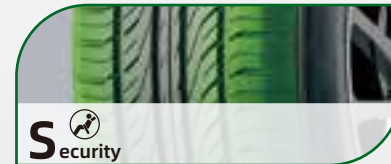


"Skiving" pattern

"Skiving" pattern design. Stereoscopic straight line "Skiving" pattern design absorb shakes from road, and provide a more comfortable driving.

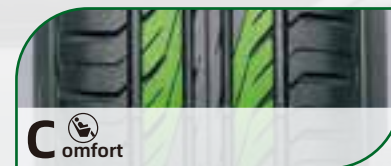


Silence design

Silence pitches design. Computer-simulated tread pitches design reduces the driving resonance with excellent quietness and comfortable ride.

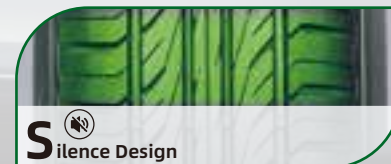

Big block pattern

Big block pattern in the outside. Big block in the outside ensure the great rigidity, handling and sport performance.

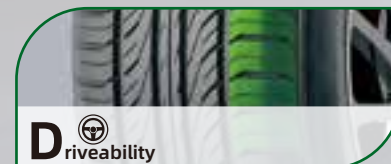

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
NEW 145/70R12	69T	4.50B	150	509	325	716	300/44	420/A/A	BSW	✓	✓	✓
NEW 145/80R12	74T	4.00B	145	537	375	827	300/44	420/A/A	BSW	✓	✓	✓
155/70R12	73T	4.50B	157	523	365	805	300/44	420/A/A	BSW	✓	✓	✓
165/70R12	77T	5.00B	170	537	412	908	300/44	420/A/A	BSW	✓	✓	✓
175/70R12	80T	5.00B	177	551	450	992	300/44	420/A/A	BSW	✓	✓	✓
145/70R13	71T	4.50B	150	534	345	761	300/44	420/A/A	BSW	✓	✓	✓
145/80R13	75T	4.00B	145	562	387	853	300/44	420/A/A	BSW	✓	✓	✓
155/65R13	73T	4.50B	157	532	365	805	300/44	420/A/A	BSW	✓	✓	✓
155/70R13	75T	4.50B	157	548	387	853	300/44	420/A/A	BSW	✓	✓	✓
155/80R13	79T	4.50B	157	578	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/65R13	77T	5.00B	170	544	412	908	300/44	420/A/A	BSW	✓	✓	✓
165/80R13	83T	4.50B	165	594	487	1074	300/44	420/A/A	BSW	✓	✓	✓
165/70R13	79T	5.00B	170	562	437	963	300/44	420/A/A	BSW	✓	✓	✓
175/60R13	77T	5.00B	177	540	412	908	300/44	420/A/A	BSW	✓	✓	✓
175/65R13	80T	5.00B	177	558	450	992	300/44	420/A/A	BSW	✓	✓	✓
175/70R13	82T	5.00B	177	576	475	1047	300/44	420/A/A	BSW	✓	✓	✓
185/60R13	80H	5.50B	189	552	450	992	300/44	420/A/A	BSW	✓	✓	✓
185/70R13	86T	5.50B	189	590	530	1168	300/44	420/A/A	BSW	✓	✓	✓
NEW 155/60R14	72H	4 1/2J	157	542	355	783	300/44	420/A/A	BSW	✓	✓	✓
155/65R14	75T	4 1/2J	157	558	387	853	300/44	420/A/A	BSW	✓	✓	✓
155/70R14	77T	4 1/2J	157	574	412	908	300/44	420/A/A	BSW	✓	✓	✓
NEW 165/55R14	72V	5J	170	538	355	783	300/44	420/A/A	BSW	✓	✓	✓
165/60R14	75H	5J	170	554	387	853	300/44	420/A/A	BSW	✓	✓	✓
165/65R14	79T	5J	170	570	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/70R14	81T	5J	170	588	462	1019	300/44	420/A/A	BSW	✓	✓	✓
175/60R14	79H	5.00B	177	566	437	963	300/44	420/A/A	BSW	✓	✓	✓
175/65R14	82T	5J	177	584	475	1047	300/44	420/A/A	BSW	✓	✓	✓
175/65R14	82H	5J	177	584	475	1047	300/44	420/A/A	BSW	✓	✓	✓
175/65R14	86T	5J	177	584	530	1168	340/50	420/A/A	BSW	✓	✓	✓
175/70R14	84T	5J	177	602	500	1102	300/44	420/A/A	BSW	✓	✓	✓
185/55R14	80H	6J	194	560	450	992	300/44	420/A/A	BSW	✓	✓	✓
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	420/A/A	BSW	✓	✓	✓
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	420/A/A	BSW	✓	✓	✓
185/70R14	88H	5 1/2J	189	616	560	1235	300/44	420/A/A	BSW	✓	✓	✓
195/60R14	86H	6J	201	590	530	1168	300/44	420/A/A	BSW	✓	✓	✓
195/65R14	89H	6J	201	610	580	1278	300/44	420/A/A	BSW	✓	✓	✓
195/70R14	91H	6J	201	630	615	1355	300/44	420/A/A	BSW	✓	✓	✓
205/60R14	88H	6J	209	602	560	1234	300/44	420/A/A	BSW	✓	✓	✓
205/70R14	95H	6J	209	644	690	1521	300/44	420/A/A	BSW	✓	✓	✓
215/70R14	96H	6 1/2J	221	658	710	1565	300/44	420/A/A	BSW	✓	✓	✓
145/65R15	72T	4 1/2J	150	569	355	783	300/44	420/A/A	BSW	✓	✓	✓
165/50R15	73V	5J	170	547	365	805	300/44	420/A/A	BSW	✓	✓	✓
165/55R15	75V	5J	170	563	387	853	300/44	420/A/A	BSW	✓	✓	✓
165/60R15	81H XL	5J	170	579	462	1019	340/50	420/A/A	BSW	✓	✓	✓
165/65R15	81T	5J	170	595	462	1019	300/44	420/A/A	BSW	✓	✓	✓
175/50R15	75H	5 1/2J	182	557	387	853	300/44	420/A/A	BSW	✓	✓	✓
175/55R15	77V	5 1/2J	182	573	412	908	300/44	420/A/A	BSW	✓	✓	✓
175/60R15	81H	5J	177	591	462	1019	300/44	420/A/A	BSW	✓	✓	✓
175/65R15	84H	5J	177	609	500	1102	300/44	420/A/A	BSW	✓	✓	✓
185/55R15	82V	6J	194	585	475	1047	300/44	420/A/A	BSW	✓	✓	✓
185/60R15	88H XL	5 1/2J	189	603	560	1235	340/50	420/A/A	BSW	✓	✓	✓
185/65R15	88H	5.5J	189	621	560	1235	300/44	420/A/A	BSW	✓	✓	✓
195/50R15	82V	6J	201	577	475	1047	300/44	420/A/A	BSW	✓	✓	✓
195/55R15	85V	6J	201	595	515	1135	300/44	420/A/A	BSW	✓	✓	✓
195/60R15	88V	6J	201	615	560	1235	300/44	420/A/A	BSW	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	420/A/A	BSW	✓	✓	✓
195/65R15	91H	6J	201	635	615	1356	300/44	420/A/A	BSW	✓	✓	✓
195/65R15	91V	6J	201	635	615	1356	300/44	420/A/A	BSW	✓	✓	✓
205/50R15	86V	6 1/2J	214	587	530	1168	300/44	420/A/A	BSW	✓	✓	✓
205/55R15	88V	6 1/2J	214	607	560	1235	300/44	420/A/A	BSW	✓	✓	✓
205/60R15	91V	6J	209	627	615	1355	300/44	420/A/A	BSW	✓	✓	✓
205/65R15	94V	6J	209	647	670	1477	300/44	420/A/A	BSW	✓	✓	✓
205/65R15	94H	6J	209	647	670	1477	300/44	420/A/A	BSW	✓	✓	✓
205/70R15	96H	6J	209	669	710	1565	300/44	420/A/A	BSW	✓	✓	✓
205/75R15	97T	5 1/2J	203	689	730	1609	300/44	420/A/A	BSW	✓	✓	✓
215/60R15	94H	6 1/2J	221	639	670	1477	300/44	420/A/A	BSW	✓	✓	✓
215/65R15	96H	6 1/2J	221	661	710	1565	300/44	420/A/A	BSW	✓	✓	✓
215/70R15	98H	6 1/2J	221	683	750	1653	300/44	420/A/A	BSW	✓	✓	✓
225/60R15	96V	6 1/2J	228	651	710	1565	300/44	420/A/A	BSW	✓	✓	✓
225/70R15	100H	6 1/2J	228	697	800	1764	300/44	420/A/A	BSW	✓	✓	✓
175/50R16	77V	5 1/2J	182	582	412	908	300/44	420/A/A	BSW	✓	✓	✓
185/50R16	81V	6J	194	592	462	1019	300/44	420/A/A	BSW	✓	✓	✓
185/55R16	83V	6J	194	610	487	1074	300/44	420/A/A	BSW	✓	✓	✓
185/60R16	86H	5 1/2J	189	628	530	1168	300/44	420/A/A	BSW	✓	✓	✓
195/50R16	84V	6J	201	602	500	1102	300/44	420/A/A	BSW	✓	✓	✓
195/55R16	87V	6J	201	620	545	1201	300/44	420/A/A	BSW	✓	✓	✓
195/60R16	89H	6J	201	640	580	1278	300/44	420/A/A	BSW	✓	✓	✓
205/55R16	91V	6.5J	214	632	615	1356	300/44	420/A/A	BSW	✓	✓	✓
205/60R16	92V	6J	209	652	630	1389	300/44	420/A/A	BSW	✓	✓	✓
205/65R16	95H	6J	209	672	690	1521	300/44	420/A/A	BSW	✓	✓	✓
205/80R16	104S XL	5 1/2J	203	734	900	1984	340/50	420/A/A	BSW	✓	✓	✓
215/55R16	93V	7J	226	642	650	1432	300/44	420/A/A	BSW	✓	✓	✓
215/60R16	99H XL	6 1/2J	221	664	775	1709	340/50	420/A/A	BSW	✓	✓	✓
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	420/A/A	BSW	✓	✓	✓
225/55R16	95V	7J	233	654	690	1521	300/44	420/A/A	BSW	✓	✓	✓
225/60R16	98H	6.5J	228	676	750	1653	300/44	420/A/A	BSW	✓	✓	✓
225/60R16	98V	6.5J	228	676	750	1653	300/44	420/A/A	BSW	✓	✓	✓
225/65R16	100T	6 1/2J	228	698	800	1764	300/44	420/A/A	BSW	✓	✓	✓
235/60R16	100H	7J	240	688	800	1763	300/44	420/A/A	BSW	✓	✓	✓
235/65R16	103T	7J	240	712	875	1929	300/44	420/A/A	BSW	✓	✓	✓
215/55R17	94V	7J	226	668	670	1477	300/44	420/A/A	BSW	✓	✓	✓
215/60R17	96T	6 1/2J	221	690	710	1565	300/44	420/A/A	BSW	✓	✓	✓
215/65R17	99T	6 1/2J	221	712	775	1709	300/44	420/A/A	BSW	✓	✓	✓
225/55R17	101H	7J	233	680	825	1818	340/50	420/A/A	BSW	✓	✓	✓
225/60R17	99H	6 1/2J	228	702	775	1708	300/44	420/A/A	BSW	✓	✓	✓
225/65R17	102H	6 1/2J	228	724	850	1873	300/44	420/A/A	BSW	✓	✓	✓
235/65R17	104H	7J	240	738	900	1984	300/44	420/A/A	BSW	✓	✓	✓

L-GRIP16



Shark fin design

Shark fin design, remain rigidity of the tread while improving drainage performance, reducing noise and ensuring the uniformity of the tire.



Low-noise grooves

Equal sipes within grooves. The 6 horizontal equal sipes within grooves effectively eliminate the bump noise, improve the rigidity between tread blocks, and possess a good stone removing and self-cleaning effect.




Enhanced tread

Enhanced tread design. Small knurl pattern on the top of the tread effectively reduce the noise between new tire and the whole car during run-in period, and improve handling and safety performance.



Anti-slip grooves

Four wide vertical drainage grooves. Four wide vertical drainage grooves provide great wetland grip ability, preventing lateral slip on wetland.

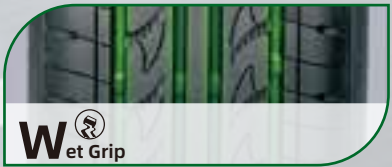

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
145/70R12	69T	4.50B	150	509	325	716	300/44	420/A/A	BSW	✓	✓	✓
155/65R13	73T	4.50B	157	532	365	805	300/44	420/A/A	BSW	✓	✓	✓
155/70R13	75T	4.50B	157	548	387	853	300/44	420/A/A	BSW	✓	✓	✓
155/80R13	79T	4.50B	157	578	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/65R13	77T	5.00B	170	544	412	908	300/44	420/A/A	BSW	✓	✓	✓
165/70R13	79H	5.00B	170	562	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/70R13	79T	5.00B	170	562	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/80R13	83T	4.50B	165	594	487	1074	300/44	420/A/A	BSW	✓	✓	✓
175/60R13	77T	5.00B	177	540	412	908	300/44	420/A/A	BSW	✓	✓	✓
175/70R13	82T	5.00B	177	576	475	1047	300/44	420/A/A	BSW	✓	✓	✓
175/75R13	84T	5.00B	177	594	500	1102	300/44	420/A/A	BSW	✓	✓	✓
185/70R13	86T	5.50B	189	590	530	1168	300/44	420/A/A	BSW	✓	✓	✓
155/65R14	75T	4 1/2J	157	558	387	853	300/44	420/A/A	BSW	✓	✓	✓
165/60R14	75H	5J	170	554	387	853	300/44	420/A/A	BSW	✓	✓	✓
165/65R14	79T	5J	170	570	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/65R14	79H	5J	170	570	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/70R14	81T	5J	170	588	462	1019	300/44	420/A/A	BSW	✓	✓	✓
175/60R14	79H	5J	177	566	437	963	300/44	420/A/A	BSW	✓	✓	✓
175/65R14	82T	5J	177	584	475	1047	300/44	420/A/A	BSW	✓	✓	✓
175/65R14	86T	5J	177	584	530	1168	340/50	420/A/A	BSW	✓	✓	✓
175/70R14	88T	5J	177	602	560	1235	340/50	420/A/A	BSW	✓	✓	✓
175/70R14	84T	5J	177	602	500	1102	300/44	420/A/A	BSW	✓	✓	✓
175/75R14	86T	5J	177	618	530	1168	300/44	420/A/A	BSW	✓	✓	✓
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	420/A/A	BSW	✓	✓	✓
185/65R14	86T	5 1/2J	189	596	530	1168	300/44	420/A/A	BSW	✓	✓	✓
185/70R14	88T	5 1/2J	189	616	560	1235	300/44	420/A/A	BSW	✓	✓	✓
195/60R14	86T	6J	201	590	530	1168	300/44	420/A/A	BSW	✓	✓	✓
195/70R14	91T	6J	201	630	615	1356	300/44	420/A/A	BSW	✓	✓	✓
205/60R14	88T	6J	209	602	560	1235	300/44	420/A/A	BSW	✓	✓	✓
205/70R14	98T	6J	209	644	750	1653	340/50	420/A/A	BSW	✓	✓	✓
205/70R15	96T	6J	209	669	710	1565	300/44	420/A/A	BSW	✓	✓	✓
205/70R15	100H	6J	209	669	800	1764	340/50	420/A/A	BSW	✓	✓	✓

L-COMFORT68




Streamlined grooves

Streamlined horizontal grooves design, improve smooth and high-speed ability, provide a low-noise and comfortable ride.




Shoulder design

Big block design on shoulder. Ultra-big block design on shoulder improve handling ability, open horizontal grooves provide great wetland drainage.

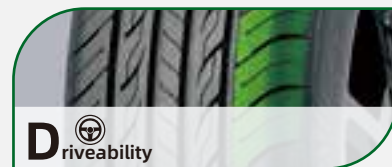


Louver design

Louver design on shoulder. Staged louvers on shoulder improve driving safety, semi through slips reduce noise.

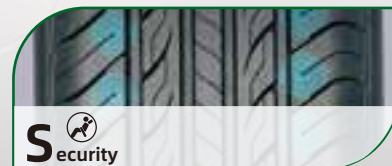

Anti-slip grooves

Four wide vertical drainage grooves provide great wetland grip ability, preventing lateral slip on wetland.

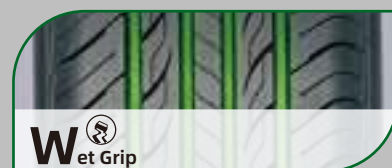


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
155/70R12	73T	4.5	157	523	365	805	300/44	380/A/A	BSW	-	-	-
175/65R14	82H	5J	177	584	475	1047	300/44	380/A/A	BSW	✓	✓	✓
185/55R14	80H	6J	194	560	450	992	300/44	380/A/A	BSW	✓	✓	✓
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	380/A/A	BSW	✓	✓	✓
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	380/A/A	BSW	✓	✓	✓
215/70R14	96H	6 1/2J	221	658	710	1565	300/44	380/A/A	BSW	✓	✓	✓
175/60R15	81H	5J	177	591	462	1019	300/44	380/A/A	BSW	✓	✓	✓
175/65R15	84H	5J	177	609	500	1102	300/44	380/A/A	BSW	✓	✓	✓
185/55R15	82V	6J	194	585	475	1047	300/44	380/A/A	BSW	✓	✓	✓
185/60R15	88H	5 1/2J	189	603	560	1235	340/50	380/A/A	BSW	✓	✓	✓
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	380/A/A	BSW	✓	✓	✓
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	380/A/A	BSW	✓	✓	✓
195/50R15	82V	6J	201	577	475	1047	300/44	380/A/A	BSW	✓	✓	✓
195/55R15	85V	6J	201	595	515	1135	300/44	380/A/A	BSW	✓	✓	✓
195/60R15	88V	6J	201	615	560	1235	300/44	380/A/A	BSW	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	380/A/A	BSW	✓	✓	✓
195/65R15	91V	6J	201	635	615	1356	300/44	380/A/A	BSW	✓	✓	✓
195/65R15	95H	6J	201	635	690	1521	340/50	380/A/A	BSW	✓	✓	✓
195/65R15	91H	6J	201	635	615	1356	300/44	380/A/A	BSW	✓	✓	✓
205/60R15	91H	6J	209	627	615	1356	300/44	380/A/A	BSW	✓	✓	✓
205/60R15	91V	6J	209	627	615	1356	300/44	380/A/A	BSW	✓	✓	✓
205/65R15	94V	6J	209	647	670	1477	300/44	380/A/A	BSW	✓	✓	✓
205/65R15	94H	6J	209	647	670	1477	300/44	380/A/A	BSW	✓	✓	✓
215/65R15	100H	6 1/2J	221	661	800	1764	340/50	380/A/A	BSW	✓	✓	✓
215/70R15	98T	6 1/2J	221	683	750	1653	300/44	380/A/B	BSW	✓	✓	✓
235/70R15	103T	7J	240	711	875	1929	300/44	380/A/B	BSW	✓	✓	✓
185/50R16	81V	6J	194	592	462	1018	300/44	380/A/A	BSW	✓	✓	✓
185/55R16	83V	6J	194	610	487	1074	300/44	380/A/A	BSW	✓	✓	✓
195/55R16	87V	6J	201	620	545	1201	300/44	380/A/A	BSW	✓	✓	✓
195/55R16	91W	6J	201	620	615	1356	340/50	380/A/A	BSW	✓	✓	✓
195/60R16	89H	6J	201	640	580	1279	300/44	380/A/A	BSW	✓	✓	✓
205/55R16	91V	6 1/2J	214	632	615	1356	300/44	380/A/A	BSW	✓	✓	✓
205/60R16	92V	6J	209	652	630	1389	300/44	380/A/A	BSW	✓	✓	✓
205/65R16	95T	6J	209	672	690	1521	300/44	380/A/B	BSW	✓	✓	✓
215/60R16	95V	6 1/2J	221	664	690	1521	300/44	380/A/A	BSW	✓	✓	✓
215/60R16	99V	6 1/2J	221	664	775	1709	340/50	380/A/A	BSW	✓	✓	✓
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	380/A/A	BSW	✓	✓	✓
225/60R16	98V	6 1/2J	228	676	750	1653	300/44	380/A/A	BSW	✓	✓	✓
225/65R16	100T	6 1/2J	228	698	800	1764	300/44	380/A/B	BSW	✓	✓	✓
235/60R16	100H	7J	240	688	800	1764	300/44	380/A/A	BSW	✓	✓	✓
235/65R16	103T	7J	240	712	875	1930	300/44	380/A/B	BSW	✓	✓	✓
215/60R17	96T	6 1/2J	221	690	710	1565	300/44	380/A/B	BSW	✓	✓	✓
215/65R17	99T	6 1/2J	221	712	775	1709	300/44	380/A/B	BSW	✓	✓	✓
225/60R17	99H	6 1/2J	228	702	775	1709	300/44	380/A/B	BSW	✓	✓	✓
225/65R17	102H	6 1/2J	228	724	850	1874	300/44	380/A/A	BSW	✓	✓	✓
235/65R17	104H	7J	240	738	900	1984	300/44	380/A/A	BSW	✓	✓	✓


NEW

Asymmetrical pattern design, balanced and optimized pattern groove design


This design full of personality can improve excellent handling performance and give people an extraordinary double-sided charm visual experience. And also effectively reduce noise and improve tire comfort.

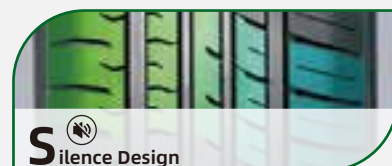**Wide longitudinal groove design**


The wide longitudinal grooves can drain water quickly, effectively avoiding tire slipping on wet roads and improving wet handling.

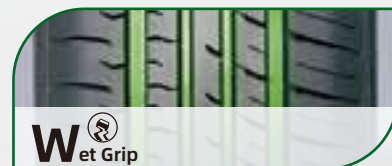**Break through the traditional design of the lateral groove on the inner shoulder**

It can reduce the rigidity of the tire shoulders, effectively suppress eccentric wear, block the transmission of noise from the central block, reduce tire noise, and bring excellent driving comfort.

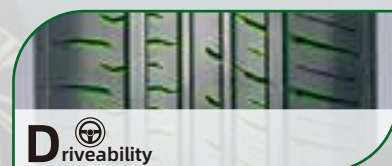**Special hook groove design on outer shoulder**

It can effectively reduce heat generation at the shoulder, reduce resonance during driving, and effectively reduce tire noise.

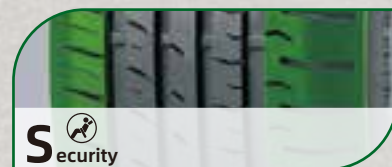

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
155/65R13	73T	4.50B	157	532	365	805	300/44	400/A/A	BSW	✓	✓	✓
155/70R13	75T	4.50B	157	548	387	853	300/44	400/A/A	BSW	✓	✓	✓
155/80R13	79T	4.50B	157	578	437	963	300/44	400/A/A	BSW	✓	✓	✓
165/65R13	77T	5.00B	170	544	412	908	300/44	400/A/A	BSW	✓	✓	✓
175/70R13	82T	5.00B	177	576	475	1047	300/44	400/A/A	BSW	✓	✓	✓
155/65R14	75T	4.50B	157	558	387	853	300/44	400/A/A	BSW	✓	✓	✓
165/60R14	75H	5.00B	170	554	387	853	300/44	400/A/A	BSW	✓	✓	✓
165/70R14	85T XL	5.00B	170	588	515	1135	340/50	400/A/A	BSW	✓	✓	✓
165/70R14	81T	5.00B	170	588	462	1019	300/44	400/A/A	BSW	✓	✓	✓
175/60R14	79H	5.00B	177	566	437	963	300/44	400/A/A	BSW	✓	✓	✓
175/65R14	86T XL	5.00B	177	584	530	1168	340/50	400/A/A	BSW	✓	✓	✓
175/65R14	82H	5.00B	177	584	475	1047	300/44	400/A/A	BSW	✓	✓	✓
175/70R14	88T XL	5.00B	177	602	560	1235	340/50	400/A/A	BSW	✓	✓	✓
175/70R14	84T	5.00B	177	602	500	1102	300/44	400/A/A	BSW	✓	✓	✓
185/50R14	77V	6J	194	542	412	908	300/44	400/A/A	BSW	✓	✓	✓
185/55R14	80H	6J	194	560	450	992	300/44	400/A/A	BSW	✓	✓	✓
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	400/A/A	BSW	✓	✓	✓
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	400/A/A	BSW	✓	✓	✓
185/70R14	88T	5 1/2J	189	616	560	1235	300/44	400/A/A	BSW	✓	✓	✓
195/65R14	89H	6J	201	610	580	1279	300/44	400/A/A	BSW	✓	✓	✓
155/60R15	74T	4.50B	157	567	375	827	300/44	400/A/A	BSW	✓	✓	✓
165/60R15	81HXL	5.00B	170	579	462	1019	340/50	400/A/A	BSW	✓	✓	✓
165/65R15	81H	5J	170	595	462	1019	300/44	400/A/A	BSW	✓	✓	✓
175/55R15	77H	5 1/2J	182	573	412	908	300/44	400/A/A	BSW	✓	✓	✓
175/60R15	81H	5J	177	591	462	1019	300/44	400/A/A	BSW	✓	✓	✓
175/65R15	84H	5J	177	609	500	1102	300/44	400/A/A	BSW	✓	✓	✓
185/55R15	82V	6J	194	585	475	1047	300/44	400/A/A	BSW	✓	✓	✓
185/60R15	88H XL	5 1/2J	189	603	560	1235	340/50	400/A/A	BSW	✓	✓	✓
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	400/A/A	BSW	✓	✓	✓
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	400/A/A	BSW	✓	✓	✓
195/50R15	82V	6J	201	577	475	1047	300/44	400/A/A	BSW	✓	✓	✓
195/55R15	85V	6J	201	595	515	1135	300/44	400/A/A	BSW	✓	✓	✓
195/60R15	88V	6J	201	615	560	1235	300/44	400/A/A	BSW	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	400/A/A	BSW	✓	✓	✓
195/65R15	95TXL	6J	201	635	690	1521	340/50	400/A/A	BSW	✓	✓	✓
195/65R15	91V	6J	201	635	615	1356	300/44	400/A/A	BSW	✓	✓	✓
205/60R15	91V	6J	209	627	615	1356	300/44	400/A/A	BSW	✓	✓	✓
205/65R15	94V	6J	209	647	670	1477	300/44	400/A/A	BSW	✓	✓	✓
215/65R15	96H	6 1/2J	221	661	710	1565	300/44	400/A/A	BSW	✓	✓	✓
175/50R16	77V	5 1/2J	182	582	412	908	300/44	400/A/A	BSW	✓	✓	✓
185/50R16	81V	6J	194	592	462	1019	300/44	400/A/A	BSW	✓	✓	✓
185/55R16	87V XL	6J	194	610	545	1202	340/50	400/A/A	BSW	✓	✓	✓
195/50R16	88V XL	6J	201	602	560	1235	340/50	400/A/A	BSW	✓	✓	✓
195/55R16	91V XL	6J	201	620	615	1356	340/50	400/A/A	BSW	✓	✓	✓
205/50R16	91W XL	6 1/2J	214	612	615	1356	340/50	400/A/A	BSW	✓	✓	✓
205/55R16	94W XL	6 1/2J	214	632	670	1477	340/50	400/A/A	BSW	✓	✓	✓
205/55R16	91V	6 1/2J	214	632	615	1356	300/44	400/A/A	BSW	✓	✓	✓
205/60R16	96V XL	6J	209	652	710	1565	340/50	400/A/A	BSW	✓	✓	✓
205/60R16	92V	6J	209	652	630	1389	300/44	400/A/A	BSW	✓	✓	✓
215/55R16	97W XL	7J	226	642	730	1609	340/50	400/A/A	BSW	✓	✓	✓
215/60R16	99H XL	6 1/2J	221	664	775	1709	340/50	400/A/A	BSW	✓	✓	✓
215/60R16	95V	6 1/2J	221	664	690	1521	300/44	400/A/A	BSW	✓	✓	✓
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	400/A/A	BSW	✓	✓	✓
225/55R16	99W XL	7J	233	654	775	1709	340/50	400/A/A	BSW	✓	✓	✓
225/60R16	102VXL	6 1/2J	228	676	850	1874	340/50	400/A/A	BSW	✓	✓	✓


ESTRELLA 88



NEW


Narrow longitudinal groove with large pattern block on the outside design

Improve the vehicle's cornering grip and ensure the vehicle's handling performance.

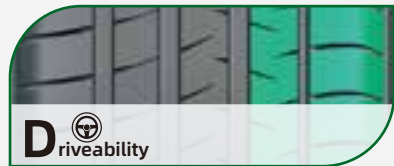


Wide longitudinal grooves design

Effectively reduce the hydroplaning problem of tires and improve the wet grip.

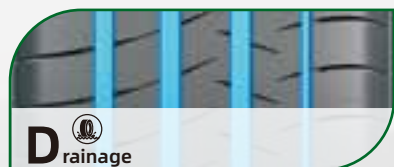

Design of diagonal groove for inner streamline

The drainage performance of the tire is improved, and the wet grip is improved.

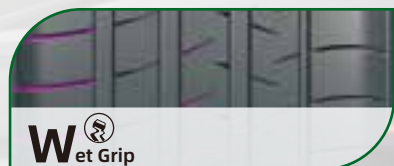

Silica tread compound design

New Silica tread compound improves grip on wet road and reduces rolling resistance, and therefore a safer ride and lower fuel consumption.

Optimized variable-pitches alignment

Silence pitches design, Computer-simulated tread pitches design reduces the striking noise with excellent quietness and comfortable ride.

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
195/45R16	84V XL	6 1/2J	195	582	500	1102	340/50	360/A/A	BSW	✓	✓	✓
205/45ZR16	87W XL	7J	206	590	545	1202	340/50	360/A/A	BSW	✓	✓	✓
205/50ZR16	91W XL	6 1/2J	214	612	615	1356	340/50	360/A/A	BSW	✓	✓	✓
215/45ZR16	90W XL	7J	213	600	600	1323	340/50	360/A/A	BSW	✓	✓	✓
215/55ZR16	97W XL	7J	226	642	730	1609	340/50	360/A/A	BSW	✓	✓	✓
225/55ZR16	99W XL	7J	233	654	775	1709	340/50	360/A/A	BSW	✓	✓	✓
195/40ZR17	81W XL	7J	200	588	462	1019	340/50	360/A/A	BSW	✓	✓	✓
195/45ZR17	85W XL	6 1/2J	195	608	515	1135	340/50	360/A/A	BSW	✓	✓	✓
205/40ZR17	84W XL	7 1/2J	212	596	500	1102	340/50	360/A/A	BSW	✓	✓	✓
205/45ZR17	88W XL	7J	206	616	560	1235	340/50	360/A/A	BSW	✓	✓	✓
205/50ZR17	93W XL	6 1/2J	214	638	650	1433	340/50	360/A/A	BSW	✓	✓	✓
205/55ZR17	95W XL	6 1/2J	214	658	690	1521	340/50	360/A/A	BSW	✓	✓	✓
215/40ZR17	87W XL	7 1/2J	218	604	545	1202	340/50	360/A/A	BSW	✓	✓	✓
215/45ZR17	91W XL	7J	213	626	615	1356	340/50	360/A/A	BSW	✓	✓	✓
215/50ZR17	95W XL	7J	226	648	690	1521	340/50	360/A/A	BSW	✓	✓	✓
215/55ZR17	98W XL	7J	226	668	750	1653	340/50	360/A/A	BSW	✓	✓	✓
225/45ZR17	94W XL	7 1/2J	225	634	670	1477	340/50	360/A/A	BSW	✓	✓	✓
225/50ZR17	98W XL	7J	233	658	750	1653	340/50	360/A/A	BSW	✓	✓	✓
225/55ZR17	101W XL	7J	233	680	825	1819	340/50	360/A/A	BSW	✓	✓	✓
235/45ZR17	97W XL	8J	236	644	730	1609	340/50	360/A/A	BSW	✓	✓	✓
235/50ZR17	100W XL	7 1/2J	245	668	800	1764	340/50	360/A/A	BSW	✓	✓	✓
235/55ZR17	103W XL	7 1/2J	245	690	875	1929	340/50	360/A/A	BSW	✓	✓	✓
245/40ZR17	95W XL	8 1/2J	248	628	690	1521	340/50	360/A/A	BSW	✓	✓	✓
245/45ZR17	99W XL	8J	243	652	775	1709	340/50	360/A/A	BSW	✓	✓	✓
255/45ZR17	102W XL	8 1/2J	255	662	850	1874	340/50	360/A/A	BSW	✓	✓	✓
215/35ZR18	84W XL	7 1/2J	218	607	500	1102	340/50	360/A/A	BSW	✓	✓	✓
215/40ZR18	89W XL	7 1/2J	218	629	580	1279	340/50	360/A/A	BSW	✓	✓	✓
215/45ZR18	93W XL	7J	213	651	650	1433	340/50	360/A/A	BSW	✓	✓	✓
215/50ZR18	92W	7J	226	673	630	1389	300/44	360/A/A	BSW	✓	✓	✓
215/55ZR18	99W XL	7J	226	693	775	1709	340/50	360/A/A	BSW	✓	✓	✓
225/40ZR18	92W XL	8J	230	637	630	1389	340/50	360/A/A	BSW	✓	✓	✓
225/45ZR18	95W XL	7 1/2J	225	659	690	1521	340/50	360/A/A	BSW	✓	✓	✓


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
225/50ZR18	99W XL	7J	233	683	775	1709	340/50	360/A/A	BSW	✓	✓	✓
225/55ZR18	102W XL	7J	233	705	850	1874	340/50	360/A/A	BSW	✓	✓	✓
235/40ZR18	95W XL	8 1/2J	241	645	690	1521	340/50	360/A/A	BSW	✓	✓	✓
235/45ZR18	98W XL	8J	236	669	750	1653	340/50	360/A/A	BSW	✓	✓	✓
235/50ZR18	97W	7 1/2J	245	693	730	1609	300/44	360/A/A	BSW	✓	✓	✓
235/55ZR18	104W XL	7 1/2J	245	715	900	1984	340/50	360/A/A	BSW	✓	✓	✓
245/40ZR18	97W XL	8 1/2J	248	653	730	1609	340/50	360/A/A	BSW	✓	✓	✓
245/45ZR18	100W XL	8J	243	677	800	1764	340/50	360/A/A	BSW	✓	✓	✓
255/35ZR18	94W XL	9J	260	635	670	1477	340/50	360/A/A	BSW	✓	✓	✓
255/40ZR18	99W XL	9J	260	661	775	1709	340/50	360/A/A	BSW	✓	✓	✓
255/45ZR18	103W XL	8 1/2J	255	687	875	1929	340/50	360/A/A	BSW	✓	✓	✓
255/55ZR18	109W XL	8J	265	737	1030	2271	340/50	360/A/A	BSW	✓	✓	✓
265/35ZR18	97W XL	9 1/2J	271	643	730	1609	340/50	360/A/A	BSW	✓	✓	✓
275/40ZR18	103W XL	9 1/2J	278	677	875	1929	340/50	360/A/A	BSW	✓	✓	✓
275/45ZR18	107W XL	9J	273	705	975	2149	340/50	360/A/A	BSW	✓	✓	✓
205/55ZR19	97W XL	6 1/2J	214	709	730	1609	340/50	360/A/A	BSW	✓	✓	✓
225/35ZR19	88Y XL	8J	230	641	560	1235	340/50	360/A/A	BSW	✓	✓	✓
225/40ZR19	93Y XL	8J	230	663	650	1433	340/50	360/A/A	BSW	✓	✓	✓
225/45ZR19	96Y XL	7 1/2J	225	685	710	1565	340/50	360/A/A	BSW	✓	✓	✓
225/55ZR19	99W	7J	233	731	775	1709	300/44	360/A/A	BSW	✓	✓	✓
235/35ZR19	91Y XL	8 1/2J	241	647	615	1356	340/50	360/A/A	BSW	✓	✓	✓
235/40ZR19	96Y XL	8 1/2J	241	671	710	1565	340/50	360/A/A	BSW	✓	✓	✓
235/45ZR19	99W XL	8J	236	695	775	1709	340/50	360/A/A	BSW	✓	✓	✓
235/50ZR19	103Y XL	7 1/2J	245	719	875	1929	340/50	360/A/A	BSW	✓	✓	✓
235/55ZR19	105W XL	7 1/2J	245	741	925	2039	340/50	360/A/A	BSW	✓	✓	✓
245/35ZR19	93Y XL	8 1/2J	248	655	650	1433	340/50	360/A/A	BSW	✓	✓	✓
245/40ZR19	98Y XL	8 1/2J	248	679	750	1653	340/50	360/A/A	BSW	✓	✓	✓
245/45ZR19	102Y XL	8J	243	703	850	1874	340/50	360/A/A	BSW	✓	✓	✓
245/55ZR19	107W XL	7 1/2J	253	753	975	2149	340/50	360/A/A	BSW	✓	✓	✓
255/35ZR19	96Y XL	9J	260	661	710	1565	340/50	360/A/A	BSW	✓	✓	✓
255/40ZR19	100Y XL	9J	260	687	800	1764	340/50	360/A/A	BSW	✓	✓	✓
255/45ZR19	104W XL	8 1/2J	255	713	900	1984	340/50	360/A/A	BSW	✓	✓	✓
255/50ZR19	107W XL	8J	265	739	975	2149	340/50	360/A/A	BSW	✓	✓	✓
255/55ZR19	111W XL	8J	265	763	1090	2403	340/50	360/A/A	BSW	✓	✓	✓
265/30ZR19	93W XL	9 1/2J	271	643	650	1433	340/50	360/A/A	BSW	✓	✓	✓
265/35R19	98V XL	9 1/2J	271	669	750	1653	340/50	360/A/A	BSW	✓	✓	✓
275/30ZR19	96W XL	9 1/2J	278	649	710	1565	340/50	360/A/A	BSW	✓	✓	✓
295/30ZR19	100Y XL	10 1/2J	301	661	800	1764	340/50	360/A/A	BSW	✓	✓	✓
195/55R20	95V XL	6J	201	722	690	1521	340/50	360/A/A	BSW	✓	✓	✓
225/30ZR20	85W XL	8J	230	644	515	1135	340/50	360/A/A	BSW	✓	✓	✓
225/35ZR20	90W XL	8J	230	666	600	1323	340/50	360/A/A	BSW	✓	✓	✓
235/30ZR20	88Y XL	8 1/2J	241	650	560	1235	340/50	360/A/A	BSW	✓	✓	✓
235/35ZR20	92Y XL	8 1/2J	241	672	630	1389	340/50	360/A/A	BSW	✓	✓	✓
235/45ZR20	100W XL	8J	236	720	800	1764	340/50	360/A/A	BSW	✓	✓	✓
235/50ZR20	104W XL	7 1/2J	245	744	900	1984	340/50	360/A/A	BSW	✓	✓	✓
235/55ZR20	105W XL	7 1/2J	245	766	925	2039	340/50	360/A/A	BSW	✓	✓	✓
245/30ZR20	95W XL	8 1/2J	248	656	690	1521	340/50	360/A/A	BSW	✓	✓	✓
245/35ZR20	95W XL	8 1/2J	248	680	690	1521	340/50	360/A/A	BSW	✓	✓	✓
245/40ZR20	99Y XL	8 1/2J	248	704	775	1709	340/50	360/A/A	BSW	✓	✓	✓
245/45ZR20	103Y XL	8J	243	728	875	1929	340/50	360/A/A	BSW	✓	✓	✓
245/50ZR20	105Y XL	7 1/2J	253	754	925	2039	340/50	360/A/A	BSW	✓	✓	✓
255/30ZR20	92Y XL	9J	260	662	630	1389	340/50	360/A/A	BSW	✓	✓	✓
255/35ZR20	97W XL	9J	260	686	730	1609	340/50	360/A/A	BSW	✓	✓	✓
255/45ZR20	105W XL	8 1/2J	255	738	925	2039	340/50	360/A/A	BSW	✓	✓	✓
255/50ZR20	109Y XL	8J	265	764	1030	2271	340/50	360/A/A	BSW	✓	✓	✓
255/55ZR20	110W XL	8J	265	788	1060	2337	340/50	360/A/A	BSW	✓	✓	✓
265/40ZR20	104W XL	9 1/2J	271	720	900	1984	340/50	360/A/A	BSW	✓	✓	✓
265/45ZR20	108W XL	9J	266	746	1000	2205	340/50	360/A/A	BSW	✓	✓	✓
265/50ZR20	111Y XL	8 1/2J	277	774	1090	2403	340/50	360/A/A	BSW	✓	✓	✓
275/30ZR20	97Y XL	9 1/2J	278	674	730	1609	340/50	360/A/A	BSW	✓	✓	✓
275/35ZR20	102Y XL	9 1/2J	278	700	850	1874	340/50	360/A/A	BSW	✓	✓	✓
275/40ZR20	106W XL	9 1/2J	278	728								

L-ZEAL 56




Asymmetric tread pattern

Asymmetric tread pattern design with lateral grooves linked inside provide excellent drainage performance.

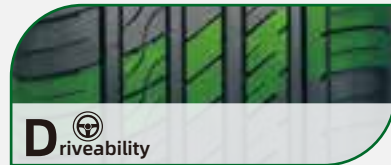

Wide and large shoulder

Wide and large shoulder blocks with sipes design ensure the blocks peristalsis slightly while turning and changing lanes, bring stable handling and great driving performance.

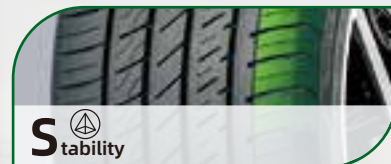

Linked pattern

Linked pattern design. Linked pattern design reduce the driving noise and provide great wetland grip performance.



Vertical ribs

Vertical ribs improve high-speed driving stability.

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
195/45R15	82VXL	6 1/2J	195	557	475	1047	340/50	300/A/A	BSW	✓	✓	✓
195/45R16	84W	6 1/2J	195	582	500	1102	340/50	300/A/A	BSW	✓	✓	✓
195/50R16	84V	6J	201	602	500	1102	300/44	300/A/A	BSW	✓	✓	✓
205/45R16	87W	7J	206	590	545	1201	340/50	300/A/A	BSW	✓	✓	✓
205/50R16	91W	6 1/2J	214	612	615	1356	340/50	300/A/A	BSW	✓	✓	✓
205/55R16	91W	6 1/2J	214	632	615	1356	300/44	300/A/A	BSW	✓	✓	✓
205/55R16	94W	6 1/2J	214	632	670	1477	340/50	300/A/A	BSW	✓	✓	✓
215/55R16	97W	7J	226	642	730	1609	340/50	300/A/A	BSW	✓	✓	✓
225/55R16	99W	7J	233	654	775	1709	340/50	300/A/A	BSW	✓	✓	✓
195/40R17	81W	7J	200	588	462	1019	340/50	300/A/A	BSW	✓	✓	✓
205/40R17	84W	7 1/2J	212	596	500	1102	340/50	300/A/A	BSW	✓	✓	✓
205/45R17	88W	7J	206	616	560	1235	340/50	300/A/A	BSW	✓	✓	✓
205/50R17	93W	6 1/2J	214	638	650	1433	340/50	300/A/A	BSW	✓	✓	✓
205/55R17	95WXL	6 1/2J	214	658	690	1521	340/50	300/A/A	BSW	✓	✓	✓
215/40R17	87W	7 1/2J	218	604	545	1202	340/50	300/A/A	BSW	✓	✓	✓
215/45R17	91W	7J	213	626	615	1356	340/50	300/A/A	BSW	✓	✓	✓
215/50R17	95W	7J	226	648	690	1521	340/50	300/A/A	BSW	✓	✓	✓
215/55R17	94W	7J	226	668	670	1477	300/44	300/A/A	BSW	✓	✓	✓
225/45R17	94W	7 1/2J	225	634	670	1477	340/50	300/A/A	BSW	✓	✓	✓
225/50R17	98W	7J	233	658	750	1653	340/50	300/A/A	BSW	✓	✓	✓
225/55R17	97V	7J	233	680	730	1609	300/44	300/A/A	BSW	✓	✓	✓
225/55R17	101W	7J	233	680	825	1819	340/50	300/A/A	BSW	✓	✓	✓

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
235/45R17	97W	8J	236	644	730	1609	340/50	300/A/A	BSW	✓	✓	✓
235/50R17	100WXL	7 1/2J	245	668	800	1764	340/50	300/A/A	BSW	✓	✓	✓
235/55R17	99V	7 1/2J	245	690	775	1709	300/44	300/A/A	BSW	✓	✓	✓
235/55R17	103W	7 1/2J	245	690	875	1929	340/50	300/A/A	BSW	✓	✓	✓
245/40R17	95W XL	8 1/2J	248	628	690	1521	340/50	300/A/A	BSW	✓	✓	✓
245/45R17	99W XL	8J	243	652	775	1709	340/50	300/A/A	BSW	✓	✓	✓
215/35R18	84W	7 1/2J	218	607	500	1102	340/50	300/A/A	BSW	✓	✓	✓
215/40R18	89W	7 1/2J	218	629	580	1279	340/50	300/A/A	BSW	✓	✓	✓
215/45R18	93W	7J	213	651	650	1433	340/50	300/A/A	BSW	✓	✓	✓
215/50ZR18	92W	7J	226	673	630	1389	300/44	300/A/A	BSW	✓	✓	✓
215/55R18	99W	7J	226	693	775	1709	340/50	300/A/A	BSW	✓	✓	✓
225/40R18	92W	8J	230	637	630	1389	340/50	300/A/A	BSW	✓	✓	✓
225/45R18	95W	7 1/2J	225	659	690	1521	340/50	300/A/A	BSW	✓	✓	✓
225/50ZR18	99WXL	7J	233	683	775	1709	340/50	300/A/A	BSW	✓	✓	✓
225/55R18	102W XL	7J	233	705	850	1874	340/50	300/A/A	BSW	✓	✓	✓
235/40R18	95W	8 1/2J	241	645	690	1521	340/50	300/A/A	BSW	✓	✓	✓
235/45R18	98W XL	8J	236	669	750	1653	340/50	300/A/A	BSW	✓	✓	✓
235/50R18	97V	7 1/2J	245	693	730	1609	300/44	300/A/A	BSW	✓	✓	✓
235/55R18	104V	7 1/2J	245	715	900	1984	340/50	300/A/A	BSW	✓	✓	✓
245/40R18	97W	8 1/2J	248	653	730	1609	340/50	300/A/A	BSW	✓	✓	✓
245/45R18	100W	8J	243	677	800	1764	340/50	300/A/A	BSW	✓	✓	✓
255/35ZR18	94W	9J	260	635	670	1477	340/50	300/A/A	BSW	✓	✓	✓
255/40ZR18	99WXL	9J	260	661	775	1709	340/50	300/A/A	BSW	✓	✓	✓
255/45R18	99W	8 1/2J	255	687	775	1709	300/44	300/A/A	BSW	✓	✓	✓
255/50R18	106VXL	8J	265	713	950	2094	340/50	300/A/A	BSW	✓	✓	✓
255/55R18	105V	8J	265	737	925	2039	300/44	300/A/A	BSW	✓	✓	✓
265/35ZR18	97W	9 1/2J	271	643	730	1609	340/50	300/A/A	BSW	✓	✓	✓
265/40ZR18	101WXL	9 1/2J	271	669	825	1819	340/50	300/A/A	BSW	✓	✓	✓
275/40ZR18	103WXL	9 1/2J	278	677	875	1929	340/50	300/A/A	BSW	✓	✓	✓
285/35ZR18	101W	10J	290	657	825	1819	340/50	300/A/A	BSW	✓	✓	✓
205/55R19	97VXL	6 1/2J	214	709	730	1609	340/50	300/A/A	BSW	✓	✓	✓
225/35R19	84W	8J	230	641	500	1102	300/44	300/A/A	BSW	✓	✓	✓
225/40ZR19	93WXL	8J	230	663	650	1433	340/50	300/A/A	BSW	✓	✓	✓
225/55R19	99V	7J	233	731	775	1709	300/44	300/A/A	BSW	✓	✓	✓
235/35R19	91W	8 1/2J	241	647	615	1356	340/50	300/A/A	BSW	✓	✓	✓
235/45R19	95W	8J	236	695	690	1521	300/44	300/A/A	BSW	✓	✓	✓
235/50R19	103V	7 1/2J	245	719	875	1929	340/50	300/A/A	BSW	✓	✓	✓
235/55R19	105V	7 1/2J	245	741	925	2039	340/50	300/A/A	BSW	✓	✓	✓
245/35R19	93W	8 1/2J	248	655	650	1433	340/50	300/A/A	BSW	✓	✓	✓
245/40ZR19	98WXL	8 1/2J	248	679	750	1653	340/50	300/A/A	BSW	✓	✓	✓
245/45R19	98W	8J	243	703	750	1653	300/44	300/A/A	BSW	✓	✓	✓
245/55R19	103V	7 1/2J	253	753	875	1929	300/44	300/A/A	BSW	✓	✓	✓
255/35R19	96W	9J	260	661	710	1565	340/50	300/A/A	BSW	✓	✓	✓
255/45R19	100W	8 1/2J	255	713	800	1764	300/44	300/A/A	BSW	✓	✓	✓
255/50R19	103V	8J	265	739	875	1929	300/44	300/A/A	BSW	✓	✓	✓
255/55R19	111VXL	8J	265	763	1090	2403	340/50	300/A/A	BSW	✓	✓	✓
265/30ZR19	93W	9 1/2J	271	643	650	1433	340/50	300/A/A	BSW	✓	✓	✓
265/50R19	110VXL	8 1/2J	277	749	1060	2337	340/50	300/A/A	BSW	✓	✓	✓
275/30ZR19	96W	9 1/2J	278	649	710	1565	340/50	300/A/A	BSW	✓	✓	✓
275/45R19	108VXL	9J	273	731	1000	2205	340/50	300/A/A	BSW	✓	✓	✓
275/55R19	111V	8 1/2J	284	785	1090	2403	300/44	300/A/A	BSW	✓	✓	✓
195/55R20	91V	6J	201	722	615	1356	300/44	300/A/A	BSW	✓	✓	✓
225/30ZR20	85W	8J	230	644	515	1135	340/50	300/A/A	BSW	✓	✓	✓
225/35R20	90W	8J	230	666	600	1323	340/50	300/A/A	BSW	✓	✓	✓
235/30ZR20	88WXL	8 1/2J	241	650	560	1235	340/50	300/A/A	BSW	✓	✓	✓
235/35R20	92W	8 1/2J	241	672	630	1389	340/50	300/A/A	BSW	✓	✓	✓
235/55ZR20	105WXL	7 1/2J	245	766	925	2039	340/50	300/A/A	BSW	✓	✓	✓
245/30ZR20	95WXL	8 1/2J	248	656	690	1521	340/50	300/A/A	BSW	✓	✓	✓
245/35R20	95W	8 1/2J	248	680	690	1521	340/50	300/A/A	BSW	✓	✓	✓
245/40ZR20	99W	8 1/2J	248	704	775	1709	340/50	300/A/A	BSW	✓	✓	✓
245/45ZR20	103WXL	8J	243	728	875	1929	340/50	300/A/A	BSW	✓	✓	✓
245/50ZR20	105WXL	7 1/2J	253	754	925	2039	340/50	300/A/A	BSW	✓	✓	✓
255/30ZR20	92YXL	9J	260	662	630	1389	340/50	300/A/A	BSW	✓	✓	✓
255/35R20	97W	9J	260	686	730	1609	340/50	300/A/A	BSW	✓	✓	✓
255/45ZR20	105WXL	8 1/2J	255	738	925	2039	340/50	300/A/A	BSW	✓	✓	✓
255/50R20	109VXL	8J	265	764	1030	2271	340/50	300/A/A	BSW	✓	✓	✓
265/45ZR20	108WXL	9J	266	746	1000	2205	340/50	300/A/A	BSW	✓	✓	✓
265/50R20	111VXL	8 1/2J	277	774	1090	2403	340/50	300/A/A	BSW	✓	✓	✓
275/30R20	97W XL	9 1/2J	278	674	730	1609	340/50	300/A/A	BSW	✓	✓	✓
275/35ZR20	102W	9 1/2J	278	700	850	1874	340/50	300/A/A	BSW	✓	✓	✓
275/40ZR20	106WXL	9 1/2J	278	728	950	2094	340/50	300/A/A	BSW	✓	✓	✓
275/45R20	110VXL	9J	273	756	1060	2337	340/50	300/A/A	BSW	✓	✓	✓
275/50R20	113VXL	8 1/2J	284	784	1150	2535	340/50	300/A/A	BSW	✓	✓	✓
275/55R20	117VXL											

ENRI U08




Asymmetric tread pattern

Asymmetric tread pattern design and functionally differed in medial and lateral sidewall improve steering performance in wet road conditions, and ensure high-speed stability.



Silicon-containing tread compound

New silicon-containing tread compound enhance grip in wet road and reduce rolling resistance.

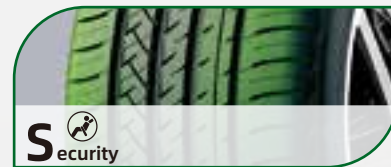


Low-noise design

Creative tread grooves' fine lines design effectively reduce noise at high-speed driving.



Anti-slip design

A mass of steel sheets and grooves design provide great grip ability and driving performance on wetland.

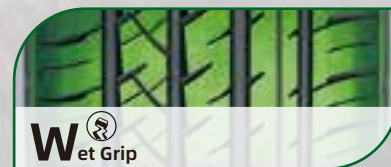


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall				
					(kg)	(Lbs)							
195/45R16	84V XL	6 1/2J	195	582	500	1102	340/50	400/A/A	BSW	✓	✓	✓	✓
205/45R16	87W XL	7J	206	590	545	1201	340/50	400/A/A	BSW	✓	✓	✓	✓
205/50R16	91W XL	6 1/2J	214	612	615	1356	340/50	400/A/A	BSW	✓	✓	✓	✓
205/55R16	94W XL	6 1/2J	214	632	670	1477	340/50	400/A/A	BSW	✓	✓	✓	✓
215/40ZR16	86W XL	7 1/2J	218	578	530	1168	340/50	400/A/A	BSW	✓	✓	✓	✓
215/45R16	90V XL	7J	213	600	600	1323	340/50	400/A/A	BSW	✓	✓	✓	✓
215/55ZR16	97W XL	7J	226	642	730	1609	340/50	400/A/A	BSW	✓	✓	✓	✓
225/50ZR16	96W XL	7J	233	632	710	1565	340/50	400/A/A	BSW	✓	✓	✓	✓
225/55R16	99W XL	7J	233	654	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
NEW 165/35R17	68VXL	6J	170	547	315	694	340/50	400/A/A	BSW	✓	✓	✓	✓
165/40R17	72V	6J	170	564	355	783	340/50	400/A/A	BSW	✓	✓	✓	✓
NEW 165/45R17	76V XL	5 1/2J	165	579	400	882	340/50	400/A/A	BSW	✓	✓	✓	✓
185/35R17	82V	6 1/2J	183	562	475	1047	340/50	400/A/A	BSW	✓	✓	✓	✓
NEW 185/40R17	78V XL	6 1/2J	188	580	425	937	340/50	400/A/A	BSW	✓	✓	✓	✓
195/45ZR17	85W XL	6 1/2J	195	608	515	1135	340/50	400/A/A	BSW	✓	✓	✓	✓
205/40R17	84W XL	7 1/2J	212	596	500	1102	340/50	400/A/A	BSW	✓	✓	✓	✓
205/45R17	88W XL	7J	206	616	560	1235	340/50	400/A/A	BSW	✓	✓	✓	✓
205/50R17	93W XL	6 1/2J	214	638	650	1433	340/50	400/A/A	BSW	✓	✓	✓	✓
205/55ZR17	95W XL	6 1/2J	214	658	690	1521	340/50	400/A/A	BSW	✓	✓	✓	✓
215/40ZR17	87W XL	7 1/2J	218	604	545	1201	340/50	400/A/A	BSW	✓	✓	✓	✓
215/45R17	91W XL	7J	213	626	615	1356	340/50	400/A/A	BSW	✓	✓	✓	✓
215/50R17	95W XL	7J	226	648	690	1521	340/50	400/A/A	BSW	✓	✓	✓	✓
215/55R17	98W XL	7J	226	668	750	1653	340/50	400/A/A	BSW	✓	✓	✓	✓
225/45R17	94W XL	7 1/2J	225	634	670	1477	340/50	400/A/A	BSW	✓	✓	✓	✓
225/50R17	98W XL	7J	233	658	750	1653	340/50	400/A/A	BSW	✓	✓	✓	✓
225/55R17	101W XL	7J	233	680	825	1819	340/50	400/A/A	BSW	✓	✓	✓	✓
235/45R17	97W XL	8J	236	644	730	1609	340/50	400/A/A	BSW	✓	✓	✓	✓
235/50R17	100V	7 1/2J	245	668	800	1764	340/50	400/A/A	BSW	✓	✓	✓	✓
235/55ZR17	103W	7 1/2J	245	690	875	1929	340/50	400/A/A	BSW	✓	✓	✓	✓
245/40ZR17	95W XL	8 1/2J	248	628	690	1521	340/50	400/A/A	BSW	✓	✓	✓	✓
245/45ZR17	99W	8J	243	652	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
185/35R18	83V	6 1/2J	183	587	487	1074	340/50	400/A/A	BSW	✓	✓	✓	✓
215/35ZR18	84W XL	7 1/2J	218	607	500	1102	340/50	400/A/A	BSW	✓	✓	✓	✓
215/40ZR18	89W XL	7 1/2J	218	629	580	1279	340/50	400/A/A	BSW	✓	✓	✓	✓
215/45ZR18	93W XL	7J	213	651	650	1433	340/50	400/A/A	BSW	✓	✓	✓	✓
215/55R18	99V	7J	226	693	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
225/40R18	92W XL	8J	230	637	630	1389	340/50	400/A/A	BSW	✓	✓	✓	✓
225/45R18	95W XL	7 1/2J	225	659	690	1521	340/50	400/A/A	BSW	✓	✓	✓	✓
225/55R18	102V	7J	233	705	850	1874	340/50	400/A/A	BSW	✓	✓	✓	✓
235/40R18	95W XL	8 1/2J	241	645	690	1521	340/50	400/A/A	BSW	✓	✓	✓	✓
235/45ZR18	98W XL	8J	236	669	750	1653	340/50	400/A/A	BSW	✓	✓	✓	✓
235/50R18	97V	7 1/2J	245	693	730	1609	300/44	400/A/A	BSW	✓	✓	✓	✓
235/55R18	104V	7 1/2J	245	715	900	1984	340/50	400/A/A	BSW	✓	✓	✓	✓
245/40R18	97W XL	8 1/2J	248	653	730	1609	340/50	400/A/A	BSW	✓	✓	✓	✓
245/45R18	100W XL	8J	243	677	800	1764	340/50	400/A/A	BSW	✓	✓	✓	✓
245/50ZR18	104W	7 1/2J	253	703	900	1984	340/50	400/A/A	BSW	✓	✓	✓	✓
255/35ZR18	94W XL	9J	260	635	670	1477	340/50	400/A/A	BSW	✓	✓	✓	✓
255/40ZR18	99W XL	9J	260	661	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
255/45ZR18	103W	8 1/2J	255	687	875	1929	340/50	400/A/A	BSW	✓	✓	✓	✓
255/55R18	109V	8J	265	737	1030	2271	340/50	400/A/A	BSW	✓	✓	✓	✓
265/35ZR18	97W XL	9 1/2J	271	643	730	1609	340/50	400/A/A	BSW	✓	✓	✓	✓
275/35ZR18	99W XL	9 1/2J	278	649	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
215/35ZR19	85W XL	7 1/2J	218	633	515	1135	340/50	400/A/A	BSW	✓	✓	✓	✓
225/35ZR19	88W XL	8J	230	641	560	1235	340/50	400/A/A	BSW	✓	✓	✓	✓
225/45ZR19	96W XL	7 1/2J	225	685	710	1565	340/50	400/A/A	BSW	✓	✓	✓	✓
225/55R19	99V	7J	233	731	775	1709	300/44	400/A/A	BSW	✓	✓	✓	✓
235/35ZR19	91W XL	8 1/2J	241	647	615	1356	340/50	400/A/A	BSW	✓	✓	✓	✓
235/40ZR19	96W	8 1/2J	241	671	710	1565	340/50	400/A/A	BSW	✓	✓	✓	✓
235/45ZR19	99W XL	8J	236	695	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
235/50ZR19	103W XL	7 1/2J	245	719	875	1929	340/50	400/A/A	BSW	✓	✓	✓	✓
235/55R19	105V XL	7 1/2J	245	741	925	2039	340/50	400/A/A	BSW	✓	✓	✓	✓
245/35ZR19	93W XL	8 1/2J	248	655	650	1433	340/50	400/A/A	BSW	✓	✓	✓	✓
245/40ZR19	98W XL	8 1/2J	248	679	750	1653	340/50	400/A/A	BSW	✓	✓	✓	✓
245/45R19	102W XL	8J	243	703	850	1874	340/50	400/A/A	BSW	✓	✓	✓	✓
245/55R19	107V XL	7 1/2J	253	753	975	2149	340/50	400/A/A	BSW	✓	✓	✓	✓
255/30ZR19	91Y XL	9J	260	637	615	1356	340/50	400/A/A	BSW	✓	✓	✓	✓
255/35ZR19	96W XL	9J	260	661	710	1565	340/50	400/A/A	BSW	✓	✓	✓	✓
255/40ZR19	100W XL	9J	260	687	800	1764	340/50	400/A/A	BSW	✓	✓	✓	✓
255/45ZR19	104W XL	8 1/2J	255	713	900	1984	340/50	400/A/A	BSW	✓	✓	✓	✓
255/50R19	107V XL	8J	265	739	975	2149	340/50	400/A/A	BSW	✓	✓	✓	✓
275/30ZR19	96W XL	9 1/2J	278	649	710	1565	340/50	400/A/A	BSW	✓	✓	✓	✓
275/35ZR19	100Y XL	9 1/2J	278	675	800	1764	340/50	400/A/A	BSW	✓	✓	✓	✓
275/40ZR19	105W XL	9 1/2J	278	703	925	2039	340/50	400/A/A	BSW	✓	✓	✓	✓
285/45R19	111V XL	9 1/2J	285	739	1090	2403	340/50	400/A/A	BSW	✓	✓	✓	✓
205/35R20	84V	7 1/2J	212	652	500	1102	340/50	400/A/A	BSW	✓	✓	✓	✓
225/35ZR20	90W	8J	230	666	600	1323	340/50	400/A/A	BSW	✓	✓	✓	✓
245/35ZR20	95W XL	8 1/2J	248	680	690	1521	340/50	400/A/A	BSW	✓	✓	✓	✓
245/40ZR20	99W XL	8 1/2J	248	704	775	1709	340/50	400/A/A	BSW	✓	✓	✓	✓
255/35ZR20	97W XL	9J	260	686	730	1609	340/50	400/A/A	BSW	✓	✓	✓	✓
275/30ZR20	97W XL	9 1/2J	278	674	730	1609	340/50	400/A/A	BSW	✓	✓	✓	✓
275/35ZR20	102W XL	9 1/2J	278	700	850	1874	340/50	400/A/A	BSW	✓	✓	✓	✓
265/45ZR21	108W XL	9J	266	771	1000	2205	340/50	400/A/A	BSW	✓	✓	✓	✓
275/45ZR21	110W XL	9J	273	781	1060	2337	340/50	400/A/A	BSW	✓	✓	✓	✓
295/35ZR21	107W XL	10 1/2J	301	739	975	2149	340/50	400/A/A	BSW	✓	✓	✓	✓
295/40ZR21	111W XL	10 1/2J	301	769	1090	2403	340/50	400/A/A	BSW	✓	✓	✓	✓




"V-shaped" pattern design

30 multi-angle "V-shaped" pattern design ensure high-speed handling and stability in straight lines and cornering.

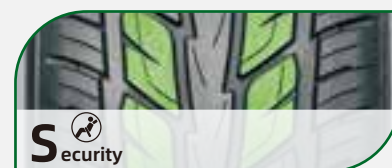


"Y -shaped" directional pattern design

"Y-shaped" directional pattern design provides excellent horizontal or vertical drainage performance.

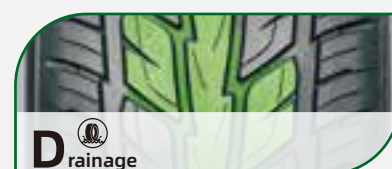


Shoulder design

Open shoulder design self-cleans the slush in the grooves.

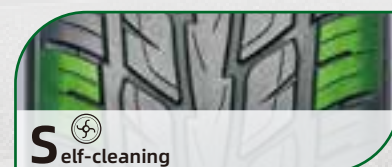

Tread pattern design

Central longitudinal ribs increase the contact area with road surface, and enhance braking performance in any road conditions.

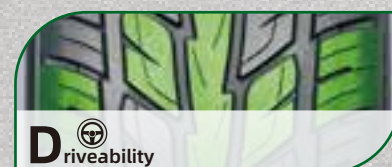

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
255/55R19	111V	8J	265	763	1090	2403	340/50	400/A/A	BSW	✓	✓	✓
265/50R20	111V	8 1/2J	277	774	1090	2403	340/50	400/A/A	BSW	✓	✓	✓
275/40ZR20	106W XL	9 1/2J	278	728	950	2094	340/50	400/A/A	BSW	✓	✓	✓
275/45R20	110V XL	9J	273	756	1060	2337	340/50	400/A/A	BSW	✓	✓	✓
275/55R20	117V XL	8 1/2J	284	810	1285	2833	340/50	400/A/A	BSW	✓	✓	✓
275/60R20	119H XL	8J	279	838	1360	2998	340/50	400/A/A	BSW	✓	✓	✓
285/50R20	116V	9J	297	794	1250	2756	340/50	400/A/A	BSW	✓	✓	✓
295/45ZR20	114W	10J	296	774	1180	2601	340/50	400/A/A	BSW	✓	✓	✓
265/35ZR22	102W XL	9 1/2J	271	745	850	1874	340/50	400/A/A	BSW	✓	✓	✓
265/40R22	106V XL	9 1/2J	271	771	950	2094	340/50	400/A/A	BSW	✓	✓	✓
285/35ZR22	106W	10J	290	759	950	2094	340/50	400/A/A	BSW	✓	✓	✓
285/40R22	110V	10J	290	787	1060	2337	340/50	400/A/A	BSW	✓	✓	✓
295/30ZR22	103W	10 1/2J	301	737	875	1929	340/50	400/A/A	BSW	✓	✓	✓
305/40R22	114V XL	11J	313	803	1180	2601	340/50	400/A/A	BSW	✓	✓	✓
275/25ZR24	96W	10J	283	748	710	1565	340/50	400/A/A	BSW	✓	✓	✓
295/35ZR24	110W	10 1/2J	301	816	1060	2337	340/50	400/A/A	BSW	✓	✓	✓
305/35ZR24	112W	11J	313	824	1120	2469	340/50	400/A/A	BSW	✓	✓	✓
255/50R20	109V XL	8J	265	764	1030	2271	340/50	400/A/A	BSW	✓	✓	✓
255/55R20	110V XL	8J	265	788	1060	2337	340/50	400/A/A	BSW	✓	✓	✓
315/35ZR20	110W XL	11J	320	728	1060	2337	340/50	400/A/A	BSW	✓	✓	✓
275/40ZR22	107W XL	9 1/2J	275	779	975	2149	340/50	400/A/A	BSW	✓	✓	✓
285/45R22	114V XL	9 1/2J	285	815	1180	2601	340/50	400/A/A	BSW	✓	✓	✓
305/45R22	118V XL	10J	303	833	1320	2910	340/50	400/A/A	BSW	✓	✓	✓


L-ZEAL 56 (RFT)

**High-strength bead structure**

High-strength bead structure design prevents the tires from falling off the ring when driving at 0 air pressure, and improves the driving durability.

**Apex Low-heat-generation formula design**


Low-heat-generation formula design of apex can effectively reduce the heat generated when the tire is running under pressure and improve the durability.

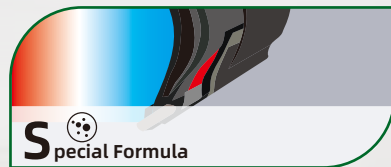**Sidewall with high-strength cord reinforcement layer**

Sidewall adopts a high-strength cord reinforcement layer to increase the sidewall strength, maintain good thermal stability under pressure shortage, and improve low-pressure durability.

**Sidewall with dual composite sidewall support rubber**

Sidewall adopts dual composite sidewall support rubber, which has high support strength and good buffering performance. Unique formula design can improve sidewall strength and reduce heat generation, increasing sidewall durability and providing safe driving.

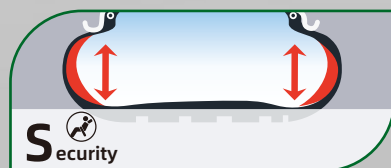

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
205/45ZRF17	88W XL	7J	206	616	560	1235	340/50	300/A/A	BSW	✓	✓	✓
205/50ZRF17	93W XL	6 1/2J	214	638	650	1433	340/50	300/A/A	BSW	✓	✓	✓
225/45ZRF17	94W XL	7 1/2J	225	634	670	1477	340/50	300/A/A	BSW	✓	✓	✓
225/50ZRF17	98W XL	7J	233	658	750	1653	340/50	300/A/A	BSW	✓	✓	✓
225/55RF17	97V	7J	233	680	730	1609	300/44	300/A/A	BSW	✓	✓	✓
235/55RF17	99V	7 1/2J	245	690	775	1709	300/44	300/A/A	BSW	✓	✓	✓
245/40ZRF17	95W XL	8 1/2J	248	628	690	1521	340/50	300/A/A	BSW	✓	✓	✓
245/45ZRF17	99W XL	8J	243	652	775	1709	340/50	300/A/A	BSW	✓	✓	✓
215/55ZRF18	99W XL	7J	226	693	775	1709	340/50	300/A/A	BSW	✓	✓	✓
225/40ZRF18	92W XL	8J	230	637	630	1389	340/50	300/A/A	BSW	✓	✓	✓
225/45ZRF18	95W XL	7 1/2J	225	659	690	1521	340/50	300/A/A	BSW	✓	✓	✓
225/50ZRF18	95W	7J	233	683	690	1521	300/44	300/A/A	BSW	✓	✓	✓
235/50RF18	97V	7 1/2J	245	693	730	1609	300/44	300/A/A	BSW	✓	✓	✓
245/40ZRF18	97W XL	8 1/2J	248	653	730	1609	340/50	300/A/A	BSW	✓	✓	✓
245/45ZRF18	100W XL	8J	243	677	800	1764	340/50	300/A/A	BSW	✓	✓	✓
255/35ZRF18	94W XL	9J	260	635	670	1477	340/50	300/A/A	BSW	✓	✓	✓
255/40ZRF18	99W XL	9J	260	661	775	1709	340/50	300/A/A	BSW	✓	✓	✓
255/45ZRF18	99W	8 1/2J	255	687	775	1709	300/44	300/A/A	BSW	✓	✓	✓
225/35ZRF19	84W	8J	230	641	500	1102	300/44	300/A/A	BSW	✓	✓	✓
225/40ZRF19	93W XL	8J	230	663	650	1433	340/50	300/A/A	BSW	✓	✓	✓
235/35ZRF19	91W XL	8 1/2J	241	647	615	1356	340/50	300/A/A	BSW	✓	✓	✓
235/45ZRF19	95W	8J	236	695	690	1521	300/44	300/A/A	BSW	✓	✓	✓
235/50RF19	99V	7 1/2J	245	719	775	1709	300/44	300/A/A	BSW	✓	✓	✓
245/35ZRF19	93W XL	8 1/2J	248	655	650	1433	340/50	300/A/A	BSW	✓	✓	✓
245/40ZRF19	98W XL	8 1/2J	248	679	750	1653	340/50	300/A/A	BSW	✓	✓	✓
245/45ZRF19	98W	8J	243	703	750	1653	300/44	300/A/A	BSW	✓	✓	✓
255/35ZRF19	96W XL	9J	260	661	710	1565	340/50	300/A/A	BSW	✓	✓	✓
255/45ZRF19	100W	8 1/2J	255	713	800	1764	300/44	300/A/A	BSW	✓	✓	✓
245/35ZRF20	95W XL	8 1/2J	248	680	690	1521	340/50	300/A/A	BSW	✓	✓	✓
245/40ZRF20	99W XL	8 1/2J	248	704	775	1709	340/50	300/A/A	BSW	✓	✓	✓
245/45ZRF20	103W XL	8J	243	728	875	1929	340/50	300/A/A	BSW	✓	✓	✓
275/30ZRF20	97W XL	9 1/2J	278	674	730	1609	340/50	300/A/A	BSW	✓	✓	✓
275/35ZRF20	102W XL	9 1/2J	278	700	850	1874	340/50	300/A/A	BSW	✓	✓	✓
275/40ZRF20	102W	9 1/2J	278	728	850	1874	300/44	300/A/A	BSW	✓	✓	✓
245/50RF18	100V	7 1/2J	253	703	800	1764	300/44	300/A/A	BSW	✓	✓	✓
275/35ZRF19	100W XL	9 1/2J	278	675	800	1764	340/50	300/A/A	BSW	✓	✓	✓
275/40ZRF19	105W XL	9 1/2J	278	703	925	2039	340/50	300/A/A	BSW	✓	✓	✓
285/45RF19	107V	9 1/2J	285	739	975	2149	300/44	300/A/A	BSW	✓	✓	✓
315/35ZRF20	110W XL	11J	320	728	1060	2337	340/50	300/A/A	BSW	✓	✓	✓
235/55RF19	101V	7 1/2J	245	741	825	1819	300/44	300/A/A	BSW	✓	✓	✓
255/45RF20	101V	8 1/2J	255	738	825	1819	300/44	300/A/A	BSW	✓	✓	✓
275/40ZRF18	99W	9 1/2J	278	677	775	1709	300/44	300/A/A	BSW	✓	✓	✓
275/40ZRF19	101W	9 1/2J	278	703	825	1819	300/44	300/A/A	BSW	✓	✓	✓
315/35ZRF20	106W	11J	320	728	950	2094	300/44	300/A/A	BSW	✓	✓	✓
235/55RF18	100V	7 1/2J	245	715	800	1764	300/44	300/A/A	BSW	✓	✓	✓
255/50RF19	103V	8J	265	739	875	1929	300/44	300/A/A	BSW	✓	✓	✓
255/55RF18	105V	8J	265	737	925	2039	300/44	300/A/A	BSW	✓	✓	✓
245/50RF19	105V XL	7 1/2J	253	729	925	2039	340/50	300/A/A	BSW	✓	✓	✓

L-MAX9



Silence design

Silence design of steel sheets. 700 pieces sipes divide the "Z" type tread blocks into small pieces greatly reduce tire noise and improve driving comfort, enjoying quiet and comfortable effect that same series tires cannot bring.



Simulate Design

Simulate double "Y" tread pattern design improve grip performance without reducing tread blocks' rigidity, shorten braking distance, and improve driving safety.



Zigzag grooves

Zigzag pattern grooves design. Classic zigzag grooves provide excellent driving stability, and assure a smooth and comfortable ride.



White sidewall design

White sidewall. The white sidewall with 20mm width design is beautiful and dignified, and it is suitable for car modification.




Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1875/1765	450/65	BSW	✓	✓	✓
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1875/1765	450/65	WSW	✓	✓	✓
195R14C	106/104R	8PR	5 1/2J	198	666	950/900	2094/1984	450/65	BSW	✓	✓	✓
195R14C	106/104R	8PR	5 1/2J	198	666	950/900	2094/1984	450/65	WSW	✓	✓	✓
205R14C	109/107R	8PR	6J	208	686	1030/975	2271/2150	450/65	BSW	✓	✓	✓
205/75R14C	109/107R	8PR	5 1/2J	203	664	1030/975	2271/2149	475/69	BSW/WSW	✓	✓	✓
215R14C	112/110R	8PR	6J	218	700	1120/1060	2469/2337	450/65	BSW	✓	✓	✓
215/75R14C	112/110R	8PR	6J	216	678	1120/1060	2469/2337	475/69	BSW	✓	✓	✓
185R15C	103/102R	8PR	5 1/2J	188	674	875/850	1929/1874	450/65	BSW	✓	✓	✓
195R15C	106/104R	8PR	5 1/2J	196	693	950/900	2094/1984	450/65	WSW	✓	✓	✓
195R15C	106/104R	8PR	5 1/2J	196	693	950/900	2094/1984	450/65	BSW	✓	✓	✓
165/70R14C	89/87R	6PR	5J	170	588	580/545	1279/1202	375/54	BSW	✓	✓	✓
175/65R14C	90/88R	6PR	5J	177	584	600/560	1323/1235	375/54	BSW	✓	✓	✓
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1874	450/65	BSW	✓	✓	✓
205/70R15C	106/104R	8PR	6	209	669	950/900	2094/1984	450/65	BSW	✓	✓	✓
205/75R15C	109/107R	8PR	5 1/2J	203	689	1030/975	2271/2149	475/69	WSW	✓	✓	✓
215/65R15C	104/102R	6PR	6 1/2	221	661	900/850	1984/1874	375/54	BSW	✓	✓	✓
215/70R15C	104/101R	8PR	6 1/2J	221	683	900/825	1984/1819	450/65	BSW	✓	✓	✓
225/70R15C	112/110R	8PR	6 1/2	228	697	1120/1060	2469/2337	450/65	BSW	✓	✓	✓
175/75R16C	101/99R	8PR	5J	177	668	825/775	1819/1705	475/69	BSW	✓	✓	✓
195/60R16C	99/97T	6PR	6	201	640	775/730	1709/1609	375/54	BSW	✓	✓	✓
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2149/2039	475/69	BSW	✓	✓	✓
205/65R16C	107/105R	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	✓	✓	✓
205/75R16C	110/108R	8PR	5 1/2	203	714	1060/1000	2337/2204	475/69	BSW	✓	✓	✓
215/60R16C	103/101T	6PR	6 1/2	221	664	875/825	1929/1819	375/54	BSW	✓	✓	✓
215/65R16C	109/107R	8PR	6 1/2J	221	686	1030/975	2271/2149	475/69	BSW	✓	✓	✓
215/70R16C	108/106R	6PR	6 1/2J	221	708	1000/950	2205/2094	375/54	BSW	✓	✓	✓
225/65R16C	112/110R	8PR	6 1/2J	228	698	1120/1060	2469/2337	475/69	BSW	✓	✓	✓
225/75R16C	116/114R	8PR	6J	223	744	1250/1180	2756/2601	475/69	BSW	✓	✓	✓
235/65R16C	115/113R	8PR	7J	240	712	1215/1150	2679/2535	475/69	BSW	✓	✓	✓
215/60R17C	109/107T	8PR	6 1/2J	221	690	1030/975	2271/2149	475/69	BSW	✓	✓	✓
NEW 215/75R16C	116/114R	10PR	6J	216	728	1250/1180	2756/2601	525/76	BSW	✓	✓	✓

L-STRONG36




Multi-angle design

Multi-angle design tread blocks design with approximate 90 degree stereo angle greatly improve tire's grip performance, increase off-road performance, and enhance vehicle's passage capacity in any extreme conditions.

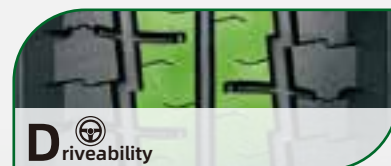


Triple vertical grooves

Triple vertical groove design. 3 main straight line grooves improve drainage, self-cleaning and safety performance.

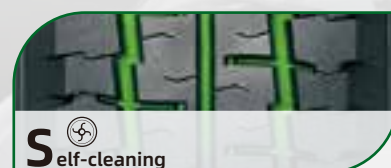

3D shoulder

3D Ups and downs shoulder design improves handling performance and ensure a safe driving.

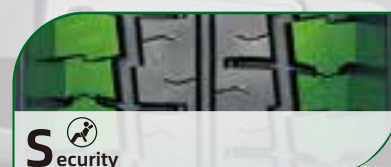

Stone ejection design

Stone removing central grooves design possess a good function of stone removing, enhance the puncture resistance and long mileages.



Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1875/1765	450/65	BSW	✓	✓	✓
195R14C	106/104R	8PR	5 1/2J	198	666	950/900	2094/1984	450/65	BSW	✓	✓	✓
205R14C	109/107R	8PR	6J	208	686	1030/975	2271/2149	450/65	BSW	✓	✓	✓
195R15C	106/104R	8PR	5 1/2J	196	693	950/900	2094/1984	450/65	BSW	✓	✓	✓
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1875	450/65	BSW	✓	✓	✓
225/70R15C	112/110R	8PR	6 1/2J	228	697	1120/1060	2470/2335	450/65	BSW	✓	✓	✓
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1875	475/69	BSW	✓	✓	✓
195/65R16C	104/102R	8PR	6J	201	660	900/850	1984/1875	475/69	BSW	✓	✓	✓
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2150/2040	475/69	BSW	✓	✓	✓
205/65R16C	107/105R	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	✓	✓	✓
205/75R16C	110/108R	8PR	5 1/2J	203	714	1060/1000	2335/2205	475/69	BSW	✓	✓	✓
215/75R16C	116/114R	10PR	6J	216	728	1250/1180	2756/2601	525/76	BSW	✓	✓	✓




L-POWER28




Zigzag grooves

Zigzag groove design. Zigzag and trailed main grooves enhance the strong traction; improve the drainage and anti-skip performance. Large slope tread grooves design provides excellent stone removing performance.

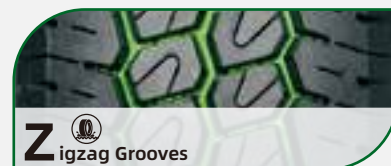


3D steel sheets

3D interlaced steel sheets design. 3D interlaced steel sheets increase the grip ability, braking force and safety of driving.

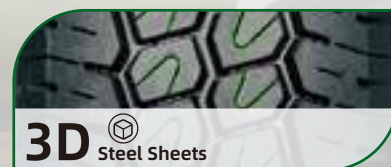


Closed shoulder

Coherent closed shoulder design. Enhanced rid and coherent closed block design on shoulder prevents the leaning-grind caused by heavy rigidity, and remain the high-speed turning agility at the same time.

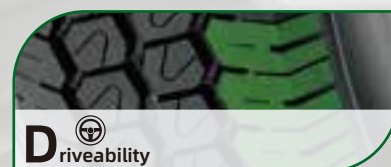

Irregular pattern

Irregular pattern and multi-pitch design brings silence and comfortable ride.

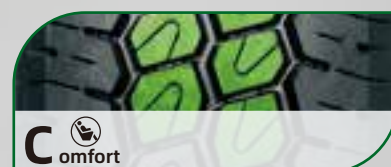

Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
145R12C	86/84Q	8PR	4.00B	145	537	530/500	1168/1102	450/65	BSW	✓	✓	✓
155R12LT/C	88/86S	8PR	4.50B	157	553	560/530	1235/1168	450/65	BSW	✓	✓	✓
155/70R12LT	104/102R	12PR	4.50B	157	523	900/850	1984/1874	650	BSW	✓	✓	✓
NEW 5.00R12LT	83/81Q	8PR	3.50B	143	568	487/462	1074/1019	450/65	BSW	✓	✓	✓
NEW 5.50R12LT	92/90Q	10PR	3.50B	160	595	630/600	1389/1323	560/81	BSW	✓	✓	✓
5.50R13LT	88/84Q	8PR	4.00B	160	620	560/500	1235/1102	460/67	BSW	✓	✓	✓
NEW 145R13C	88/86Q	8PR	4.00B	147	566	560/530	1235/1168	450/65	BSW	✓	✓	✓
155R13LT/C	90/88Q	8PR	4.50B	157	578	600/560	1323/1235	450/65	BSW	✓	✓	✓
165R13LT	94/93R	8PR	4.50B	165	594	670/650	1477/1433	450/65	BSW	✓	✓	✓
165/70R13LT	88/86R	6PR	5.00B	170	562	560/530	1235/1168	375	BSW	✓	✓	✓
175R13LT	97/95R	8PR	5.00B	177	610	730/690	1609/1521	450/65	BSW	✓	✓	✓
165R14LT	91/90R	6PR	4 1/2J	165	620	615/600	1356/1323	350/51	BSW	✓	✓	✓
175R14LT	99/97R	8PR	5J	178	634	775/730	1709/1609	450/65	BSW	✓	✓	✓
175/70R14LT	95/93S	6PR	5J	177	602	690/650	1521/1433	375/54	BSW	✓	✓	✓
175/75R14LT	94/91R	8PR	5J	177	618	670/615	1477/1356	450/65	BSW	✓	✓	✓
165/70R13	79T	-	5.00B	170	562	437	964	300/44	BSW	-	-	-
165/70R14	81T	-	5J	170	588	462	1019	300/44	BSW	-	-	-



MULTIWAYS 52



Zigzag grooves

The Zigzag pattern main grooves design ensures excellent anti-hydro performance and improves wet grip.



Wear-resistant

Deep pattern grooves and high wear-resistant tread compound, ensures excellent wear resistance.



The thicker sidewall

The strengthened carcass and thicker sidewall make the tire stronger with better bearing capacity and puncture resistant.



High-load

Using high-strength steel wire and cap layer in tire structure to make the tire stronger and enhance the reliability and durability .




Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
7.00R16LT	115/110N	12PR	5.50F	200	775	1215/1060	2679/2337	670/97	BSW	-	-	-
7.50R16LT	122/118N	14PR	6.00G	215	805	1500/1320	3307/2910	770/112	BSW	-	-	-


M+S

**Three stepped longitudinal main groove design**


Excellent drainage performance and firm grip on wet and dry roads.

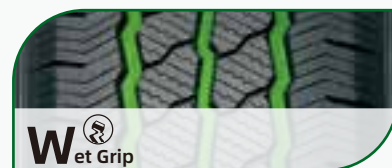**Unique design of the block and the high-density sipe**

Ensure the good heat dissipation of the block with great grip and traction.

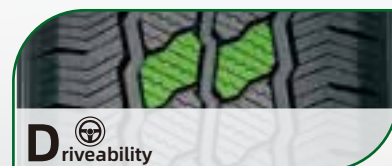**Wide shoulder block design**

Improve the robustness of the block and the durability and load capacity of the tire; enhance the steering performance.

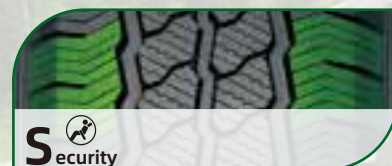**Low noise pattern design**

Closed shoulder effectively prevent the noise spread; the tuned pattern extends to the rear of the shoulders to allow for even wear and further noise elimination.

**Innovative four-season tread compound**

Compound features high grip performance and high temperature resistance, and improve the grip under low temperature conditions.

Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
175/65R14C	90/88T	6PR	5J	177	584	600/560	1323/1235	375/54	BSW	✓	✓	✓
175/70R14C	95/93T	6PR	5J	177	602	690/650	1521/1433	375/54	BSW	✓	✓	✓
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1874	450/65	BSW	✓	✓	✓
205/70R15C	106/104R	8PR	6J	209	669	950/900	2094/1984	450/65	BSW	✓	✓	✓
215/70R15C	109/107R	8PR	6 1/2J	221	683	1030/975	2271/2149	450/65	BSW	✓	✓	✓
225/70R15C	112/110R	8PR	6 1/2J	228	697	1120/1060	2469/2337	450/65	BSW	✓	✓	✓
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1874	475/69	BSW	✓	✓	✓
195/60R16C	99/97H	6PR	6J	201	640	775/730	1709/1609	375/54	BSW	✓	✓	✓
195/65R16C	104/102T	8PR	6J	201	660	900/850	1984/1874	475/69	BSW	✓	✓	✓
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2149/2039	475/69	BSW	✓	✓	✓
205/65R16C	107/105T	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	✓	✓	✓
205/75R16C	113/111R	10PR	5 1/2J	203	714	1150/1090	2535/2403	525/76	BSW	✓	✓	✓
215/60R16C	103/101T	6PR	6 1/2J	221	664	875/825	1929/1819	375/54	BSW	✓	✓	✓
215/65R16C	109/107T	8PR	6 1/2J	221	686	1030/975	2271/2149	475/69	BSW	✓	✓	✓
215/75R16C	113/111R	8PR	6J	216	728	1150/1090	2535/2403	475/69	BSW	✓	✓	✓
225/65R16C	112/110R	8PR	6 1/2J	228	698	1120/1060	2469/2337	475/69	BSW	✓	✓	✓
225/75R16C	121/120R	10PR	6J	223	744	1450/1400	3197/3086	575/83	BSW	✓	✓	✓
235/65R16C	115/113R	8PR	7J	240	712	1215/1150	2679/2535	475/69	BSW	✓	✓	✓
215/60R17C	109/107T	8PR	6 1/2J	221	690	1030/975	2271/2149	475/69	BSW	✓	✓	✓

GREENWING A/S

M+S



Unique directional, streamlined and radial pattern design

Increase the ability of water breaking to reduce hydroplaning, quickly eliminate the road water to improve the wet handling.



Driveability

Streamlined lateral grooves supplemented by sipe design


The streamlined lateral groove improves drainage performance, ensures driving stability for better braking performance.



Wet Grip

High rigidity shoulder design

Adjusted rigidity of the shoulder block to reach more balanced grounding pressure to handle problem of swinging and eccentric for more stable driving.

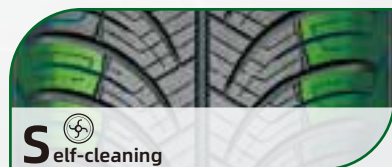

Self-cleaning

Optimized tread pattern design

The pattern groove distribution and the optimized groove angle design reduce the tread pattern noise.



Silence Design

Innovative Four Seasons Tread compound

Compound features high grip performance and high temperature resistance, and improve the grip under low temperature conditions.



Special Formula


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
NEW 145/70R13	71T	4.50B	150	534	345	761	300/44	420/A/A	BSW	✓	✓	✓
NEW 145/80R13	75T	4.00B	145	562	387	853	300/44	420/A/A	BSW	✓	✓	✓
155/65R13	73T	4.50B	157	532	365	805	300/44	420/A/A	BSW	✓	✓	✓
155/70R13	75T	4.50B	157	548	387	853	300/44	--	BSW	✓	✓	✓
155/80R13	79T	4.50B	157	578	437	963	300/44	420/A/A	BSW	✓	✓	✓
165/70R13	79T	5.00B	170	562	437	963	300/44	--	BSW	✓	✓	✓
175/65R13	80T	5.00B	177	558	450	992	300/44	420/A/A	BSW	✓	✓	✓
175/70R13	82T	5J	177	576	475	1047	300/44	--	BSW	✓	✓	✓
155/65R14	75T	4.50B	157	558	387	853	300/44	420/A/A	BSW	✓	✓	✓
165/60R14	75H	5.00B	170	554	387	853	300/44	420/A/A	BSW	✓	✓	✓

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
165/65R14	79T	5J	170	570	437	963	300/44	-	BSW	✓	✓	✓
165/70R14	81T	5J	170	588	462	1019	300/44	-	BSW	✓	✓	✓
175/65R14	82T	5J	177	584	475	1047	300/44	-	BSW	✓	✓	✓
175/70R14	88T XL	5J	177	602	560	1235	340/50	-	BSW	✓	✓	✓
NEW 175/80R14	88T	5J	177	636	560	1235	300/44	420/A/A	BSW	✓	✓	✓
185/55R14	80H	6J	194	560	450	992	300/44	420/A/A	BSW	✓	✓	✓
185/60R14	82H	5 1/2J	189	578	475	1047	300/44	-	BSW	✓	✓	✓
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	-	BSW	✓	✓	✓
185/70R14	88H	5 1/2J	189	616	560	1235	300/44	420/A/A	BSW	✓	✓	✓
NEW 195/70R14	91H	6J	201	630	615	1356	300/44	420/A/A	BSW	✓	✓	✓
NEW 165/60R15	81H XL	5J	170	579	462	1019	340/50	420/A/A	BSW	✓	✓	✓
NEW 165/65R15	81T	5J	170	595	462	1019	300/44	420/A/A	BSW	✓	✓	✓
NEW 175/55R15	77H	5 1/2J	182	573	412	908	300/44	420/A/A	BSW	✓	✓	✓
175/60R15	81H	5J	177	591	462	1019	300/44	420/A/A	BSW	✓	✓	✓
175/65R15	84H	5J	177	609	500	1102	300/44	-	BSW	✓	✓	✓
185/55R15	82H	6J	194	585	475	1047	300/44	-	BSW	✓	✓	✓
185/60R15	88H XL	5 1/2J	189	603	560	1235	340/50	-	BSW	✓	✓	✓
185/65R15	92T XL	5 1/2J	189	621	630	1389	340/50	-	BSW	✓	✓	✓
195/50R15	82V	6J	201	577	475	1047	300/44	-	BSW	✓	✓	✓
195/55R15	85H	6J	201	595	515	1135	300/44	-	BSW	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	-	BSW	✓	✓	✓
195/65R15	91H	6J	201	635	615	1356	300/44	-	BSW	✓	✓	✓
195/65R15	95V XL	6J	201	635	690	1521	340/50	-	BSW	✓	✓	✓
205/65R15	94V	6J	209	647	670	1477	300/44	-	BSW	✓	✓	✓
215/65R15	96H	6 1/2J	221	661	710	1565	300/44	420/A/A	BSW	✓	✓	✓
195/45R16	84V XL	6 1/2J	195	582	500	1102	340/50	-	BSW	✓	✓	✓
195/50R16	88V XL	6J	201	602	560	1235	340/50	420/A/A	BSW	✓	✓	✓
195/55R16	91V XL	6J	201	620	615	1356	340/50	-	BSW	✓	✓	✓
NEW 195/60R16	89H	6J	201	640	580	1278	300/44	420/A/A	BSW	✓	✓	✓
205/45ZR16	87W XL	7J	206	590	545	1201	340/50	420/A/A	BSW	✓	✓	✓
NEW 205/50ZR16	91W XL	6 1/2J	214	612	615	1356	340/50	420/A/A	BSW	✓	✓	✓
205/55R16	91H	6 1/2J	214	632	615	1356	300/44	-	BSW	✓	✓	✓
205/55R16	94V XL	6 1/2J	214	632	670	1477	340/50	-	BSW	✓	✓	✓
205/60R16	96V XL	6J	209	652	710	1565	340/50	-	BSW	✓	✓	✓
215/45R16	90V XL	7J	213	600	600	1323	340/50	420/A/A	BSW	✓	✓	✓
215/55R16	97V XL	7J	226	642	730	1609	340/50	-	BSW	✓	✓	✓
215/60R16	99H XL	6 1/2J	221	664	775	1709	340/50	-	BSW	✓	✓	✓
215/65R16	102H XL	6 1/2J	221	686	850	1874	340/50	420/A/A	BSW	✓	✓	✓
NEW 215/70R16	100H	6 1/2J	221	708	800	1764	300/44	420/A/A	BSW	✓	✓	✓
225/55ZR16	99W XL	7J	233	654	775	1709	340/50	420/A/A	BSW	✓	✓	✓
225/60R16	98H	6 1/2J	228	676	750	1653	300/44	420/A/A	BSW	✓	✓	✓
235/60R16	100H	7J	240	688	800	1764	300/44	420/A/A	BSW	✓	✓	✓
205/40ZR17	84W XL	7 1/2J	212	596	500	1102	340/50	420/A/A	BSW	✓	✓	✓
205/45ZR17	88W XL	7J	206	616	560	1235	340/50	420/A/A	BSW	✓	✓	✓
205/50ZR17	93W XL	6 1/2J	214	638	650	1433	340/50	-	BSW	✓	✓	✓
205/55ZR17	95W XL	6 1/2J	214	658	690	1521	340/50	-	BSW	✓	✓	✓
NEW 215/40ZR17	87W XL	7 1/2J	218	604	545	1201	340/50	420/A/A	BSW	✓	✓	✓
215/45ZR17	91W XL	7J	213	626	615	1356	340/50	420/A/A	BSW	✓	✓	✓
215/50ZR17	95W XL	7J	226	648	690	1521	340/50	-	BSW	✓	✓	✓
215/55ZR17	98W XL	7J	226	668	750	1653	340/50	-	BSW	✓	✓	✓
215/60R17	96H	6 1/2J	221	690	710	1565	300/44	-	BSW	✓	✓	✓
NEW 215/65R17	99T	6 1/2J	221	712	775	1709	300/44	420/A/A	BSW	✓	✓	✓
225/45ZR17	94W XL	7 1/2J	225	634	670	1477	340/50	-	BSW	✓	✓	✓
225/50ZR17	98W XL	7J	233	658	750	1653	340/50	-	BSW	✓	✓	✓
225/55ZR17	101W XL	7J	233	680	825	1819	340/50	420/A/A	BSW	✓	✓	✓
225/60R17	99H	6 1/2J	228	702	775	1709	300/44	420/A/A	BSW	✓	✓	✓
225/65R17	106H XL	6 1/2J	228	724	950	2094	340/50	-	BSW	✓	✓	✓
235/45ZR17	97W XL	8J	236	644	730	1609	340/50	-	BSW	✓	✓	✓
235/55ZR17	103W XL	7 1/2J	245	690	875	1929	340/50	420/A/A	BSW	✓	✓	✓
235/65R17	108H XL	7J	240	738	1000	2205	340/50	420/A/A	BSW	✓	✓	✓
NEW 245/45ZR17	99W XL	8J	243	652	775	1709	340/50	420/A/A	BSW	✓	✓	✓
NEW 255/60R17	110H XL	7 1/2J	260	738	1060	2337	340/50	420/A/A	BSW	✓	✓	✓
NEW 215/55R18	99V XL	7J	226	693	775	1709	340/50	420/A/A	BSW	✓	✓	✓
225/40ZR18	92W XL	8J	230	637	630	1389	340/50	-	BSW	✓	✓	✓
225/45ZR18	95W XL	7 1/2J	225	659	690	1521	340/50	420/A/A	BSW	✓	✓	✓
225/50ZR18	99W XL	7J	233	683	775	1709	340/50	420/A/A	BSW	✓	✓	✓
225/55R18	98V	7J	233	705	750	1653	300/44	-	BSW	✓	✓	✓
NEW 235/40ZR18	95W XL	8 1/2J	241	645	690	1521	340/50	420/A/A	BSW	✓	✓	✓
NEW 235/45ZR18	98W XL	8J	236	669	750	1653	340/50	420/A/A	BSW	✓	✓	✓
235/50ZR18	101W XL	7 1/2J	245	693	825	1819	340/50	-	BSW	✓	✓	✓
NEW 235/55R18	104V XL	7 1/2J	245	715	900	1984	340/50	420/A/A	BSW	✓	✓	✓
235/60R18	107V XL	7J	240	739	975	2149	340/50	-	BSW	✓	✓	✓
245/40ZR18	97W XL	8 1/2J	248	653	730	1609	340/50	420/A/A	BSW	✓	✓	✓
245/45ZR18	100W XL	8J	243	677	800	1764	340/50	-	BSW	✓	✓	✓
NEW 255/55R18	105V	8J	265	737	925	2039	300/44	420/A/A	BSW	✓	✓	✓
NEW 255/60R18	112H XL	7 1/2J	260	763	1120	2469	340/50	420/A/A	BSW	✓	✓	✓
NEW 155/70R19	84T	4 1/2J	157	701	500	1102	300/44	420/A/A	BSW	✓	✓	✓
NEW 205/55R19	97V XL	6 1/2J	214	709	730	1609	340/50	420/A/A	BSW	✓	✓	✓
NEW 225/35ZR19	88W XL	8J	230	641	560	1235	340/50	420/A/A	BSW	✓	✓	✓
NEW 225/40ZR19	93W XL	8J	230	663	650	1433	340/50	420/A/A	BSW	✓	✓	✓
NEW 225/45ZR19	96W XL	7 1/2J	225	685	710	1565	340/50	420/A/A	BSW	✓	✓	✓
NEW 225/55R19	99V	7J	233	731	775	1709	300/44	420/A/A	BSW	✓	✓	✓
NEW 235/35ZR19	91W XL	8 1/2J	241	647	615	1356	340/50	420/A/A	BSW	✓	✓	✓
NEW 235/45ZR19	99W XL	8J	236	695	775	1709	340/50	420/A/A	BSW			

X-SPORTER EV

Comfortable and quiet

The three-in-one compound pitch design can effectively reduce the tire tread noise. The tire blocks with different sizes are optimized by computer simulation, so that the sound energy tends to be evenly dispersed and the tire quiet performance is improved.

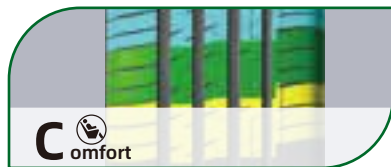


High speed and stability

The broad shoulder pattern can reduce the creep of tread pattern during high-speed cornering and steering, provide excellent grip and improve high-speed cornering stability. The intensity of each pattern block is optimized by computer simulation, which brings the vehicle high-speed stability and driving accuracy.




Precise control

Asymmetrical pattern design, high rigidity pattern on the outside to improve control stability, and linear pattern on the inside to improve wetland performance; The lateral penetration steel sheet reduces the stiffness of the pattern and improves the comfort; The lateral shoulder block is designed with continuous decorative block to bring a good control experience.

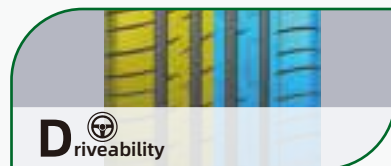

Safety on dry and wet land

The widened main ditch design is adopted to improve the drainage performance of wet road in rainy days. The inner and outer responsive curved cutter-groove design improves the dry and wet land performance of tires; Interactive design of intermediate pattern groove and three-dimensional Angle cutting design can effectively break the water film on wet road and improve the wet performance of tires.

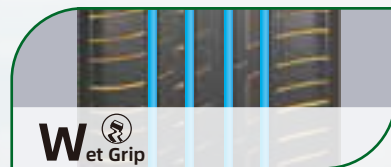

Excellent wet grip and low rolling resistance

Excellent wet grip and low rolling resistance tread formula design, tread adopts a new generation of nano-silicon ultra-low roll resistance formula design, effectively improve the range of new energy vehicles; The uniform design of pressure distribution, computer simulation analysis to optimize the tire ground shape, improve the tire ground area, ensure the tire comprehensive performance.



Velvet design
premium velvet touch effect
sidewall mark



Quiet cotton technology
Use a special polyurethane
foam sponge

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
235/45R18	98W	8J	236	669	750	1653	340/50	320/A/A	BSW	✓	✓	✓
235/35ZR20	92Y	8 1/2J	241	672	630	1389	340/50	320/A/A	BSW	✓	✓	✓
235/40R19	96W	8 1/2J	241	671	710	1565	340/50	320/A/A	BSW	✓	✓	✓
235/35ZR20	92Y/92W	8 1/2J	241	672	630	1389	340/50	320/A/A	BSW	✓	✓	✓
275/35R19 100W	100Y	9 1/2J	278	675	800	1764	340/50	320/A/A	BSW	✓	✓	✓
275/30ZR20 97Y	97W	9 1/2J	278	674	730	1609	340/50	320/A/A	BSW	✓	✓	✓
245/35ZR20	95Y	8 1/2J	248	680	690	1521	340/50	320/A/A	BSW	✓	✓	✓
245/35ZR20	95Y/95W	8 1/2J	248	680	690	1521	340/50	320/A/A	BSW	✓	✓	✓
285/30ZR20 99Y	99W	10J	290	680	775	1709	340/50	320/A/A	BSW	✓	✓	✓
255/45R19	104W	8 1/2J	255	713	900	1984	340/50	320/A/A	BSW	✓	✓	✓
215/55R18	99V	7J	226	693	775	1709	340/50	320/A/A	BSW	✓	✓	✓
235/60R18	107H	7J	240	739	975	2149	340/50	320/A/A	BSW	✓	✓	✓
235/55R19	105V	7 1/2J	245	741	925	2039	340/50	320/A/A	BSW	✓	✓	✓
235/50R20	104	7 1/2J	245	744	900	1984	340/50	320/A/A	BSW	✓	✓	✓
255/50R19 103T	107V	8J	265	739	975	2149	340/50	320/A/A	BSW	✓	✓	✓
255/45R20 101T	105W	8 1/2J	255	738	925	2039	340/50	320/A/A	BSW	✓	✓	✓
205/55R16	91V	6.5J	214	632	615	1356	300/44	320/A/A	BSW	✓	✓	✓
185/65R15	92TXL	5.5J	189	621	630	1389	340/50	320/A/A	BSW	✓	✓	✓
195/55R16	91V	6J	201	620	615	1356	340/50	320/A/A	BSW	✓	✓	✓
205/45R17	88W	7J	206	616	560	1235	340/50	320/A/A	BSW	✓	✓	✓
215/55R17	94V	7J	226	668	670	1477	300/44	320/A/A	BSW	✓	✓	✓
215/50R18	92W	7J	226	673	630	1389	300/44	320/A/A	BSW	✓	✓	✓
255/55R19	111V	8J	265	763	1090	2403	340/50	320/A/A	BSW	✓	✓	✓
255/50R20	109VXL	8J	265	764	1030	2271	340/50	320/A/A	BSW	✓	✓	✓
255/35ZR21	98W XL	9J	260	711	750	1653	340/50	320/A/A	BSW	✓	✓	✓
275/35ZR21	103W XL	9 1/2J	278	725	875	1929	340/50	320/A/A	BSW	✓	✓	✓



MAHO 77



All season tread design

All season tread design superior comprehensive performance.




Silence design

5 pitches design with best pattern permutation effectively reduce noise and show extremely silence.



Coordinated tread pattern

Ribs pattern in central tread and coordinated tread blocks on both sides ensure excellent steering and handling performance.

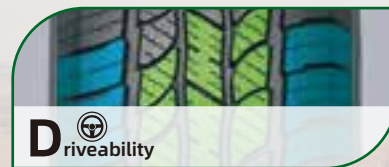

High density grooves

High density grooves design. Pattern with a mass of grooves increase the contact area with road surface, enhance the drainage and wetland grip ability. Shorten the wetland braking distance.



Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
215/75R15	100H	6J	216	703	800	1763	300/44	460/A/A	BSW	✓	✓	✓
225/75R15	102H	6J	223	719	850	1873	300/44	460/A/A	BSW	✓	✓	✓
235/75R15	105H	6 1/2J	235	733	925	2039	300/44	460/A/A	BSW	✓	✓	✓
265/70R15	112T	8J	272	753	1120	2469	300/44	460/A/A	BSW	✓	✓	✓
215/65R16	102H	6 1/2J	221	686	850	1873	340/50	460/A/A	BSW	✓	✓	✓
215/70R16	100H	6 1/2J	221	708	800	1763	300/44	460/A/A	BSW	✓	✓	✓
225/70R16	103H	6 1/2J	228	722	875	1929	300/44	460/A/A	BSW	✓	✓	✓
225/75R16	104T	6J	223	744	900	1984	300/44	460/A/A	BSW	✓	✓	✓
235/70R16	106H	7J	240	736	950	2094	300/44	460/A/A	BSW	✓	✓	✓
245/70R16	111H	7J	248	750	1090	2403	340/50	460/A/A	BSW	✓	✓	✓
255/70R16	111H	7 1/2J	260	764	1090	2403	300/44	460/A/A	BSW	✓	✓	✓
265/70R16	112T	8J	272	778	1120	2469	300/44	460/A/A	BSW	✓	✓	✓
265/75R16	116T	7 1/2J	267	804	1250	2755	300/44	460/A/A	BSW	✓	✓	✓
215/60R17	100H	6 1/2J	221	690	800	1763	340/50	460/A/A	BSW	✓	✓	✓
215/65R17	99V	6 1/2J	221	712	775	1708	300/44	460/A/A	BSW	✓	✓	✓
235/60R17	102H	7J	240	714	850	1873	300/44	460/A/A	BSW	✓	✓	✓
235/65R17	108H	7J	240	738	1000	2204	340/50	460/A/A	BSW	✓	✓	✓
235/70R17	107H	7J	240	762	975	2149	300/44	460/A/A	BSW	✓	✓	✓
245/65R17	111H	7J	248	750	1090	2403	340/50	460/A/A	BSW	✓	✓	✓
265/65R17	112H	8J	272	776	1120	2469	300/44	460/A/A	BSW	✓	✓	✓
265/70R17	115H	8J	272	804	1215	2678	300/44	460/A/A	BSW	✓	✓	✓
235/60R18	107H	7J	240	739	975	2149	340/50	460/A/A	BSW	✓	✓	✓
245/60R18	105H	7J	248	751	925	2039	300/44	460/A/A	BSW	✓	✓	✓
255/60R18	112H	7 1/2J	260	763	1120	2469	340/50	460/A/A	BSW	✓	✓	✓
265/60R18	114H	8J	272	775	1180	2601	340/50	460/A/A	BSW	✓	✓	✓
275/65R18	116H	8J	279	815	1250	2755	300/44	460/A/A	BSW	✓	✓	✓
255/55R19	111V	8J	265	763	1090	2403	340/50	460/A/A	BSW	✓	✓	✓

L-FINDER78




Optimized main grooves

Four main grooves design. Four optimized main vertical grooves enhance the drainage performance, shorten the braking distance. Increase the handling ability on dry and wet road.




Wide and large shoulder

Wide shoulder groove design. Wide and large shoulder grooves increase the grip ability and trafficability, ensure the low heat generation and riding safety.

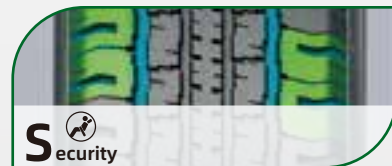

Changeable grooves

Optimized groove design. Unique pattern design with changeable width provide strong grip on muddy roads and ensure the trafficability under bad road condition.

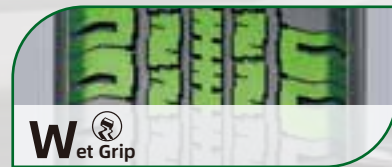

Silence design


Optimized block distance design. Accurate distance design of block and angle, reduce the driving noise, provide silent and comfortable high-speed ride.




Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
						(kg)	(Lbs)						
P215/75R15	100T	-	6J	216	703	800	1764	300/44	420/A/A	BSW	✓	✓	✓
P235/75R15	105T	-	6 1/2J	235	733	925	2039	300/44	420/A/A	BSW	✓	✓	✓
P215/70R16	99T	-	6 1/2J	221	708	775	1709	300/44	420/A/A	BSW	✓	✓	✓
P225/70R16	101T	-	6 1/2J	228	722	825	1819	300/44	420/A/A	BSW	✓	✓	✓
P225/75R16	104T	-	6	223	744	900	1984	300/44	420/A/A	BSW	✓	✓	✓
P235/70R16	107T	-	7	240	736	975	2149	340/50	420/A/A	BSW	✓	✓	✓
P235/75R16	109T	-	6 1/2J	235	758	1030	2271	340/50	420/A/A	BSW	✓	✓	✓
P245/70R16	106T	-	7	248	750	950	2094	300/44	420/A/A	BSW	✓	✓	✓
P255/65R16	106T	-	7 1/2J	260	738	950	2094	300/44	420/A/A	BSW	✓	✓	✓
P255/70R16	109T	-	7 1/2J	260	764	1030	2271	300/44	420/A/A	BSW	✓	✓	✓
P265/70R16	111T	-	8J	272	778	1090	2403	300/44	420/A/A	BSW	✓	✓	✓
P225/65R17	102T	-	6 1/2J	228	724	850	1874	300/44	420/A/A	BSW	✓	✓	✓
P235/60R17	100T	-	7	240	714	800	1764	300/44	420/A/A	BSW	✓	✓	✓
P235/65R17	103T	-	7	240	738	875	1929	300/44	420/A/A	BSW	✓	✓	✓
P245/65R17	105T	-	7	248	750	925	2039	300/44	420/A/A	BSW	✓	✓	✓
P265/70R17	113T	-	8J	272	804	1150	2535	300/44	420/A/A	BSW	✓	✓	✓
P235/60R18	102T	-	7	240	739	850	1874	300/44	420/A/A	BSW	✓	✓	✓
P235/65R18	104T	-	7	240	763	900	1984	300/44	420/A/A	BSW	✓	✓	✓
31*10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	-	BSW	✓	✓	✓
LT225/75R16	115/112Q	10PR	6J	223	744	1215/1120	2680/2470	550/80	-	BSW	✓	✓	✓
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	-	BSW	✓	✓	✓
LT245/75R16	120/116Q	10PR	7J	248	774	1380/1260	3042/2778	550/80	-	BSW	✓	✓	✓
LT265/75R16	123/120Q	10PR	7 1/2J	267	804	1550/1400	3415/3085	550/80	-	BSW	-	-	-
LT235/80R17	120/117Q	10PR	6 1/2J	235	808	1400/1285	3085/2835	550/80	-	BSW	✓	✓	✓
LT245/70R17	119/116Q	10PR	7J	248	776	1360/1250	3000/2755	550/80	-	BSW	✓	✓	✓
LT245/75R17	121/118Q	10PR	7J	248	800	1450/1320	3195/2910	550/80	-	BSW	✓	✓	✓
LT265/70R17	121/118Q	10PR	8J	272	804	1450/1320	3195/2910	550/80	-	BSW	✓	✓	✓

**Four wide vertical drainage grooves**


Offer necessary high-speed performance of SUV and cross country vehicle, provide great wetland drainage, and improve steering and handling ability on wet road.

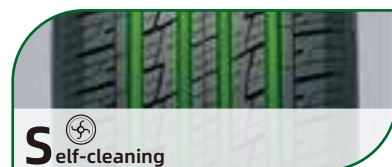**Directional rib in the center of crown with particularly**


Designed lateral grooves and multiple sipes for balanced block rigidity, provide excellent drainage performance, ensure good handing performance in rain or snow.

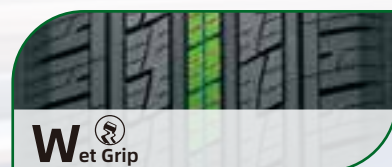**Continuously closed design on the tire shoulder and supported by longitudinal vertical grooves**

Reduce the rigidity of tire shoulder and restrain the eccentric wear effectively, block noise spread of central pattern, reduce the noise and bring extraordinary driving comfortability.

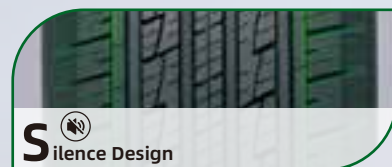**Restrain the eccentric wear rib design on tire shoulder**

Stabilize tire shoulder contour, reduce eccentric wear of tire shoulder, and improve the handling stability when turning at high speed.

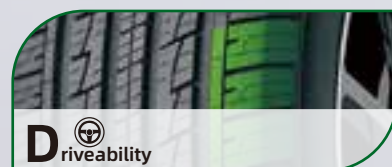


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
					(kg)	(Lbs)						
215/65R16	98H	6 1/2J	221	686	750	1653	300/44	420/A/A	BSW	✓	✓	✓
215/70R16	100H	6 1/2J	221	708	800	1764	300/44	420/A/A	BSW	✓	✓	✓
225/70R16	107H XL	6 1/2J	228	722	975	2149	340/50	420/A/A	BSW	✓	✓	✓
235/60R16	100H	7J	240	688	800	1764	300/44	420/A/A	BSW	✓	✓	✓
235/70R16	106H	7J	240	736	950	2094	300/44	420/A/A	BSW	✓	✓	✓
245/70R16	111H XL	7J	248	750	1090	2403	340/50	420/A/A	BSW	✓	✓	✓
255/65R16	109H	7 1/2J	260	738	1030	2271	300/44	420/A/A	BSW	✓	✓	✓
255/70R16	111T	7 1/2J	260	764	1090	2403	300/44	420/A/A	BSW	✓	✓	✓
265/70R16	112T	8J	272	778	1120	2469	300/44	420/A/A	BSW	✓	✓	✓
275/70R16	114T	8J	279	792	1180	2601	300/44	420/A/A	BSW	✓	✓	✓
215/60R17	96H	6 1/2J	221	690	710	1565	300/44	420/A/A	BSW	✓	✓	✓
215/65R17	99V	6 1/2J	221	712	775	1709	300/44	420/A/A	BSW	✓	✓	✓
225/60R17	99H	6 1/2J	228	702	775	1709	300/44	420/A/A	BSW	✓	✓	✓
235/60R17	106H XL	7J	240	714	950	2094	340/50	420/A/A	BSW	✓	✓	✓
225/65R17	102H	6 1/2J	228	724	850	1874	300/44	420/A/A	BSW	✓	✓	✓
235/65R17	104H	7J	240	738	900	1984	300/44	420/A/A	BSW	✓	✓	✓
245/65R17	111H XL	7J	248	750	1090	2403	340/50	420/A/A	BSW	✓	✓	✓
245/70R17	114T XL	7J	248	776	1180	2601	340/50	420/A/A	BSW	✓	✓	✓
255/60R17	110H XL	7 1/2J	260	738	1060	2337	340/50	420/A/A	BSW	✓	✓	✓
255/65R17	110H	7 1/2J	260	764	1060	2337	300/44	420/A/A	BSW	✓	✓	✓
265/65R17	112H	8J	272	776	1120	2469	300/44	420/A/A	BSW	✓	✓	✓
265/70R17	115T	8J	272	804	1215	2679	300/44	420/A/A	BSW	✓	✓	✓
275/65R17	115T	8J	279	790	1215	2679	300/44	420/A/A	BSW	✓	✓	✓
285/65R17	116T	8 1/2J	292	802	1250	2756	300/44	420/A/A	BSW	✓	✓	✓
225/55R18	98H	7J	233	705	750	1653	300/44	420/A/A	BSW	✓	✓	✓
235/55R18	104H XL	7 1/2J	245	715	900	1984	340/50	420/A/A	BSW	✓	✓	✓
225/60R18	104H XL	6 1/2J	228	727	900	1984	340/50	420/A/A	BSW	✓	✓	✓
235/60R18	107H XL	7J	240	739	975	2149	340/50	420/A/A	BSW	✓	✓	✓
235/65R18	110H XL	7J	240	763	1060	2337	340/50	420/A/A	BSW	✓	✓	✓
245/60R18	105H	7J	248	751	925	2039	300/44	420/A/A	BSW	✓	✓	✓
255/60R18	112H XL	7 1/2J	260	763	1120	2469	340/50	420/A/A	BSW	✓	✓	✓
255/70R18	113T	7 1/2J	260	815	1150	2535	300/44	420/A/A	BSW	✓	✓	✓
265/60R18	110H	8J	272	775	1060	2337	300/44	420/A/A	BSW	✓	✓	✓
265/70R18	116T	8J	272	829	1250	2756	300/44	420/A/A	BSW	✓	✓	✓
275/60R18	117H XL	8J	279	787	1285	2833	340/50	420/A/A	BSW	✓	✓	✓
285/60R18	116H	8 1/2J	292	799	1250	2756	300/44	420/A/A	BSW	✓	✓	✓
235/65R19	109H XL	7	240	789	1030	2271	340/50	420/A/A	BSW	✓	✓	✓
245/55R19	107V XL	7 1/2J	253	753	975	2149	340/50	420/A/A	BSW	✓	✓	✓
255/50R19	107V XL	8J	265	739	975	2149	340/50	420/A/A	BSW	✓	✓	✓
255/55R19	111V XL	8J	265	763	1090	2403	340/50	420/A/A	BSW	✓	✓	✓
285/50R20	116V XL	9J	297	794	1250	2756	340/50	420/A/A	BSW	✓	✓	✓
NEW 235/60R19	107H XL	7J	240	765	975	2149	340/50	420/A/A	BSW	✓	✓	✓

MAGA A/T ONE



All-terrain design

All-terrain four season tire pattern, more strengthful tread block design.

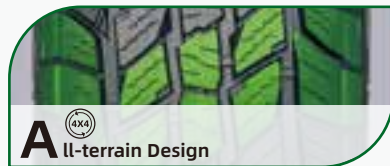


Stone ejection design

Open tread pattern design effectively prevents stone retention, strengthen stone ejection performance.



Zigzag steel sheets

Small zigzag "3D steel sheet" design effectively deliver grips on wet road conditions, enhance driving traction.

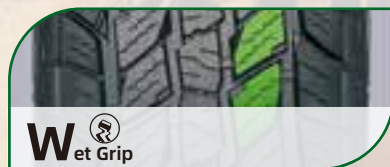

Abrasion resistance formula

Special tread glue formula delivers a longer life.



Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
						(kg)	(Lbs)						
235/75R15	109S XL	-	6 1/2J	235	733	1030	2271	340/50	460/A/A	BSW	√	√	√
235/70R16	106T	-	7J	240	736	950	2094	300/44	460/A/A	BSW	√	√	√
245/70R16	107T	-	7J	248	750	975	2149	300/44	460/A/A	BSW	√	√	√
265/70R16	112T	-	8J	272	778	1120	2469	300/44	460/A/A	BSW	√	√	√
235/65R17	104T	-	7J	240	738	900	1984	300/44	460/A/A	BSW	√	√	√
245/65R17	107S	-	7J	248	750	975	2149	300/44	460/A/A	BSW	√	√	√
265/70R17	115S	-	8J	272	804	1215	2679	300/44	460/A/A	BSW	√	√	√
31X10.50R15LT	109S	6PR	8 1/2J	268	775	1030	2270	350/50	-	BSW	√	√	√
LT225/75R16	115/112Q	10PR	6J	223	744	1215/1120	2470/2680	550/80	-	BSW	√	√	√
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	-	BSW	√	√	√
LT245/75R16	120/116Q	10PR	7J	248	774	1380/1260	3042/2778	550/80	-	BSW	√	√	√
LT265/70R17	121/118R	10PR	8J	272	804	1450/1320	3195/2910	550/80	-	BSW	√	√	√


MAGA A/T TWO

**All-terrain design**


All-terrain four season tire pattern, more strengthful tread block design.

**Stone ejection design**


Open tread pattern design effectively prevents stone retention, strengthen stone ejection performance.

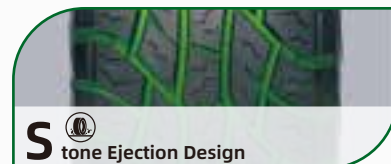**Zigzag steel sheets**

Small zigzag "3D steel sheet" design effectively deliver grips on wet road conditions, enhance driving traction.

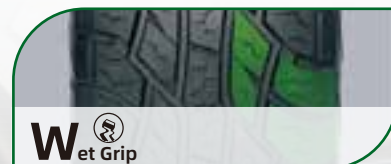**Abrasion resistance formula**

Special tread glue formula delivers a longer life.

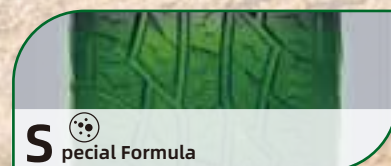

Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
						(kg)	(Lbs)						
175/75R13	84T	-	5.00B	177	593	500	1102	300/44	400/A/A	BSW	-	-	-
175/75R14	86T	-	5J	177	618	530	1168	300/44	400/A/A	BSW	-	-	-
205/60R15	91H	-	6J	209	627	615	1356	300/44	400/A/A	BSW	-	-	-
205/65R15	94H	-	6J	209	647	670	1477	300/44	400/A/A	BSW	-	-	-
(P) 205/70R15	96H	-	6J	209	669	710	1565	300/44	400/A/A	B/W	-	-	-
205/60R16	92H	-	6J	209	652	630	1389	300/44	400/A/A	BSW	-	-	-
215/65R16	98T	-	6 1/2J	221	686	750	1653	300/44	400/A/A	BSW	✓	✓	✓
225/70R16	103T	-	6 1/2J	228	722	875	1929	300/44	400/A/A	BSW	✓	✓	✓
245/75R16	111T	-	7J	248	774	1090	2403	300/44	400/A/A	WSW	✓	✓	✓
255/70R16	111T	-	7 1/2J	260	764	1090	2403	300/44	400/A/A	WSW	✓	✓	✓
265/70R16	112T	-	8J	272	778	1120	2469	300/44	400/A/A	BSW	✓	✓	✓
215/65R17	99T	-	6 1/2J	221	712	775	1708	300/44	400/A/A	BSW	✓	✓	✓
225/60R17	99H	-	6 1/2J	228	702	775	1708	300/44	400/A/A	BSW	✓	✓	✓
265/65R17	112T	-	8J	272	776	1120	2469	300/44	460/A/A	BSW/WSW	✓	✓	✓
265/70R17	115S	-	8J	272	804	1215	2679	300/44	460/A/A	BSW	✓	✓	✓
275/65R17	115T	-	8J	279	790	1215	2679	300/44	400/A/A	WSW	✓	✓	✓
285/65R17	116T	-	8 1/2J	292	802	1250	2755	300/44	400/A/A	WSW	✓	✓	✓
255/60R18	112T	-	7 1/2J	260	763	1120	2469	340/50	400/A/A	BSW	✓	✓	✓
265/60R18	110T	-	8J	272	775	1060	2336	300/44	400/A/A	BSW/WSW	✓	✓	✓
275/65R18	116T	-	8J	279	815	1250	2755	300/44	400/A/A	BSW	✓	✓	✓
285/60R18	120S XL	-	8 1/2J	292	799	1400	3086	340/50	460/A/A	BSW	✓	✓	✓
NEW 305/60R18	120S	-	9J	311	823	1400	3086	300/44	460/A/A	BSW	✓	✓	✓
265/50R20	111S XL	-	8 1/2J	277	774	1090	2403	340/50	400/A/A	BSW/WSW	✓	✓	✓
275/55R20	117S XL	-	8 1/2J	284	810	1285	2833	340/50	400/A/A	BSW	✓	✓	✓
NEW 285/50R20	116TXL	-	9	297	794	1250	2756	340/50	400/A/A	BSW	✓	✓	✓
NEW 285/55R20	119S XL	-	9J	297	822	1360	2998	340/50	400/A/A	BSW	✓	✓	✓
NEW 305/50R20	120S XL	-	9 1/2J	316	814	1400	3086	340/50	400/A/A	BSW	✓	✓	✓
215R15C	112/110S	8PR	6J	218	725	1120/1060	2469/2337	450/65	-	BSW	✓	✓	✓
LT215/75R15	100/97Q	6PR	6J	216	703	800/730	1765/1610	350/50	-	WSW	✓	✓	✓
LT235/75R15	104/101S	6PR	6 1/2J	235	733	900/825	1985/1820	350/50	-	WSW	✓	✓	✓
245/75R15C	109/107S	6PR	7J	248	749	1030/975	2271/2149	375/54	-	BSW	✓	✓	✓
255/70R15C	112/110S	6PR	7 1/2J	260	739	1120/1060	2469/2337	375/54	-	BSW	✓	✓	✓
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1874	475/69	-	BSW	✓	✓	✓
205R16C	110/108S	8PR	6J	208	736	1060/1000	2337/2205	450/65	-	WSW	✓	✓	✓
LT215/85R16	115/112Q	10PR	6J	216	772	1215/1120	2679/2469	575/84	-	WSW	✓	✓	✓
LT245/70R16	113/110S	8PR	7J	248	750	1150/1060	2535/2335	450/65	-	WSW	✓	✓	✓
LT265/70R16	121/118S	10PR	8J	272	778	1450/1320	3195/2910	550/80	-	WSW	✓	✓	✓
LT265/75R16	123/120Q	10PR	7 1/2J	267	804	1550/1400	3415/3085	550/80	-	BSW	-	-	-
LT285/75R16	126/123Q	10PR	8J	286	834	1700/1550	3750/3415	550/80	-	BSW	-	-	-
LT245/65R17	111/108R	8PR	7J	248	750	1090/1000	2403/2205	450/65	-	WSW	✓	✓	✓
LT245/70R17	119/116S	10PR	7J	248	776	1360/1250	3000/2755	550/80	-	WSW	✓	✓	✓
LT245/75R17	121/118S	10PR	7J	248	800	1450/1320	3195/2910	550/80	-	WSW	✓	✓	✓
LT285/70R17	121/118Q	10PR	8 1/2J	292	832	1450/1320	3195/2910	550/80	-	BSW/WSW	✓	✓	✓
LT285/60R18	122/119Q	10PR	8 1/2J	292	799	1500/1360	3305/3000	550/80	-	BSW	-	-	-
LT285/65R18	125/122R	10PR	8 1/2J	292	827	1650/1500	3640/3305	550/80	-	WSW	-	-	-
LT325/60R18	124/121Q	10PR	9 1/2J	331	847	1600/1450	3525/3195	450/65	-	BSW	-	-	-
LT325/65R18	127/124Q	10PR	9 1/2J	331	879	1750/1600	3860/3525	450/65	-	BSW	-	-	-
31X10.50R15LT	109S	6PR	8 1/2J	268	775	1030	2270	350/50	-	WSW	✓	✓	✓


CONQUEWIND R/T

NEW



Open pattern shoulder design

Improve the longitudinal grip of the tires, and ensure the traction performance of muddy, gravel and snow roads.

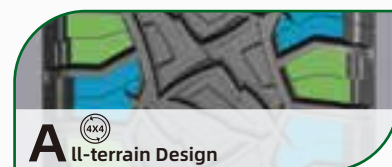

All-terrain Design

Staggered pattern shoulder design


The staggered shoulder shape is combined with stronger skeleton material to prevent the side rock from damaging the tire and improve the grip of the tire.



Driveability

Different Under-shoulder pattern design


Protect the tire shoulder and upper sidewall from damage, improve the grip of the tire on muddy roads, and improve the grip under low adhesion conditions with low air pressure, different of two shoulder design to meet the needs of different users on the tire appearance.

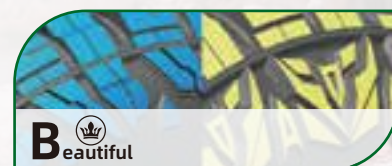

Beautiful

Large shoulder matching small flower pattern block design in the middle

Ensure the off-road performance of tires, improve the comfort of pavement, and realize the perfect combination of off-road and road driving performance.

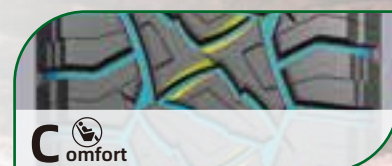

Comfort

Composite pitch fit pitch random arrangement design

Improve tire grip and comfort, and reduce tire regular noise.



Silence Design


Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	UTQG	Sidewall			
						(kg)	(Lbs)						
27X8.50R14LT	95Q	6PR	7J	218	674	690	1520	350/50	-	WSW	-	-	-
235/75R15	109Q XL	-	6 1/2J	235	733	1030	2271	340/50	560/A/B	WSW	-	-	-
31X10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	-	WSW	-	-	-
33X12.50R15LT	108Q	6PR	10J	318	826	1000	2205	250/35	-	WSW	-	-	-
235/70R16	109Q XL	-	7J	240	736	1030	2271	340/50	560/A/B	WSW	-	-	-
255/70R16	111Q	-	7 1/2J	260	764	1090	2403	300/44	560/A/B	WSW	-	-	-
265/70R16	116Q XL	-	8J	272	778	1250	2756	340/50	560/A/B	WSW	-	-	-
LT245/75R16	120/116Q	10PR	7J	248	774	1380/1260	3042/2778	550/80	-	WSW	-	-	-
245/75R16	111Q	-	7J	248	774	1090	2403	300/44	560/A/B	WSW	-	-	-
LT265/75R16	119/116Q	8PR	7 1/2J	267	804	1360/1250	3000/2755	450/65	-	WSW	-	-	-
LT285/75R16	116/113Q	6PR	8J	286	834	1250/1150	2755/2535	350/50	-	WSW	-	-	-
265/65R17	116Q XL	-	8J	272	776	1250	2756	340/50	560/A/B	WSW	-	-	-
35X12.50R17LT	121Q	10PR	10J	318	877	1450	3195	450/65	-	WSW	-	-	-
LT265/70R17	118/115Q	8PR	8J	272	804	1320/1215	2910/2680	450/65	-	WSW	-	-	-
265/70R17	115Q	-	8J	272	804	1215	2679	300/44	560/A/B	WSW	-	-	-
LT285/70R17	116/113Q	6PR	8 1/2J	292	832	1250/1150	2755/2535	350/50	-	WSW	-	-	-
265/60R18	114Q XL	-	8J	272	775	1180	2601	340/50	560/A/B	WSW	-	-	-
265/65R18	116Q XL	-	8J	272	801	1250	2756	340/50	560/A/B	WSW	-	-	-
275/65R18	116Q XL	-	8J	279	815	1250	2756	340/50	560/A/B	WSW	-	-	-
33X12.50R18LT	118Q	10PR	10J	318	826	1320	2910	450/65	-	WSW	-	-	-
35X12.50R18LT	118Q	8PR	10J	318	877	1320	2910	350/50	-	WSW	-	-	-
LT285/65R18	121/118Q	8PR	8 1/2J	292	827	1450/1320	3195/2910	450/65	-	WSW	-	-	-
265/50R20	111Q XL	-	8 1/2J	277	774	1090	2403	340/50	560/A/B	WSW	-	-	-
275/60R20	116Q XL	-	8J	279	838	1250	2756	340/50	560/A/B	WSW	-	-	-
33X12.50R20LT	114Q	10PR	10J	318	826	1180	2600	450/65	-	WSW	-	-	-
35X12.50R20LT	121Q	10PR	10J	318	877	1450	3195	450/65	-	WSW	-	-	-
LT285/55R20	117/114Q	8PR	9J	297	822	1285/1180	2835/2600	450/65	-	WSW	-	-	-
285/45R22	114Q XL	-	9 1/2J	285	815	1180	2601	340/50	560/A/B	WSW	-	-	-
33X12.50R22LT	109Q	10PR	10J	318	826	1030	2270	450/65	-	WSW	-	-	-
35X12.50R22LT	117Q	10PR	10J	318	877	1285	2835	450/65	-	WSW	-	-	-

PREDATOR M/T




Tread bionic "shark', block design

Better embedded with off-road complex terrain to enhance the grip of tires.

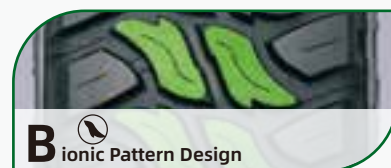


Widen and deepen the groove design

Good heat dissipation, good self-cleaning performance and strong grip, suitable for all kinds of complex road conditions.

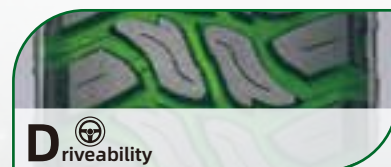


The shoulder pattern adopts the silt self-cleaning technology and the stone ejection groove

The sludge accumulated in the groove automatically removed in rotation and the stone ejected to ensure safe and smooth driving.

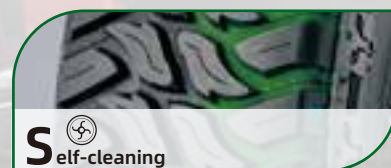

Sidewall bionic decorative design

The thickened sidewall matched with the bionic pattern to improve impact and damage resistance while meeting the individual needs of consumers.

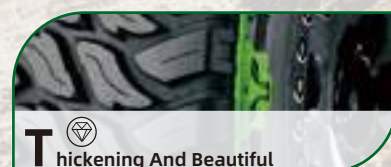

Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	WSW			POR
LT235/75R15	104/101Q	6PR	6 1/2J	235	733	900/825	1985/1820	350/50	WSW			POR
LT235/70R16	110/107Q	8PR	7J	240	736	1060/975	2335/2150	450/65	WSW			POR
LT265/75R16	119/116Q	8PR	7 1/2J	267	804	1360/1250	3000/2755	450/65	WSW			POR
LT265/75R16	123/120Q	10PR	7 1/2J	267	804	1500/1400	3415/3085	550/80	WSW			POR
NEW LT265/65R17	120/117Q	10PR	8J	272	782	1400/1285	3085/2835	550/80	WSW			POR
LT265/70R17	121/118Q	10PR	8J	272	804	1450/1320	3195/2910	550/80	WSW			POR
LT285/75R16	116/113Q	6PR	8J	286	834	1250/1150	2755/2535	350/50	WSW			POR
LT285/75R16	126/123Q	10PR	8J	286	834	1700/1550	3750/3415	550/80	WSW			POR
LT285/70R17	121/118Q	8PR	8 1/2J	292	832	1450/1320	3195/2910	450/65	WSW			POR
LT245/70R16	118/115Q	10PR	7J	248	750	1320/1215	2910/2680	550/80	WSW			POR
31X10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	WSW			POR
35X12.50R15LT	113Q	6PR	10J	318	877	1150	2535	250/35	WSW			POR
35X12.50R17LT	121Q	10PR	10J	318	877	1450	3195	450/65	WSW			POR
33X12.50R18LT	118Q	10PR	10J	318	826	1320	2910	450/65	WSW			POR
33X12.50R20LT	114Q	10PR	10J	318	826	1180	2600	450/65	WSW			POR
35X12.50R18LT	118Q	8PR	10J	318	877	1320	2910	350/50	WSW			POR
35X12.50R20LT	121Q	10PR	10J	318	877	1450	3195	450/65	WSW			POR
NEW 33X12.50R22LT	109Q	10PR	10J	318	832	1030	2270	450/65	BSW			POR



DRAK M/T




Pyramid-shaped pattern

Pyramid-shaped pattern design improves grip and traction on muddy and sandstone roads.




Self-cleaning grooves

Slush self-cleaning and rejection groove design guarantee a safe and smooth driving.

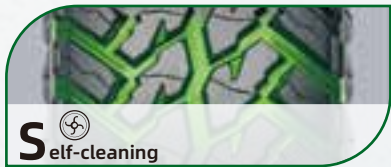


Rigidity shoulder

The shoulder extends to sidewall tread block design greatly protect the tire from external puncture or injury.

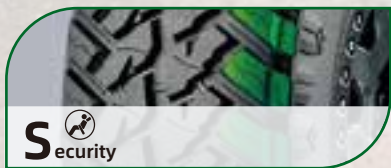

Anti-skip design

A mass of steel sheets and grooves design provide great grip ability and driving performance on wetland.

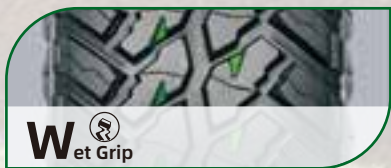


Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
31x10.50R15LT	109Q	6PR	8 1/2J	268	775	1030	2270	350/50	BSW			POR
32X11.50R15LT	113Q	6PR	9 J	290	801	1150	2535	350/50	BSW			POR
33X12.50R15LT	108Q	6PR	10J	318	826	1000	2205	250/35	BSW			POR
33X12.50R17LT	120Q	10PR	10 J	318	826	1400	3085	450/65	BSW			POR
LT215/75R15	100/97Q	6PR	6 J	216	703	800/730	1765/1610	350/50	BSW			POR
LT235/75R15	104/101Q	6PR	6 1/2J	235	733	900/825	1985/1820	350/50	BSW			POR
LT215/85R16	115/112Q	10PR	6 J	216	772	1215/1120	2680/2470	550/80	BSW			POR
LT225/75R16	115/112N	10PR	6 J	223	744	1215/1120	2680/2470	550/80	BSW			POR
LT235/85R16	120/116Q	10PR	6 1/2J	235	806	1380/1260	3042/2778	550/80	BSW			POR
LT245/75R16	120/116N	10PR	7 J	248	774	1380/1260	3042/2778	550/80	BSW			POR
LT305/70R16	124/121P	10PR	9 J	311	834	1600/1450	3525/3195	450/65	BSW			POR
LT315/75R16	127/124Q	10PR	8 1/2J	313	878	1750/1600	3860/3525	450/65	BSW			POR




ICEHAWKE I

**New directional tread pattern design**

This design not only maximized the traction, but also enhanced the drainage and snow removal capabilities.

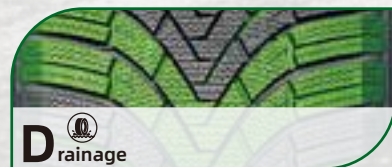**Multiple groove mixed design**


This design suitable for various roads, well balanced the grip and handling on different ice and snow roads, provides extra grooves on the tire surface, and increased the grip.

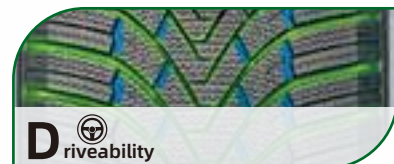**Innovative optimization design of bionic wave-shaped high-density groove**

This design enabled the tire rubber block to have up to 2500 tread grooves, It is more conducive to tread deformation in snowy weather, thereby providing more traction and enhancing handling.

**Tread pattern noise reduction design**

This design effectively disperses the noise frequency, bringing a quiet and comfortable driving experience to the driver.

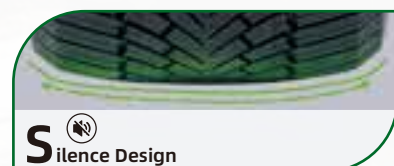**Special formula designed for ice and snow road conditions to escort driving in winter**


Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
145/70R13	71T	4.50B	150	534	345	761	300/44	BSW	✓	✓	✓
145/80R13	75T	4.00B	145	562	387	853	300/44	BSW	✓	✓	✓
155/65R13	73T	4.50B	157	532	365	805	300/44	BSW	✓	✓	✓
155/70R13	75T	4.50B	157	548	387	853	300/44	BSW	✓	✓	✓
155/80R13	79T	4.50B	157	578	437	963	300/44	BSW	✓	✓	✓
165/70R13	79T	5.00B	170	562	437	963	300/44	BSW	✓	✓	✓
165/80R13	83T	4.50B	165	594	487	1074	300/44	BSW	✓	✓	✓
175/65R13	80T	5.00B	177	558	450	992	300/44	BSW	✓	✓	✓
175/70R13	82T	5.00B	177	576	475	1047	300/44	BSW	✓	✓	✓

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
155/65R14	75T	4 1/2J	157	558	387	853	300/44	BSW	✓	✓	✓
165/60R14	75H	5J	170	554	387	853	300/44	BSW	✓	✓	✓
165/65R14	79T	5J	170	570	437	963	300/44	BSW	✓	✓	✓
165/70R14	81T	5J	170	588	462	1019	300/44	BSW	✓	✓	✓
175/65R14	82T	5J	177	584	475	1047	300/44	BSW	✓	✓	✓
175/70R14	84T	5J	177	602	500	1102	300/44	BSW	✓	✓	✓
185/55R14	80H	6J	194	560	450	992	300/44	BSW	✓	✓	✓
185/60R14	82T	5 1/2J	189	578	475	1047	300/44	BSW	✓	✓	✓
185/65R14	86T	5 1/2J	189	596	530	1168	300/44	BSW	✓	✓	✓
185/70R14	88T	5 1/2J	189	616	560	1235	300/44	BSW	✓	✓	✓
195/60R14	86H	6J	201	590	530	1168	300/44	BSW	✓	✓	✓
195/65R14	89H	6J	201	610	580	1279	300/44	BSW	✓	✓	✓
195/70R14	91T	6J	201	630	615	1356	300/44	BSW	✓	✓	✓
165/60R15	81H XL	5J	170	579	462	1019	340/50	BSW	✓	✓	✓
165/65R15	81T	5J	170	595	462	1019	300/44	BSW	✓	✓	✓
175/55R15	77H	5 1/2J	182	573	412	908	300/44	BSW	✓	✓	✓
175/60R15	81H	5J	177	591	462	1019	300/44	BSW	✓	✓	✓
175/65R15	84T	5J	177	609	500	1102	300/44	BSW	✓	✓	✓
185/55R15	82H	6J	194	585	475	1047	300/44	BSW	✓	✓	✓
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	BSW	✓	✓	✓
185/65R15	88T	5 1/2J	189	621	560	1235	300/44	BSW	✓	✓	✓
195/50R15	82V	6J	201	577	475	1047	300/44	BSW	✓	✓	✓
195/55R15	85H	6J	201	595	515	1135	300/44	BSW	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	BSW	✓	✓	✓
195/65R15	95T XL	6J	201	635	690	1521	340/50	BSW	✓	✓	✓
205/60R15	91H	6J	209	627	615	1356	300/44	BSW	✓	✓	✓
205/65R15	94H	6J	209	647	670	1477	300/44	BSW	✓	✓	✓
205/70R15	96T	6J	209	669	710	1565	300/44	BSW	✓	✓	✓
215/65R15	96H	6 1/2J	221	661	710	1565	300/44	BSW	✓	✓	✓
185/50R16	81V	6J	194	592	462	1019	300/44	BSW	✓	✓	✓
185/55R16	83H	6J	194	610	487	1074	300/44	BSW	✓	✓	✓
185/60R16	86H	5 1/2J	189	628	530	1168	300/44	BSW	✓	✓	✓
195/45R16	84V XL	6 1/2J	195	582	500	1102	340/50	BSW	✓	✓	✓
195/50R16	84V	6J	201	602	500	1102	300/44	BSW	✓	✓	✓
195/55R16	91H XL	6J	201	620	615	1356	340/50	BSW	✓	✓	✓
205/45R16	87V XL	7J	206	590	545	1201	340/50	BSW	✓	✓	✓
205/50R16	91V XL	6 1/2J	214	612	615	1356	340/50	BSW	✓	✓	✓
205/55R16	91H	6 1/2J	214	632	615	1356	300/44	BSW	✓	✓	✓
205/60R16	92H	6J	209	652	630	1389	300/44	BSW	✓	✓	✓
205/65R16	95H	6J	209	672	690	1521	300/44	BSW	✓	✓	✓
215/45R16	90V XL	7J	213	600	600	1323	340/50	BSW	✓	✓	✓
215/55R16	97H XL	7J	226	642	730	1609	340/50	BSW	✓	✓	✓
215/60R16	99H XL	6 1/2J	221	664	775	1709	340/50	BSW	✓	✓	✓
215/65R16	98T	6 1/2J	221	686	750	1653	300/44	BSW	✓	✓	✓
225/55R16	95H	7J	233	654	690	1521	300/44	BSW	✓	✓	✓
225/60R16	98H	6 1/2J	228	676	750	1653	300/44	BSW	✓	✓	✓
225/65R16	100T	6 1/2J	228	698	800	1764	300/44	BSW	✓	✓	✓
205/40R17	84V XL	7 1/2J	212	596	500	1102	340/50	BSW	✓	✓	✓
205/45R17	88V XL	7J	206	616	560	1235	340/50	BSW	✓	✓	✓
205/50R17	93H XL	6 1/2J	214	638	650	1433	340/50	BSW	✓	✓	✓
205/55R17	95H XL	6 1/2J	214	658	690	1521	340/50	BSW	✓	✓	✓
215/40R17	87V XL	7 1/2J	218	604	545	1201	340/50	BSW	✓	✓	✓
215/45R17	91V XL	7J	213	626	615	1356	340/50	BSW	✓	✓	✓
215/50R17	95H XL	7J	226	648	690	1521	340/50	BSW	✓	✓	✓
215/55R17	98V XL	7J	226	668	750	1653	340/50	BSW	✓	✓	✓
225/45R17	94V XL	7 1/2J	225	634	670	1477	340/50	BSW	✓	✓	✓
225/50R17	98H XL	7J	233	658	750	1653	340/50	BSW	✓	✓	✓
225/55R17	101H XL	7J	233	680	825	1819	340/50	BSW	✓	✓	✓
235/45R17	97H XL	8J	236	644	730	1609	340/50	BSW	✓	✓	✓
235/55R17	103H XL	7 1/2J	245	690	875	1929	340/50	BSW	✓	✓	✓
245/40R17	95V XL	8 1/2J	248	628	690	1521	340/50	BSW	✓	✓	✓
245/45R17	99V XL	8J	243	652	775	1709	340/50	BSW	✓	✓	✓
215/45R18	93V XL	7J	213	651	650	1433	340/50	BSW	✓	✓	✓
215/55R18	99H XL	7J	226	693	775	1709	340/50	BSW	✓	✓	✓
225/40R18	92H XL	8J	230	637	630	1389	340/50	BSW	✓	✓	✓
225/45R18	95H XL	7 1/2J	225	659	690	1521	340/50	BSW	✓	✓	✓
225/50R18	99H XL	7J	233	683	775	1709	340/50	BSW	✓	✓	✓
225/55R18	98H	7J	233	705	750	1653	300/44	BSW	✓	✓	✓
235/40R18	95V XL	8 1/2J	241	645	690	1521	340/50	BSW	✓	✓	✓
235/45R18	98H XL	8J	236	669	750	1653	340/50	BSW	✓	✓	✓
235/50R18	97V	7 1/2J	245	693	730	1609	300/44	BSW	✓	✓	✓
235/55R18	104H XL	7 1/2J	245	715	900	1984	340/50	BSW	✓	✓	✓
245/40R18	97V XL	8 1/2J	248	653	730	1609	340/50	BSW	✓	✓	✓
245/45R18	100H XL	8J	243	677	800	1764	340/50	BSW	✓	✓	✓
245/50R18	104H XL	7 1/2J	253	703	900	1984	340/50	BSW	✓	✓	✓
255/40R18	99H XL	9J	260	661	775	1709	340/50	BSW	✓	✓	✓
255/45R18	99V	8 1/2J	255	687	775	1709	300/44	BSW	✓	✓	✓
225/40R19	93V XL	8J	230	663	650	1433	340/50	BSW	✓	✓	✓
225/45R19	96V XL	7 1/2J	225	685	710	1565	340/50	BSW	✓	✓	✓
225/55R19	99H	7J	233	731	775	1709	300/44	BSW	✓	✓	✓
235/35R19	91V XL	8 1/2J	241	647	615	1356	340/50	BSW	✓	✓	✓
235/45R19	99V XL	8J	236	695	775	1709	340/50	BSW	✓	✓	✓
235/50R19	103V XL	7 1/2J	245	719	875	1929	340/50	BSW	✓	✓	✓
235/55R19	105H XL	7 1/2J	245	741	925	2039	340/50	BSW	✓	✓	✓
245/40R19	98V XL	8 1/2J	248	679	750	1653	340/50	BSW	✓	✓	✓
245/45R19	102H XL	8J	243	703	850	1874	340/50	BSW	✓	✓	✓
245/50R19	105H XL	7 1/2J	253	729	925	2039	340/50	BSW	✓	✓	✓
255/35R19	96V XL	9J	260	661	710	1565	340/50	BSW	✓	✓	✓
255/40R19	100H XL	9J	260	687	800	1764	340/50	BSW	✓	✓	✓
255/45R19	104H XL	8 1/2J	255	713	900	1984	340/50	BSW	✓	✓	✓
235/55R20	105H XL	7 1/2J	245	766	925	2039	340/50	BSW	✓	✓	✓
245/35R20	95V XL	8 1/2J	248	680	690	1521	340/50	BSW	✓	✓	✓
245/40R20	99V XL	8 1/2J	248	704	775	1709	340/50	BSW	✓	✓	✓
245/45R20	103V XL	8J	243	728	875	1929	340/50	BSW	✓	✓	✓
245/50R20	105H XL	7 1/2J	253	754	925	2039	340/50	BSW	✓	✓	✓
255/35R20	97V XL	9J	260	686	730	1609	340/50	BSW	✓	✓	✓
255/40R20	101V XL	9J	260	712	825	1819	340/50	BSW	✓	✓	✓
255/45R20	105V XL	8 1/2J	255	738	925	2039	340/50	BSW	✓	✓	✓


ICEHAWKE II

**Optimal of tread pattern of directional tire**


The single-guide and wide block design of shoulder chamfer can maximize the traction and the anti-skid performance and traction on the corners while improving the grip.

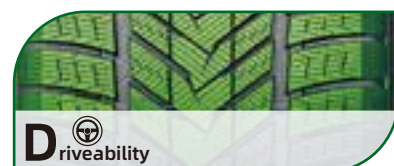**Special vertical and horizontal groove staggered design**

The special staggered design of longitudinal and lateral grooves can effectively disperse the noise frequency and shorten the braking distance by 50% on icy and snowy roads.

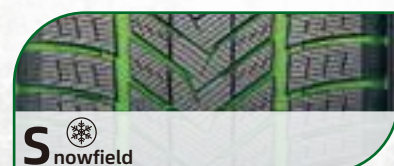**Combination design of S-shaped and I-shaped groove**

The combined design of S-shaped fine grooves and I-shaped straight grooves further strengthens the tire contact area and ensures the grip and guidance of snowy and slippery roads.

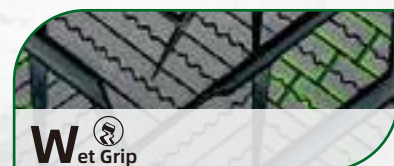**New silica formula design**

The new silica formula design keeps the rubber soft at -30°C to -40°C, can better fit the road surface, and increase the tire contact area and the friction coefficient between the tread and the ice surface.



Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
255/55R18	109H XL	8J	265	737	1030	2271	340/50	BSW	✓	✓	✓
265/35R18	97V XL	9 1/2J	271	643	730	1609	340/50	BSW	✓	✓	✓
245/55R19	107H XL	7 1/2J	253	753	975	2149	340/50	BSW	✓	✓	✓
255/50R19	107H XL	8J	265	739	975	2149	340/50	BSW	✓	✓	✓
255/55R19	111H XL	8J	265	763	1090	2403	340/50	BSW	✓	✓	✓
275/35R19	100V XL	9 1/2J	278	675	800	1764	340/50	BSW	✓	✓	✓
275/40R19	105V XL	9 1/2J	278	703	925	2039	340/50	BSW	✓	✓	✓
285/45R19	111H XL	9 1/2J	285	739	1090	2403	340/50	BSW	✓	✓	✓
255/50R20	109H XL	8J	265	764	1030	2271	340/50	BSW	✓	✓	✓
255/55R20	110H XL	8J	265	788	1060	2337	340/50	BSW	✓	✓	✓
265/45R20	108H XL	9J	266	746	1000	2205	340/50	BSW	✓	✓	✓
275/35R20	102H XL	9 1/2J	278	700	850	1874	340/50	BSW	✓	✓	✓
275/40R20	106H XL	9 1/2J	278	728	950	2094	340/50	BSW	✓	✓	✓
275/45R20	110H XL	9J	273	756	1060	2337	340/50	BSW	✓	✓	✓
275/50R20	113H XL	8 1/2J	284	784	1150	2535	340/50	BSW	✓	✓	✓
275/55R20	117S XL	8 1/2J	284	810	1285	2833	340/50	BSW	✓	✓	✓
285/50R20	116H XL	9J	297	794	1250	2756	340/50	BSW	✓	✓	✓
305/40R20	112H XL	11J	313	752	1120	2469	340/50	BSW	✓	✓	✓
315/35R20	110V XL	11J	320	728	1060	2337	340/50	BSW	✓	✓	✓
265/45R21	108H XL	9J	266	771	1000	2205	340/50	BSW	✓	✓	✓
275/40R21	107H XL	9 1/2J	278	753	975	2149	340/50	BSW	✓	✓	✓
275/45R21	110H XL	9J	273	781	1060	2337	340/50	BSW	✓	✓	✓
275/50R21	113H XL	8 1/2J	284	809	1150	2535	340/50	BSW	✓	✓	✓
285/40R21	109H XL	10J	290	761	1030	2271	340/50	BSW	✓	✓	✓
295/35R21	107H XL	10 1/2J	301	739	975	2149	340/50	BSW	✓	✓	✓
295/40R21	111H XL	10 1/2J	301	769	1090	2403	340/50	BSW	✓	✓	✓
315/35R21	111H XL	11J	320	753	1090	2403	340/50	BSW	✓	✓	✓
315/40R21	115H XL	11J	320	785	1215	2679	340/50	BSW	✓	✓	✓
275/40R22	107H XL	9 1/2J	278	779	975	2149	340/50	BSW	✓	✓	✓
245/40R19	98V XL	8 1/2J	248	679	750	1653	340/50	BSW	✓	✓	✓
245/45R19	102H XL	8J	243	703	850	1874	340/50	BSW	✓	✓	✓
245/40R20	99V XL	8 1/2J	248	704	775	1709	340/50	BSW	✓	✓	✓
245/45R20	103V XL	8J	243	728	875	1929	340/50	BSW	✓	✓	✓
255/45R20	105V XL	8 1/2J	255	738	925	2039	340/50	BSW	✓	✓	✓
245/40R19	98V XL	8 1/2J	248	679	750	1653	340/50	BSW	✓	✓	✓
NEW 275/40R18	103H XL	9 1/2J	278	677	875	1929	340/50	BSW	✓	✓	✓
NEW 265/50R19	110H XL	8 1/2J	277	749	1060	2337	340/50	BSW	✓	✓	✓
NEW 275/55R19	111H	8 1/2J	284	785	1090	2403	300/44	BSW	✓	✓	✓
NEW 265/35R20	99H XL	9 1/2J	271	694	775	1709	340/50	BSW	✓	✓	✓
NEW 265/50R20	111H XL	8 1/2J	277	774	1090	2403	340/50	BSW	✓	✓	✓
NEW 275/30R20	97H XL	9 1/2J	278	674	730	1609	340/50	BSW	✓	✓	✓
NEW 285/30R20	99H XL	10J	290	680	775	1709	340/50	BSW	✓	✓	✓
NEW 315/35R22	111H XL	11J	320	779	1090	2403	340/50	BSW	✓	✓	✓

WINTER GL868



Asymmetric pattern design for winter tire

The high saturation pattern on the outside ensures the handling performance of the tire; the wide grooves in the inside ensure the drainage performance of the tire and prevent sideslip.



Zigzag longitudinal pattern groove on both sides


The zigzag groove design establishes a meshing effect between the tire and the snow surface, constantly pressing and displacing snow, and improving the stability of driving on snow. According to the width of the driving surface, the reasonable layout of 3-4 pattern longitudinal wide pattern groove efficient drainage, mud and snow, greatly improve the tire skid performance. At the same time, the segmented longitudinal continuous ribs provide excellent handling performance.



3D zigzag steel sheet design and optimized distribution

Inside: high-density steel sheet distribution to achieve the best traction/braking performance on snow and ice road;

Outside: relatively low density steel sheet distribution to maintain excellent handling performance

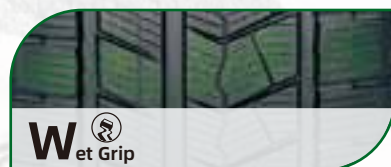

New Formulation design with silica

The tire using new formula design with silica makes the rubber still maintain viscoelastic properties even in -30°C to -40°C, and it can better fit the road, increase the tire contact area and the friction coefficient between the tread and the ice surface, so makes driving safer in winter when it rains and snows.



Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall				
					(kg)	(Lbs)						
155/65R13	73T	4.50B	157	532	365	805	300/44	BSW	✓	✓	✓	✓
155/70R13	75T	4 1/2J	157	548	387	853	300/44	BSW	✓	✓	✓	✓
165/70R13	79T	5.00B	170	562	437	963	300/44	BSW	✓	✓	✓	✓
155/65R14	75T	4 1/2J	157	558	387	853	300/44	BSW	✓	✓	✓	✓
165/65R14	79T	5J	170	570	437	963	300/44	BSW	✓	✓	✓	✓
165/70R14	85T XL	5J	170	588	515	1135	340/50	BSW	✓	✓	✓	✓
175/70R14	88T	5J	177	602	560	1235	340/50	BSW	✓	✓	✓	✓
185/60R14	82T	5 1/2J	189	578	475	1047	300/44	BSW	✓	✓	✓	✓
185/65R14	86H	5 1/2J	189	596	530	1168	300/44	BSW	✓	✓	✓	✓
195/60R14	86H	6J	201	590	530	1168	300/44	BSW	✓	✓	✓	✓
175/65R15	84T	5J	177	609	500	1102	300/44	BSW	✓	✓	✓	✓
185/60R15	84H	5 1/2J	189	603	500	1102	300/44	BSW	✓	✓	✓	✓
185/65R15	88H	5 1/2J	189	621	560	1235	300/44	BSW	✓	✓	✓	✓
195/55R15	85V	6J	201	595	515	1135	300/44	BSW	✓	✓	✓	✓
195/60R15	88H	6J	201	615	560	1235	300/44	BSW	✓	✓	✓	✓
195/65R15	95T	6J	201	635	690	1521	340/50	BSW	✓	✓	✓	✓
205/65R15	94H	6J	209	647	670	1477	300/44	BSW	✓	✓	✓	✓
215/70R15	98T	6 1/2J	221	683	750	1653	300/44	BSW	✓	✓	✓	✓
195/55R16	91H XL	6J	201	620	615	1356	340/50	BSW	✓	✓	✓	✓
195/60R16	89H	6J	201	640	580	1279	300/44	BSW	✓	✓	✓	✓
205/55R16	91H	6 1/2J	214	632	615	1356	300/44	BSW	✓	✓	✓	✓
205/60R16	96H	6J	209	652	710	1565	340/50	BSW	✓	✓	✓	✓
215/55R16	97H XL	7J	226	642	730	1609	340/50	BSW	✓	✓	✓	✓
215/60R16	99H	6 1/2J	221	664	775	1709	340/50	BSW	✓	✓	✓	✓
215/70R16	100T	6 1/2J	221	708	800	1764	300/44	BSW	✓	✓	✓	✓
225/70R16	107T XL	6 1/2J	228	722	975	2149	340/50	BSW	✓	✓	✓	✓
NEW 235/60R16	100H	7J	240	688	800	1764	300/44	BSW	✓	✓	✓	✓
245/70R16	111TXL	7J	248	750	1090	2403	340/50	BSW	✓	✓	✓	✓
265/70R16	112T	8J	272	778	1120	2469	300/44	BSW	✓	✓	✓	✓
205/50R17	93H XL	6 1/2J	214	638	650	1433	340/50	BSW	✓	✓	✓	✓
215/50R17	95H XL	7J	226	648	690	1521	340/50	BSW	✓	✓	✓	✓
215/55R17	98V	7J	226	668	750	1653	340/50	BSW	✓	✓	✓	✓
NEW 215/60R17	96H	6 1/2J	221	690	710	1565	300/44	BSW	✓	✓	✓	✓
225/50R17	98H XL	7J	233	658	750	1653	340/50	BSW	✓	✓	✓	✓
225/55R17	101V	7J	233	680	825	1819	340/50	BSW	✓	✓	✓	✓
NEW 225/60R17	99H	6 1/2J	228	702	775	1709	300/44	BSW	✓	✓	✓	✓
235/45R17	97H XL	8J	236	644	730	1609	340/50	BSW	✓	✓	✓	✓
235/55R17	103H XL	7 1/2J	245	690	875	1929	340/50	BSW	✓	✓	✓	✓
NEW 235/60R17	102H	7J	240	714	850	1873	300/44	BSW	✓	✓	✓	✓
235/65R17	108T XL	7J	240	738	1000	2205	340/50	BSW	✓	✓	✓	✓
NEW 245/65R17	107S	7J	248	750	975	2149	300/44	BSW	✓	✓	✓	✓
NEW 255/60R17	110T XL	7 1/2J	260	738	1060	2337	340/50	BSW	✓	✓	✓	✓
265/65R17	112T	8J	272	776	1120	2469	300/44	BSW	✓	✓	✓	✓
265/70R17	115T	8J	272	804	1215	2679	300/44	BSW	✓	✓	✓	✓
225/40R18	92H XL	8J	230	637	630	1389	340/50	BSW	✓	✓	✓	✓
225/45R18	95H XL	7 1/2J	225	659	690	1521	340/50	BSW	✓	✓	✓	✓
235/45R18	98H XL	8J	236	669	750	1653	340/50	BSW	✓	✓	✓	✓
NEW 225/60R18	104H XL	6 1/2J	228	727	900	1984	340/50	BSW	✓	✓	✓	✓
235/60R18	107H XL	7J	240	739	975	2149	340/50	BSW	✓	✓	✓	✓
245/40R18	97V XL	8 1/2J	248	653	730	1609	340/50	BSW	✓	✓	✓	✓
245/45R18	100H XL	8J	243	677	800	1764	340/50	BSW	✓	✓	✓	✓
NEW 245/60R18	105H	7J	248	751	925	2039	300/44	BSW	✓	✓	✓	✓
255/55R18	109H XL	8J	265	737	1030	2271	340/50	BSW	✓	✓	✓	✓
NEW 255/60R18	112T XL	7 1/2J	260	763	1120	2469	340/50	BSW	✓	✓	✓	✓
NEW 265/60R18	110T	8J	272	775	1060	2337	300/44	BSW	✓	✓	✓	✓
NEW 265/70R18	116S	8J	272	829	1250	2756	300/44	BSW	✓	✓	✓	✓
285/60R18	116H	8 1/2J	292	799	1250	2756	300/44	BSW	✓	✓	✓	✓
235/55R19	105H XL	7 1/2J	245	741	925	2039	340/50	BSW	✓	✓	✓	✓
245/45R19	102H XL	8J	243	703	850	1874	340/50	BSW	✓	✓	✓	✓
245/55R19	107H XL	7 1/2J	253	753	975	2149	340/50	BSW	✓	✓	✓	✓
255/50R19	107H XL	8J	265	739	975	2149	340/50	BSW	✓	✓	✓	✓
255/55R19	111H XL	8J	265	763	1090	2403	340/50	BSW	✓	✓	✓	✓
255/45R20	105V XL	8 1/2J	255	738	925	2039	340/50	BSW	✓	✓	✓	✓
275/40R20	106H XL	9 1/2J	278	728	950	2094	340/50	BSW	✓	✓	✓	✓
275/45R20	110H XL	9J	273	756	1060	2337	340/50	BSW	✓	✓	✓	✓
275/60R20	119HXL	8J	279	838	1360	2998	340/50	BSW	✓	✓	✓	✓
315/35R20	110VXL	11J	320	728	1060	2337	340/50	BSW	✓	✓	✓	✓
NEW 225/65R17	102H	6 1/2J	228	724	850	1874	300/44	BSW	✓	✓	✓	✓

WINTER GL989



The tacit connection of the longitudinal and transverse grooves complemented by a fine and tortuous sipe design

Effective elimination of snow and better grip to greatly increase the adhesion to ice and snow, eliminate hydroplaning and improve mud & snow shedding and self-cleaning performance.



Combination design of shoulder blocks and special sipe

Effectively equalize the rigidity of the block to ensure excellent turning performance and handling; combined design of the block and the sipe to significantly increase the number of lateral grooves without affecting the overall rigidity of the block, more and further balanced contact area on the snow and ice road for better braking performance.



Special compound design for winter pattern

Improve the traction and grip of winter tires on snow and ice.



Optimized contour design and layout

Provides smooth operation and even pressure distribution.



Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
NEW 165/70R14C	89/87R	6PR	5J	170	588	580/545	1279/1202	375/54	BSW	✓	✓	✓
NEW 175/65R14C	90/88T	6PR	5J	177	584	600/560	1323/1235	375/54	BSW	✓	✓	✓
NEW 175/70R14C	95/93T	6PR	5J	177	602	690/650	1521/1433	375/54	BSW	✓	✓	✓
175R14C	99/97R	8PR	5J	177	636	775/730	1709/1609	450/65	BSW	✓	✓	✓
185R14C	102/100R	8PR	5 1/2J	188	650	850/800	1874/1764	450/65	BSW	✓	✓	✓
195/70R15C	104/102R	8PR	6J	201	655	900/850	1984/1874	450/65	BSW	✓	✓	✓
205/70R15C	106/104R	8PR	6J	209	669	950/900	2094/1984	450/65	BSW	✓	✓	✓
215/65R15C	104/102R	6PR	6 1/2J	221	661	900/850	1984/1874	375/54	BSW	✓	✓	✓
215/70R15C	109/107R	8PR	6 1/2J	221	683	1030/975	2271/2149	450/65	BSW	✓	✓	✓
225/70R15C	112/110R	8PR	6 1/2J	228	697	1120/1060	2469/2337	450/65	BSW	✓	✓	✓
NEW 175/75R16C	98/96R	6PR	5J	177	668	750/710	1653/1565	375/54	BSW	✓	✓	✓
185/75R16C	104/102R	8PR	5J	184	684	900/850	1984/1874	475/69	BSW	✓	✓	✓
NEW 195/60R16C	99/97H	6PR	6J	201	640	775/730	1709/1609	375/54	BSW	✓	✓	✓
195/65R16C	104/102R	8PR	6J	201	660	900/850	1984/1874	475/69	BSW	✓	✓	✓
195/75R16C	107/105R	8PR	5 1/2J	196	698	975/925	2149/2039	475/69	BSW	✓	✓	✓
205/65R16C	107/105R	8PR	6J	209	672	975/925	2149/2039	475/69	BSW	✓	✓	✓
NEW 205/75R16C	110/108R	8PR	5 1/2J	203	714	1060/1000	2337/2204	475/69	BSW	✓	✓	✓
NEW 215/60R16C	103/101T	6PR	6 1/2J	221	664	875/825	1929/1819	375/54	BSW	✓	✓	✓
215/65R16C	109/107R	8PR	6 1/2J	221	686	1030/975	2271/2149	475/69	BSW	✓	✓	✓
215/75R16C	113/111R	8PR	6J	216	728	1150/1090	2535/2403	475/69	BSW	✓	✓	✓
225/65R16C	112/110R	8PR	6 1/2J	228	698	1120/1060	2469/2337	475/69	BSW	✓	✓	✓
NEW 225/75R16C	116/114R	8PR	6J	223	744	1250/1180	2756/2601	475/69	BSW	✓	✓	✓
235/65R16C	115/113R	8PR	7J	240	712	1215/1150	2679/2535	475/69	BSW	✓	✓	✓


ICEDEFENSOR STUD I

NEW



Design of continuous rib in crown center

It ensures the stability of straight line driving and the driving safety.

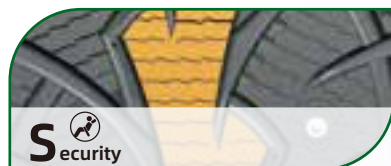


Balanced design

The directional pattern design ensures the grip on ice and snow, while taking into account the wear, rolling resistance and silent design. It is a classic tire with balanced comprehensive performance.


Wide driving surface plus square shoulder design

The tread area of the tire is increased, the stress is reduced, and the braking and starting performance of the tire is better.

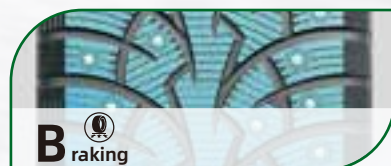

High stiffness shoulder design

The larger shoulder pattern block design matches the pattern block stiffness design, effectively improving the handling performance and wear performance.

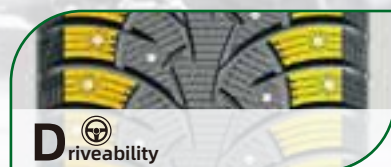

Nail hole protection design

Strengthen the rigidity of the tread block around the nail to prevent the drop of the insert or the tear of the nail hole during the driving process of the tire. The snowflake logo design makes the appearance of the tire more eye-catching and beautiful.



Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
155/70R13	75T	4.50B	157	548	387	853	300/44	BSW	✓	✓	✓
175/65R14	86T XL	5J	177	584	530	1168	340/50	BSW	✓	✓	✓
175/70R14	84T	5J	177	602	500	1102	300/44	BSW	✓	✓	✓
185/55R15	86T XL	6J	194	585	530	1168	340/50	BSW	✓	✓	✓
185/60R15	88T XL	5 1/2J	189	603	560	1235	340/50	BSW	✓	✓	✓
185/65R14	90T XL	5 1/2J	189	596	600	1323	340/50	BSW	✓	✓	✓
185/65R15	88T	5 1/2J	189	621	560	1235	300/44	BSW	✓	✓	✓
185/70R14	92T XL	5 1/2J	189	616	630	1389	340/50	BSW	✓	✓	✓
195/55R16	91T XL	6J	201	620	615	1356	340/50	BSW	✓	✓	✓
195/60R15	92T XL	6J	201	615	630	1389	340/50	BSW	✓	✓	✓
195/65R15	95TXL	6J	201	635	690	1521	340/50	BSW	✓	✓	✓
205/55R16	94T XL	6 1/2J	214	632	670	1477	340/50	BSW	✓	✓	✓
205/60R16	96T XL	6J	209	652	710	1565	340/50	BSW	✓	✓	✓
205/65R15	94T	6J	209	647	670	1477	300/44	BSW	✓	✓	✓
205/65R16	95T	6J	209	672	690	1521	300/44	BSW	✓	✓	✓
215/55R16	97T XL	7J	226	642	730	1609	340/50	BSW	✓	✓	✓
215/60R16	99T XL	6 1/2J	221	664	775	1709	340/50	BSW	✓	✓	✓
215/65R16	102T XL	6 1/2J	221	686	850	1874	340/50	BSW	✓	✓	✓
175/70R13	82T	5.00B	177	576	475	1047	300/44	BSW	✓	✓	✓
185/60R14	82T	5 1/2J	189	578	475	1047	300/44	BSW	✓	✓	✓
195/55R15	85H	6J	201	595	515	1135	300/44	BSW	✓	✓	✓

* New Developing Sizes / The Labeling Information are Subject to Change Without Notice



ICEDEFENSOR STUD II

NEW




Balanced design

The large V-shaped pattern design ensures the grip on ice and snow, while taking into account the wear, rolling resistance and silent design. It is a classic tire with balanced comprehensive performance.




Wide driving surface plus square shoulder design

The tread area of the tire is increased, the stress is reduced, and the braking and starting performance of the tire is better.

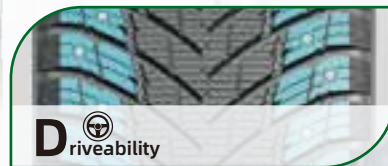

Widened guiding groove and serrated shoulder design

Effectively improve the tire snow removal ability under snow cover, and enhance the vehicle snow safety.

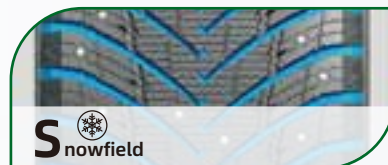

Nail hole protection design

Strengthen the rigidity of the tread block around the nail to prevent the drop of the insert nail or the tear of the nail hole during the driving process of the tire. The snowflake logo design makes the appearance of the tire more eye-catching and beautiful.



AB composite pitch design

The computer pitch is arranged irregularly based on genetic algorithm, which effectively reduces the tire noise and improves the comfort of drivers and passengers.



Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
255/55R20	110TXL	8J	265	788	1060	2337	340/50	BSW	✓	✓	✓
215/45R17	91TXL	7J	213	626	615	1356	340/50	BSW	✓	✓	✓
315/35R21	111T XL	11J	320	753	1090	2403	340/50	BSW	✓	✓	✓
205/50R17	93T XL	6 1/2J	214	638	650	1433	340/50	BSW	✓	✓	✓
215/50R17	95T XL	7J	226	648	690	1521	340/50	BSW	✓	✓	✓
215/55R17	98T XL	7J	226	668	750	1653	340/50	BSW	✓	✓	✓
215/55R18	95T	7J	226	693	690	1521	300/44	BSW	✓	✓	✓
225/40R18	92TXL	8J	230	637	630	1389	340/50	BSW	✓	✓	✓
225/45R17	94H XL	7 1/2J	225	634	670	1477	340/50	BSW	✓	✓	✓
225/45R18	95T XL	7 1/2J	225	659	690	1521	340/50	BSW	✓	✓	✓
225/50R17	98H XL	7J	233	658	750	1653	340/50	BSW	✓	✓	✓
225/50R18	99TXL	7J	233	683	775	1709	340/50	BSW	✓	✓	✓
225/55R17	101HXL	7J	233	680	825	1819	340/50	BSW	✓	✓	✓
225/55R18	102TXL	7J	233	705	850	1874	340/50	BSW	✓	✓	✓
235/35R19	91TXL	8 1/2J	241	647	615	1356	340/50	BSW	✓	✓	✓
235/45R17	97TXL	8J	236	644	730	1609	340/50	BSW	✓	✓	✓
235/45R18	98TXL	8J	236	669	750	1653	340/50	BSW	✓	✓	✓
235/50R18	101TXL	7 1/2J	245	693	825	1819	340/50	BSW	✓	✓	✓
235/50R19	103TXL	7 1/2J	245	719	875	1929	340/50	BSW	✓	✓	✓
235/55R17	103TXL	7 1/2J	245	690	875	1929	340/50	BSW	✓	✓	✓
235/55R20	102T	7 1/2J	245	766	850	1874	300/44	BSW	✓	✓	✓
245/40R18	97T XL	8 1/2J	248	653	730	1609	340/50	BSW	✓	✓	✓
245/40R19	98TXL	8 1/2J	248	679	750	1653	340/50	BSW	✓	✓	✓
245/40R20	99TXL	8 1/2J	248	704	775	1709	340/50	BSW	✓	✓	✓
245/45R18	100T XL	8J	243	677	800	1764	340/50	BSW	✓	✓	✓
245/45R19	98T	8J	243	703	750	1653	300/44	BSW	✓	✓	✓
255/35R19	96T XL	9J	260	661	710	1565	340/50	BSW	✓	✓	✓
255/45R19	104T XL	8 1/2J	255	713	900	1984	340/50	BSW	✓	✓	✓
255/45R20	101T	8 1/2J	255	738	825	1819	300/44	BSW	✓	✓	✓
255/50R19	103T	8J	265	739	875	1929	300/44	BSW	✓	✓	✓
275/35R20	102TXL	9 1/2J	278	700	850	1874	340/50	BSW	✓	✓	✓
275/40R20	102T	9 1/2J	278	728	850	1874	300/44	BSW	✓	✓	✓
275/40R21	107TXL	9 1/2J	278	753	975	2149	340/50	BSW	✓	✓	✓
275/40R22	107TXL	9 1/2J	278	779	975	2149	340/50	BSW	✓	✓	✓
275/45R20	110T XL	9J	273	756	1060	2337	340/50	BSW	✓	✓	✓
275/45R21	110T XL	9J	273	781	1060	2337	340/50	BSW	✓	✓	✓
275/50R20	113TXL	8 1/2J	284	784	1150	2535	340/50	BSW	✓	✓	✓
285/50R20	112T	9J	297	794	1120	2469	300/44	BSW	✓	✓	✓
295/40R21	107T	10 1/2J	301	769	975	2149	300/44	BSW	✓	✓	✓
315/35R20	106T	11J	320	728	950	2094	300/44	BSW	✓	✓	✓
255/35R18	94TXL	9J	260	635	670	1477	340/50	BSW	✓	✓	✓
255/40R18	99TXL	9J	260	661	775	1709	340/50	BSW	✓	✓	✓
275/40R18	103TXL	9 1/2J	278	677	875	1929	340/50	BSW	✓	✓	✓
275/40R19	105TXL	9 1/2J	278	703	925	2039	340/50	BSW	✓	✓	✓
315/35R22	111TXL	11J	320	779	1090	2403	340/50	BSW	✓	✓	✓




ICEDEFENSOR STUD III

NEW

**Pitch design of two in one composite design**

The computer pitch arrangement based on genetic algorithm effectively reduces the tire noise and improves the comfort of drivers and passengers.

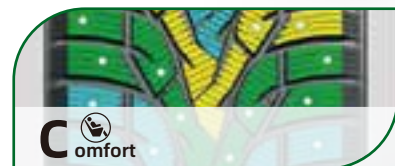

Comfort

Balanced design


It ensures the grip on ice and snow, and gives consideration to wear, rolling resistance and silent performance. It is a classic tire with balanced comprehensive performance.



Stability

Wide driving surface plus square shoulder design


The tread area of the tire is increased, the stress is reduced, and the braking and starting performance of the tire is better.

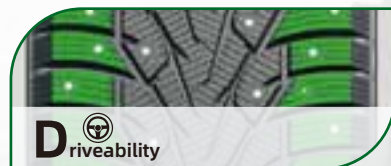

Driveability

Optimized nail position design

The optimized layout of the whole circumference of the studs effectively improves the ultra-high and even ice grip of the tires during driving. The anti drop nail hole design can effectively prevent the risk of the tire from dropping the studs during driving.

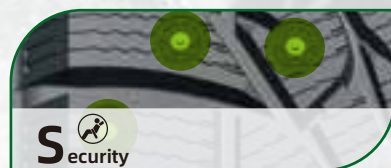

Security

Design of widened transverse and longitudinal ditches

Effectively improve the tire snow removal capacity under snow cover; The design of the central continuous pattern block and the high proportion of sea to land ratio maintain the rigidity of the tire and effectively improve the driving stability of the tire.



Snowfield

Size	LI/SI	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
					(kg)	(Lbs)					
185/75R16C	104/102R	5J	184	684	900/850	1985/1875	475/69	BSW	✓	✓	✓
195/75R16C	107/105R	5 1/2J	196	698	975/925	2150/2040	475/69	BSW	✓	✓	✓
235/65R16C	121/119R	7J	240	712	1450/1360	3195/3000	575/83	BSW	✓	✓	✓
225/75R16C	116/114R	6J	223	744	1250/1180	2755/2600	475/69	BSW	✓	✓	✓
LT225/75R16	115/112Q	6J	223	744	1215/1120	2680/2470	550/80	BSW	✓	✓	✓
LT275/60R20	119/116Q	8J	279	838	1360/1250	3000/2755	450/65	BSW	✓	✓	✓
LT275/60R20	123/120Q	8J	279	838	1550/1400	3415/3085	550/80	BSW	✓	✓	✓
275/60R20	115T	8J	279	838	1215	2679	300/44	BSW	✓	✓	✓
LT245/75R16	120/116Q	7J	248	774	1380/1260	3042/2778	550/80	BSW	✓	✓	✓
245/75R16	111T	7J	248	774	1090	2403	300/44	BSW	✓	✓	✓
LT265/70R17	121/118Q	8J	272	804	1450/1320	3195/2910	550/80	BSW	✓	✓	✓
265/70R17	115T	8J	272	804	1215	2679	300/44	BSW	✓	✓	✓
LT275/65R18	119/116Q	8J	279	815	1360/1250	3000/2755	450/65	BSW	✓	✓	✓
LT275/65R18	123/120Q	8J	279	815	1550/1400	3415/3085	550/80	BSW	✓	✓	✓
275/65R18	116T	8J	279	815	1250	2756	300/44	BSW	✓	✓	✓
215/60R17	100T XL	6 1/2J	221	690	800	1764	340/50	BSW	✓	✓	✓
215/65R17	103T XL	6 1/2J	221	712	875	1929	340/50	BSW	✓	✓	✓
215/70R16	100T	6 1/2J	221	708	800	1764	300/44	BSW	✓	✓	✓
225/60R17	103T XL	6 1/2J	228	702	875	1929	340/50	BSW	✓	✓	✓
225/60R18	104T XL	6 1/2J	228	727	900	1984	340/50	BSW	✓	✓	✓
225/65R17	106T XL	6 1/2J	228	724	950	2094	340/50	BSW	✓	✓	✓
225/70R16	107T XL	6 1/2J	228	722	975	2149	340/50	BSW	✓	✓	✓
235/55R18	104T XL	7 1/2J	245	715	900	1984	340/50	BSW	✓	✓	✓
235/55R19	105T XL	7 1/2J	245	741	925	2039	340/50	BSW	✓	✓	✓
235/60R18	103T	7J	240	739	875	1929	300/44	BSW	✓	✓	✓
235/65R17	108T XL	7J	240	738	1000	2205	340/50	BSW	✓	✓	✓
245/55R19	107T XL	7 1/2J	253	753	975	2149	340/50	BSW	✓	✓	✓
245/60R18	109T XL	7J	248	751	1030	2271	340/50	BSW	✓	✓	✓
245/70R16	111T XL	7J	248	750	1090	2403	340/50	BSW	✓	✓	✓
255/55R18	109T XL	8J	265	737	1030	2271	340/50	BSW	✓	✓	✓
255/55R19	107T	8J	265	763	975	2149	300/44	BSW	✓	✓	✓
265/60R18	114T XL	8J	272	775	1180	2601	340/50	BSW	✓	✓	✓
265/65R17	112T	8J	272	776	1120	2469	300/44	BSW	✓	✓	✓
275/55R20	117T XL	8 1/2J	284	810	1285	2833	340/50	BSW	✓	✓	✓



* New Developing Sizes / The Labeling Information are Subject to Change Without Notice




L-TRAVEL18




Reinforced polyester cord design

Reinforced polyester cord design greatly improve the load capacity of the tire and deliver a longer life under high load conditions.

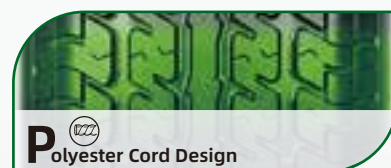

Three continuous no-breaking zigzag pattern design

Three continuous no-breaking zigzag pattern design in the middle tread enlarge the contact area between tire and road surface, deliver a smooth driving, even wear, and a long durability.

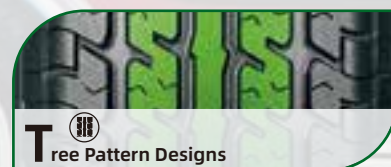

Size	LI/SI	PR	Rim	S/W (mm)	O/D (mm)	load Index		Max Pressure (Kpa/Psi)	Sidewall			
						(kg)	(Lbs)					
ST145R12	87L	8PR	4.50B	145	536	560	1220	450/65	BSW	✓	✓	✓
ST145R12	95L	10PR	4.50B	145	536	689	1520	550/80	BSW	✓	✓	✓
ST175/80R13	91/87L	6PR	5.00B	177	610	615/545	1360/1200	350/50	BSW	✓	✓	✓
ST185/80R13	99/95L	8PR	5.00B	184	626	775/690	1710/1520	450/65	BSW	✓	✓	✓
ST205/75R14	100/96L	6PR	5 1/2J	203	664	800/710	1760/1570	350/50	BSW	✓	✓	✓
ST205/75R14	105/101L	8PR	5 1/2J	203	664	925/825	2040/1820	450/65	BSW	✓	✓	✓
ST215/75R14	102/98L	6PR	6J	216	678	850/750	1870/1650	350/51	BSW	✓	✓	✓
ST205/75R15	101/97L	6PR	5 1/2J	203	689	825/730	1820/1610	350/50	BSW	✓	✓	✓
ST205/75R15	107/102L	8PR	5 1/2J	203	689	975/850	2150/1870	450/65	BSW	✓	✓	✓
ST225/75R15	113/108L	8PR	6J	223	719	1150/1000	2540/2200	450/65	BSW	✓	✓	✓
ST225/75R15	117/112L	10PR	6J	223	719	1285/1120	2830/2470	550/80	BSW	✓	✓	✓
ST225/75R15	107/102L	6PR	6J	223	719	975/850	2150/1870	350/50	BSW	✓	✓	✓
ST235/80R16	124/120L	10PR	6 1/2J	235	782	1600/1400	3420/3000	550/80	BSW	✓	✓	✓
ST235/85R16	125/121L	10PR	6 1/2J	235	806	1650/1450	3640/3200	550/80	BSW	✓	✓	✓
ST235/85R16	128/124L	12PR	6 1/2J	235	806	1800/1600	3960/3520	660/95	BSW	✓	✓	✓